

January 30, 2017

Government of Yukon
Department of Community Services
Infrastructure Development
Box 2703
Whitehorse, YT Y1A 2C6

ISSUED FOR USE
FILE: W14103567-21
Via Email: elise.bingeman@gov.yk.ca

Attention: Ms. Elise Bingeman, Senior Project Manager

Subject: Geotechnical Evaluation – Sanitary and Water Underground Utility Upgrades – South Section
Dawson City, YT

1.0 INTRODUCTION

1.1 General

Government of Yukon, Department of Community Services (YG-CS) retained Tetra Tech Canada Inc. (Tetra Tech) to complete a geotechnical evaluation for proposed upgrades to the sanitary and water underground utilities in Dawson City, YT. Ms. Elise Bingeman authorized the work by way of signed Government Contract C00035734, dated October 3, 2016.

YG-CS is planning to replace the lift station at the corner of York Street and Second Avenue, upgrade buried utilities along Second Avenue, King Street, Fifth Avenue, and Craig Street, and replace the hydraulic tower (buried vault) at the southeast end of Craig Street. For reporting purposes we have split the study area into two sections (North and South) with the division at the municipal wastewater treatment plant on Fifth Avenue.

For additional conditions regarding the use of this report, please refer to Tetra Tech's General Conditions included in Appendix A.

1.2 Scope of Services

Tetra Tech's scope of services for this project was presented in a proposal submitted to YG-CS on September 26, 2016 and is as follows:

- Review available historical geotechnical information from along the proposed utility route and surrounding areas;
- A geotechnical drilling program to characterize the subsurface conditions along the proposed utility route; and
- Prepare a report summarizing geotechnical conditions, and providing recommendations for trench excavation, pipe bedding, trench backfill, road surfacing, and pipe insulation as well as recommendations for foundation design and construction for the buried vault.

1.3 Project Location

The location of the project site is presented in Figure 1. The study area includes the path of the underground utilities running along Fifth Avenue and Craig Street; between the municipal wastewater treatment plant on Fifth Avenue and the buried vault at the southeast end of Craig Street.

2.0 GEOTECHNICAL SITE ASSESSMENT

The geotechnical site assessment was completed on November 3 and 4, 2016. Donjeck Drilling of Whitehorse, YT was retained by Tetra Tech to drill four boreholes (BH16-02, -03, -04, and -07) at the project site, as shown on Figure 1. The boreholes were advanced to final depths of 6.1 m except for BH16-02 which was terminated on bedrock at a final depth of 4.1 m. Prior to commencing the site assessment, underground utility locates were completed.

During the drilling program, the soil profile was logged by Tetra Tech’s field representative, Mr. Taidhg Mulroy, EIT, and both standard penetration test and disturbed grab samples were collected and returned to Tetra Tech’s Whitehorse laboratory for routine geotechnical index testing.

Upon drilling completion the UTM coordinates were recorded with a handheld GPS and the boreholes were backfilled to grade with drill cuttings and compacted by the drill.

3.0 SITE CONDITIONS

3.1 Surface Features

BH16-03 and -04 were drilled on existing roadways in Dawson City, where the topography followed the generally flat shape of the downtown area. BH16-02 and -07 were drilled on the cleared trail going up the hillside at the southeast end of Craig Street. The surrounding hillside was vegetated with brush, coniferous and deciduous trees. Exposed bedrock was also noted adjacent to the drilling locations.

3.2 Subsurface Conditions

The borehole logs and geotechnical laboratory test results included in Appendix B. Please note that the borehole logs and laboratory results contain detailed information describing the geotechnical conditions, and should be read in preference to the generalized descriptions provided below.

The soil profile at the buried vault site (BH16-02 and -07) consists of sand and gravel fill, over sand. The soil profile along the proposed utility alignment (BH16-03 and -04) consists of sand and gravel fill, underlain by silt or sand, over gravel and sand. The thicknesses of each soil unit encountered are summarized in Table 1.

Table 1: Summary of Subsurface Soil Conditions

Soil Type	Strata Depth Range (m)			
	BH16-02	BH16-03	BH16-04	BH16-07
SAND and GRAVEL (FILL)	-	0.0 – 1.2	0.0 – 0.9	0.0 – 0.3
ORGANIC SILT	-	1.2 – 1.7	-	-
SILT	-	1.7 – 2.3	-	-
SAND	0.0 – 4.1	2.3 – 4.0	0.9 – 4.7	0.3 – 6.1
GRAVEL AND SAND	-	4.0 – 6.1	4.7 – 6.1	-
End of Borehole	4.1	6.1	6.1	6.1

3.3 Groundwater Conditions

Possible groundwater was encountered in BH16-04 around 5.3 m below ground surface. However, material sloughed from the sides of the borehole before the groundwater elevation could be confirmed. Groundwater was not encountered in any of the other boreholes.

3.4 Permafrost and Seasonal Frost Penetration

Permafrost was not encountered in any of the boreholes.

Seasonal frost was encountered near surface in all boreholes. Based on the soil profile and regional climate data, the maximum depth of seasonal frost penetration can be assumed to be about 3.5 m below ground surface.

3.5 Soil Corrosivity

The granular and fine-grained (silt) soils that were encountered during the drilling program are considered non-corrosive as they are alluvial and fluvial deposits from the Klondike River Valley and are expected to have low Chloride and Sulphide concentrations.

4.0 DISCUSSION AND RECOMMENDATIONS

4.1 Underground Utility Replacement

4.1.1 Trench Excavation

Tetra Tech understands that the underground utility upgrades will be completed using conventional cut and cover trenching techniques with depths of installation between about 1.5 and 4.5 m below ground surface. At these depths, the exposed subgrade is generally anticipated to consist of sand with variable silt content. If possible, Tetra Tech recommends that the trench be excavated within the footprint of the existing underground utility alignment in order to reduce disturbance to native ground.

The project extents lie within the non-permafrost zone of Dawson City and although groundwater was not confirmed during the investigation, the region is hydraulically connected to the Yukon River. Depending on the time of year that construction occurs, groundwater may be encountered during utility trench excavation. As such, it will be necessary to have pumps readily available during construction, so that water can be managed.

As mentioned above the project extents lie within the non-permafrost zone of Dawson City but permafrost may still be encountered as pockets of permafrost are known to exist in this region. If permafrost is encountered and exposed to ambient summertime temperatures, it will likely begin thawing rapidly.

As the potential for wet or frozen soils at depth exists, the base of the trench should be immediately covered with non-woven geotextile filter fabric and with a 150 mm thick layer of 25 mm bedding stone (pipe bedding material as per the gradation specifications presented in the following Table 2) to protect the sensitive subgrade soil and provide a stable working surface during underground utility installation.

Table 2: Bedding Stone Gradation Specifications

Bedding Stone	
Sieve Size (mm)	% Passing By Mass
25.000	100
20.000	70 – 100
12.500	55 – 100
10.000	30 – 80
5.000	0 – 40
2.000	0 – 10

Trenching should be carried out in accordance with applicable *Occupational Health and Safety Regulations*. Trenches deeper than 1.2 m must be sloped or shored according to *Yukon Workers' Compensation Health and Safety Board Regulations* prior to workers entering the trench.

4.1.2 Trench Backfilling

As discussed above, 25 mm bedding stone is proposed for use as pipe bedding. This type of material can be considered to be practically self-compacting; however, nominal compaction effort (rodding, small plate tamper, or similar) should be applied during placement to ensure that the stone particles are well seated against one another and that no voids remain adjacent to or below the pipe. All pipe bedding should be fully encapsulated in non-woven geotextile filter fabric to prevent internal erosion and migration of fine particles into the bedding stone from the surrounding soils.

Tetra Tech understands that the remainder of the trench will be backfilled using the native and/or fill materials removed during the excavation, which is standard practice in Dawson City. This is considered acceptable, provided the backfill is placed in relatively thin lifts (approximately 150 mm maximum thickness), moisture conditioned and compacted to at least 95% Standard Proctor Maximum Dry Density (SPMDD as per ASTM D698) to within a depth of 1.0 m from final grade. The upper 1.0 m of trench backfill is to be placed in approximately 150 mm thick lifts, moisture conditioned and compacted to 98% SPMDD. Furthermore, we recommend that saturated and/or highly organic soils not be used as trench backfill, as these soils will likely prove difficult to place and compact.

The road surface should be re-established with at least 300 mm of compacted, well-graded gravel, in accordance with standard practice in Dawson City. Road surface materials should be placed in maximum 150 mm thick lifts, moisture conditioned and compacted to at least 98% SPMDD.

4.1.3 Insulation Requirements

Based on the standard 75 mm thickness of factory insulation installed on the outside of the pipe, additional insulation is not required.

4.1.4 Permafrost

If permafrost is encountered during excavation, some disturbance and localized thawing should be anticipated during underground utility installation. The impact of thawing permafrost can be reduced by staging construction activities to install the underground utilities in relatively small 20 to 30 m segments; thereby, minimizing the amount of time that the frozen soils are exposed to thawing conditions between excavation and backfilling.

Notwithstanding any measures taken to minimize thawing of permafrost (if encountered), some thaw and associated settlement should be anticipated beneath the underground utilities due to disturbance caused during installation as well as long-term climate change effects. If the new sewer is to be dependent on pipe gradient to operate effectively, the pipe should be installed at a steeper gradient, in accordance with standard practice in Dawson City, such that any settlement caused by permafrost thaw will not render it inoperable.

4.2 Vault Replacement

Based on the results of the drilling program, Tetra Tech considers a buried concrete foundation feasible to support the buried vault. For the purposes of this report, Tetra Tech has assumed that the underside of the buried vault will be up to 3 m below ground surface.

4.2.1 Site Preparation

Site preparation for the vault should be completed in accordance with the following recommendations:

- The existing ground should be excavated to a depth that will allow for the placement of 0.3 m of engineered fill beneath the vault foundation (approximately 3.3 m depth). The excavation should be completed such that there is minimal disturbance to the native sands encountered at the excavation base. The excavation should be shaped in accordance with applicable *Occupational Health and Safety Regulations*. Tetra Tech recommends that any large overhanging material (such as cobbles or boulders) be removed from the sidewalls. Shoring methods (wood or steel framed slipforms) should be used if steeper sidewall slopes are desired;
- The surficial sand and gravelly sand is considered suitable for reuse as backfill;
- The base of the excavation could be below the local groundwater elevation, resulting in seepage into the bottom of the excavation. Depending on the time of excavation (should consider April/May as the Yukon River elevation is typically at its lowest elevation), dewatering efforts may be required to prevent water accumulation. Upon completion of the excavation, the exposed subgrade should be inspected by a qualified geotechnical engineer to confirm that suitable bearing conditions have been achieved and to provide additional recommendations, if necessary;
- Backfill should be completed using suitable material stockpiled on site and/or 80 mm pit run gravel, placed in 200 mm lifts, moisture conditioned, and compacted to at least 98% Standard Proctor Maximum Dry Density (SPMDD). The recommended gradations for the 80 mm pit run gravel are provided in Table 3;
- A minimum 150 mm thick layer of 20 mm crushed basecourse should be placed immediately below the underside of footings for the vault. The 20 mm crushed basecourse should be moisture conditioned and compacted to at least 98% SPMDD. This will provide a smooth, level bearing surface on which to cast the

concrete foundations. The recommended gradations for the 20 mm crushed basecourse are provided on Table 3;

- The excavation around and above the vault should be backfilled with native material and/or 80 mm pit run gravel, placed in 200 mm lifts, moisture conditioned, and compacted to at least 98% SPMDD. Large rock particles should not be placed adjacent to the vault structure;
- The excavation must be protected from the inflow of surface water at all times and foundation elements should not be cast directly onto or over seasonally frozen soils.

Table 3: Recommended Gradation for Granular Fill Materials

80 mm Pit Run Gravel		20 mm Crushed Basecourse	
Particle Size (mm)	% Passing (by weight)	Particle Size (mm)	% Passing (by weight)
80	100	-	-
25	55 – 100	20	100
12.5	42 – 84	12.5	64 – 100
5.00	26 – 65	5.00	36 – 72
1.25	11 – 47	1.25	12 – 42
0.315	3 – 30	0.315	4 – 22
0.080	0 – 8	0.080	3 – 6

4.2.2 Foundation Design and Construction

4.2.2.1 Limit States Design

The 2015 edition of the National Building Code of Canada (NBCC 2015) stipulates that foundation design must be carried out using Limit State Design (LSD) methods. Under LSD, a minimum of two loading cases must be considered by geotechnical and structural designers; the Ultimate Limit State (ULS) and the Serviceability Limit State (SLS). The ULS and SLS bearing resistances are calculated differently. The ULS bearing resistance is the maximum pressure that can be applied to the soil without causing bearing failure. The SLS bearing pressure is the maximum allowable pressure required to limit the settlement to a tolerable amount. Both the ULS and SLS bearing resistances are highly dependent on soil properties and footing geometry, including the footing size, shape, and burial depth.

Resistance factors are applied to the calculated (unfactored) resistances to determine the maximum allowable factored design load. Geotechnical resistance factors for design of shallow foundations against vertical bearing failure (ULS), horizontal displacement (sliding under lateral loading), and overturning, per NBCC 2015, are provided in Table 4.

Table 4: Geotechnical Resistance Factors - Shallow Foundations

Item	Resistance Factor
Vertical Bearing Resistance (ULS)	0.5
Sliding (ULS)	0.8
Overturning (ULS)	0.5

4.2.2.2 Foundation Recommendations

As noted above, Tetra Tech considers a buried concrete foundation feasible to support the buried vault. As such, design and construction of the foundations at the site should be undertaken in accordance with the following recommendations:

- Tetra Tech has assumed a footing thickness of 0.3 m and an approximate depth of cover of 3.0 m from original ground to the underside of the footing for the vault;
- Unfactored bearing resistances are provided based on minimum footing dimensions of 0.4 m wide for strip footings, and 1 m square for spread footings. If significantly different footing sizes are preferred for this project, Tetra Tech should be notified to review and adjust the calculated bearing resistances, as necessary; and
- Unfactored bearing resistances for the wet well and building are provided below on Table 5. SLS bearing pressures have been calculated based on 25 mm of tolerable elastic settlement.

Table 5: Unfactored Bearing Resistances for Shallow Foundations

Limit State	Vault Foundation	
	1 m Spread Footings	0.4 m Strip Footings
ULS	230	160
SLS	550	550

4.2.2.3 Frost Protection

Frost heave is a common cause to foundation damage in cold climates and occurs when three conditions are satisfied; the ground temperature is below freezing, frost-susceptible soils are present, and the soil pore space is near 100% saturation. In this case, the native soils are considered to be frost-susceptible; however, these soils are to be excavated and replaced with non-frost-susceptible 80 mm pit run gravel and 20 mm crushed basecourse, therefore, Tetra Tech does not consider insulation necessary for this site.

4.2.3 Site Grading

Final site grading should enhance positive drainage and direct water away from the vault location. Ponding above or near the vault must be prevented, as infiltration to the foundation elements could have detrimental effects on structural elements.

4.2.4 Concrete

Concrete should be cast onto a clean, compacted, unfrozen, granular bearing surface. It is important that no loose and/or disturbed material be allowed to remain on the bearing surface. As noted above, foundation bearing surfaces should consist of 20 mm basecourse gravel, moisture conditioned and compacted to at least 98% SPMDD.

Tetra Tech recommends that all concrete be design, mixed, placed, and tested in accordance with the most recent edition of the Canadian Standards Association (CSA) Standard CAN/CSA-A23.1 and A23.2. According to these standards, concrete should be designed to at least satisfy the minimum durability requirements as defined by the exposure class.

The exposure class of the concrete is dependent on the presence or lack of chlorides, sulphates, freezing and thawing conditions, and the soil saturation. Based on the aforementioned recommendations, the governing

exposure class for the foundation system will be “F-2” where the concrete would be exposed to freezing, remain in unsaturated condition and not be exposed to chlorides. If these condition cannot be met, it is recommended that Tetra Tech be given the opportunity to review the concrete class recommendation.

In addition to the above, CAN/CSA-A23.1 also provides recommendations for cold weather concrete placement. These include protecting freshly placed concrete from freezing temperatures.

4.2.5 Seismic Site Classification

NBCC 2015 requires that a seismic site classification be established for proposed buildings. As such, Tetra Tech recommends that the lift station site be considered Site Classification D, per Table 4.1.8.4.A in NBCC 2015.

5.0 CONSTRUCTION TESTING AND MONITORING

All recommendations presented are site-specific and based on the assumption that an adequate level of monitoring during excavation, installation, and construction will be provided, and that all construction will be carried out by a suitably qualified, experienced contractor. An adequate level of construction monitoring also provides opportunity to verify that the recommendations based on geotechnical data obtained from the borehole are applicable to the entirety of the proposed utility alignment and vault site. Appropriate quality assurance and quality control testing should be undertaken during construction to confirm that construction is completed in accordance with the recommendations provided in this report.

Furthermore, it is recommended that Tetra Tech be given the opportunity to review the details of the final design related to the geotechnical aspects of the utility installation, prior to construction. Past experience has shown that this action may prevent inconsistencies, poor performance, and/or increased costs that may lead to disputes.

6.0 LIMITATIONS OF REPORT

This report and its contents are intended for the sole use of Government of Yukon, Department of Community Services and their agents. Tetra Tech Canada Inc. (operating as Tetra Tech) does not accept any responsibility for the accuracy of any of the data, the analysis, or the recommendations contained or referenced in the report when the report is used or relied upon by any Party other than Government of Yukon, Department of Community Services, or for any Project other than the proposed development at the subject site. Any such unauthorized use of this report is at the sole risk of the user. Use of this report is subject to the terms and conditions stated in Tetra Tech’s General Conditions that are provided in Appendix A of this report.

7.0 CLOSURE

We trust this report meets your present requirements. If you have any questions or comments, please contact the undersigned.

Respectfully submitted,
Tetra Tech Canada Inc.




Prepared by:
Taidhg Mulroy, E.I.T.
Geotechnical Engineer, Arctic Region
Direct Line: 867.668.9241
taidhg.mulroy@tetrattech.com



Reviewed by:
Chad Cowan, P.Eng.
Geotechnical Manager - Yukon, Arctic Region
Direct Line: 867.668.9214
chad.cowan@tetrattech.com

/chr

Attachments: Figures (1)
Appendix A: Tetra Tech's General Conditions
Appendix B: Borehole Logs and Laboratory Test Results

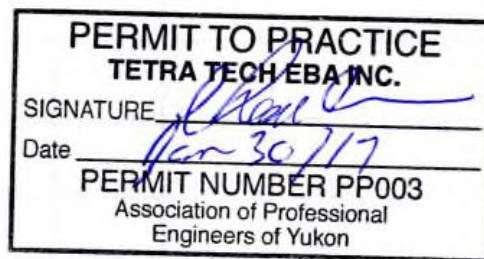

FIGURES


Figure 1 Site Plan Showing South Section Borehole Locations

Q:\Whitehorse\Data\0201\Drawings\Dawson City Area\W14103567-21 Dawson City Underground Utilities\W14103567-21 South Section.dwg [FIGURE 1] November 23, 2016 - 2:32:42 pm (BY: BUCHAN, CAMERON)



LEGEND

- BOREHOLE LOCATION
- UNDERGROUND UTILITY UPGRADE AREA



CLIENT

GEOTECHNICAL SERVICES
SANITARY AND WATER UNDERGROUND UTILITIES UPGRADE
DAWSON CITY, YUKON

SITE PLAN SHOWING
SOUTH SECTION BOREHOLE LOCATIONS

PROJECT NO. W14103567-21	DWN CB	CKD TM	REV 0
OFFICE EBA-WHSE	DATE November 23, 2016		

Figure 1

APPENDIX A

TETRA TECH'S GENERAL CONDITIONS

GENERAL CONDITIONS

GEOTECHNICAL REPORT – YUKON GOVERNMENT

This report incorporates and is subject to these “General Conditions”.

1.1 USE OF REPORT AND OWNERSHIP

This geotechnical report pertains to a specific site, a specific development and a specific scope of work. It is not applicable to any other sites nor should it be relied upon for types of development other than that to which it refers. Any variation from the site or development would necessitate a supplementary geotechnical assessment.

This report and the recommendations contained in it are intended for the sole use of TETRA TECH's Client, the Yukon Government. TETRA TECH does not accept any responsibility for the accuracy of any of the data, the analyses or the recommendations contained or referenced in the report when the report is used or relied upon by any party other than TETRA TECH's Client unless otherwise authorized in writing by TETRA TECH. Any unauthorized use of the report is at the sole risk of the user.

This report is subject to copyright and shall not be reproduced either wholly or in part without the prior, written permission of the Yukon Government, the Client, or TETRA TECH. It is acknowledged that the Yukon Government, the Client, may reproduce the report freely for internal usage.

1.2 ALTERNATE REPORT FORMAT

Where TETRA TECH submits both electronic file and hard copy versions of reports, drawings and other project-related documents and deliverables (collectively termed TETRA TECH's instruments of professional service), only the signed and/or sealed versions shall be considered final and legally binding. The original signed and/or sealed version archived by TETRA TECH shall be deemed to be the original for the Project.

Both electronic file and hard copy versions of TETRA TECH's instruments of professional service shall not, under any circumstances, no matter who owns or uses them, be altered by any party except TETRA TECH. TETRA TECH's instruments of professional service will be used only and exactly as submitted by TETRA TECH.

Electronic files submitted by TETRA TECH have been prepared and submitted using specific software and hardware systems. TETRA TECH makes no representation about the compatibility of these files with the Client's current or future software and hardware systems.

1.3 ENVIRONMENTAL AND REGULATORY ISSUES

Unless stipulated in the report, TETRA TECH has not been retained to investigate, address or consider and has not investigated, addressed or considered any environmental or regulatory issues associated with development on the subject site.

1.4 NATURE AND EXACTNESS OF SOIL AND ROCK DESCRIPTIONS

Classification and identification of soils and rocks are based upon commonly accepted systems and methods employed in professional geotechnical practice. This report contains descriptions of the systems and methods used. Where deviations from the system or method prevail, they are specifically mentioned.

Classification and identification of geological units are judgmental in nature as to both type and condition. TETRA TECH does not warrant conditions represented herein as exact, but infers accuracy only to the extent that is common in practice.

Where subsurface conditions encountered during development are different from those described in this report, qualified geotechnical personnel should revisit the site and review recommendations in light of the actual conditions encountered.

1.5 LOGS OF TESTHOLES

The testhole logs are a compilation of conditions and classification of soils and rocks as obtained from field observations and laboratory testing of selected samples. Soil and rock zones have been interpreted. Change from one geological zone to the other, indicated on the logs as a distinct line, can be, in fact, transitional. The extent of transition is interpretive. Any circumstance which requires precise definition of soil or rock zone transition elevations may require further investigation and review.

1.6 STRATIGRAPHIC AND GEOLOGICAL INFORMATION

The stratigraphic and geological information indicated on drawings contained in this report are inferred from logs of test holes and/or soil/rock exposures. Stratigraphy is known only at the locations of the test hole or exposure. Actual geology and stratigraphy between test holes and/or exposures may vary from that shown on these drawings. Natural variations in geological conditions are inherent and are a function of the historic environment. TETRA TECH does not represent the conditions illustrated as exact but recognizes that variations will exist. Where knowledge of more precise locations of geological units is necessary, additional investigation and review may be necessary.

1.7 PROTECTION OF EXPOSED GROUND

Excavation and construction operations expose geological materials to climatic elements (freeze/thaw, wet/dry) and/or mechanical disturbance which can cause severe deterioration. Unless otherwise specifically indicated in this report, the walls and floors of excavations must be protected from the elements, particularly moisture, desiccation, frost action and construction traffic.

1.8 SUPPORT OF ADJACENT GROUND AND STRUCTURES

Unless otherwise specifically advised, support of ground and structures adjacent to the anticipated construction and preservation of adjacent ground and structures from the adverse impact of construction activity is required.

1.9 INFLUENCE OF CONSTRUCTION ACTIVITY

There is a direct correlation between construction activity and structural performance of adjacent buildings and other installations. The influence of all anticipated construction activities should be considered by the contractor, owner, architect and prime engineer in consultation with a geotechnical engineer when the final design and construction techniques are known.

1.10 OBSERVATIONS DURING CONSTRUCTION

Because of the nature of geological deposits, the judgmental nature of geotechnical engineering, as well as the potential of adverse circumstances arising from construction activity, observations during site preparation, excavation and construction should be carried out by a geotechnical engineer. These observations may then serve as the basis for confirmation and/or alteration of geotechnical recommendations or design guidelines presented herein.

1.11 DRAINAGE SYSTEMS

Where temporary or permanent drainage systems are installed within or around a structure, the systems which will be installed must protect the structure from loss of ground due to internal erosion and must be designed so as to assure continued performance of the drains. Specific design detail of such systems should be developed or reviewed by the geotechnical engineer. Unless otherwise specified, it is a condition of this report that effective temporary and permanent drainage systems are required and that they must be considered in relation to project purpose and function.

1.12 BEARING CAPACITY

Design bearing capacities, loads and allowable stresses quoted in this report relate to a specific soil or rock type and condition. Construction activity and environmental circumstances can materially change the condition of soil or rock. The elevation at which a soil or rock type occurs is variable. It is a requirement of this report that structural elements be founded in and/or upon geological materials of the type and in the condition assumed. Sufficient observations should be made by qualified geotechnical personnel during construction to assure that the soil and/or rock conditions assumed in this report in fact exist at the site.

1.13 SAMPLES

TETRA TECH will retain all soil and rock samples for 30 days after this report is issued. Further storage or transfer of samples can be made at the Client's expense upon written request, otherwise samples will be discarded.

1.14 INFORMATION PROVIDED TO TETRA TECH BY OTHERS

During the performance of the work and the preparation of the report, TETRA TECH may rely on information provided by persons other than the Client. While TETRA TECH endeavours to verify the accuracy of such information when instructed to do so by the Client, TETRA TECH accepts no responsibility for the accuracy or the reliability of such information which may affect the report.

APPENDIX B

BOREHOLE LOGS AND LABORATORY TEST RESULTS

TERMS USED ON BOREHOLE LOGS

TERMS DESCRIBING CONSISTENCY OR CONDITION

COARSE GRAINED SOILS (major portion retained on 0.075mm sieve): Includes (1) clean gravels and sands, and (2) silty or clayey gravels and sands. Condition is rated according to relative density, as inferred from laboratory or in situ tests.

DESCRIPTIVE TERM	RELATIVE DENSITY	N (blows per 0.3m)
Very Loose	0 TO 20%	0 to 4
Loose	20 TO 40%	4 to 10
Compact	40 TO 75%	10 to 30
Dense	75 TO 90%	30 to 50
Very Dense	90 TO 100%	greater than 50

The number of blows, N, on a 51mm O.D. split spoon sampler of a 63.5kg weight falling 0.76m, required to drive the sampler a distance of 0.3m from 0.15m to 0.45m.

FINE GRAINED SOILS (major portion passing 0.075mm sieve): Includes (1) inorganic and organic silts and clays, (2) gravelly, sandy, or silty clays, and (3) clayey silts. Consistency is rated according to shearing strength, as estimated from laboratory or in situ tests.

DESCRIPTIVE TERM	UNCONFINED COMPRESSIVE STRENGTH (KPA)
Very Soft	Less than 25
Soft	25 to 50
Firm	50 to 100
Stiff	100 to 200
Very Stiff	200 to 400
Hard	Greater than 400

NOTE: Slickensided and fissured clays may have lower unconfined compressive strengths than shown above, because of planes of weakness or cracks in the soil.

GENERAL DESCRIPTIVE TERMS

Slickensided - having inclined planes of weakness that are slick and glossy in appearance.

Fissured - containing shrinkage cracks, frequently filled with fine sand or silt; usually more or less vertical.

Laminated - composed of thin layers of varying colour and texture.

Interbedded - composed of alternate layers of different soil types.

Calcareous - containing appreciable quantities of calcium carbonate.;

Well graded - having wide range in grain sizes and substantial amounts of intermediate particle sizes.

Poorly graded - predominantly of one grain size, or having a range of sizes with some intermediate size missing.

MODIFIED UNIFIED SOIL CLASSIFICATION

MAJOR DIVISION		GROUP SYMBOL	TYPICAL DESCRIPTION	LABORATORY CLASSIFICATION CRITERIA				
COARSE - GRAINED SOILS More than 50% retained on No. 75 µm sieve*	GRAVELS 50% or more of coarse fraction retained on No. 4 sieve	CLEAN GRAVELS	GW	Well-graded gravels and gravel-sand mixtures, little or no fines	Classification on basis of percentage of fines GW, GP, SW, SP GM, GC, SM, SC Borderline classification requiring use of dual symbols	$C_u = \frac{D_{60}}{D_{10}}$ Greater than 4 $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ Between 1 and 3		
			GP	Poorly-graded gravels and gravel-sand mixtures, little or no fines		Not meeting both criteria for GW		
		GRAVELS WITH FINES	GM	Silty gravels, gravel-sand-silt mixtures		Atterberg limits plot below 'A' line or plasticity index less than 4	Atterberg limits plotting in hatched area are borderline classifications requiring use of dual symbols	
			GC	Clayey gravels, gravel-sand-clay mixtures		Atterberg limits plot above 'A' line and plasticity index greater than 7		
	SANDS More than 50% of coarse fraction passes No. 4 sieve	CLEAN SANDS	SW	Well-graded sands and gravelly sands, little or no fines	Classification on basis of percentage of fines Less than 5% pass 75 µm sieve More than 12% pass 75 µm sieve 5% to 12% pass 75 µm sieve	$C_u = \frac{D_{60}}{D_{10}}$ Greater than 6 $C_c = \frac{(D_{30})^2}{D_{10} \times D_{60}}$ Between 1 and 3		
			SP	Poorly-graded sands and gravelly sands, little or no fines		Not meeting both criteria for SW		
		SANDS WITH FINES	SM	Silty sands, sand-silt mixtures		Atterberg limits plot above 'A' line and plasticity index less than 4	Atterberg limits plotting in hatched area are borderline classifications requiring use of dual symbols	
			SC	Clayey sands, sand-clay mixtures		Atterberg limits plot above 'A' line and plasticity index greater than 7		
		FINE-GRAINED SOILS (by behavior) 50% or more passes 75 µm sieve*	SILTS Liquid limit	ML		Inorganic silts, very fine sands, rock flour, silty or clayey fine sands of slight plasticity	PLASTICITY CHART For classification of fine-grained soils and fine fraction of coarse-grained soils Equation of 'A' line: $PI = 0.73(LL-20)$	
				MH		Inorganic silts, micaceous or diatomaceous fine sands or silts, elastic silts		
CLAYS Above 'A' line on plasticity chart negligible organic content Liquid limit	CL		Inorganic clays of low plasticity, gravelly clays, sandy clays, silty clays, lean clays					
	CI		Inorganic clay of medium plasticity, silty clays					
	CH		Inorganic clay of high plasticity, fat clays					
ORGANIC SILTS AND CLAYS Liquid limit	OL		Organic silts and organic silty clays of low plasticity					
	OH		Organic clays of medium to high plasticity					
HIGHLY ORGANIC SOILS			PT	Peat, muck and other highly organic soils				

* Based on the material passing the 75 mm sieve

† ASTM Designation D 2487, for identification procedure see D 2488 USC as modified by PFRA

GROUND ICE DESCRIPTION

ICE NOT VISIBLE

GROUP SYMBOL	SYMBOL	SUBGROUP DESCRIPTION	
N	Nf	Poorly-bonded or friable	
	Nbn	No excess ice, well-bonded	
	Nbe	Excess ice, well-bonded	

NOTES:

- Dual symbols are used to indicate borderline or mixed ice classifications.
- Visual estimates of ice contents indicated on borehole logs ± 5%
- This system of ground ice description has been modified from NRC Technical Memo 79, Guide to the Field Description of Permafrost for Engineering Purposes.

LEGEND: Soil Ice

VISIBLE ICE LESS THAN 50% BY VOLUME

GROUP SYMBOL	SYMBOL	SUBGROUP DESCRIPTION	
V	Vx	Individual ice crystals or inclusions	
	Vc	Ice coatings on particles	
	Vr	Random or irregularly oriented ice formations	
	Vs	Stratified or distinctly oriented ice formations	

VISIBLE ICE GREATER THAN 50% BY VOLUME

ICE	ICE + Soil Type	SUBGROUP DESCRIPTION	
		Ice with soil inclusions	
		Ice without soil inclusions (greater than 25 mm thick)	

Yukon Government

Borehole No: BH16-02

Project: Dawson City Undergruond Utilities

Project No: W14103567-21

Location: Craig St. High Tower

Dawson City, YT

UTM: 576396 E; 7103833 N; Z 7

Depth (m)	Method	Soil Description	Ground Ice Description	Sample Type	Sample Number	Moisture Content (%)	Plastic Limit	Moisture Content	Liquid Limit	Depth (ft)
0							20	40	60	0
0 - 4.1	Solid stem auger	<p>SAND (FILL) - silty, trace gravel, poorly graded, frozen, loose, light brown, organic inclusions,</p> <p>- dry</p> <p>- trace cobbles, inclusions of glass and metal garbage</p> <p>- possible weathered and fractured bedrock, no visible inclusions</p>	<p>Seasonally Frozen</p> <p>Unfrozen</p>		SA07 SA08 SA09 SA10	6.8 12.3 5.1 1.9				0 1 2 3 4 5 6 7 8 9 10 11 12 13
4.1 - 10		END of BOREHOLE at 4.1 m (Auger Refusal).								14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32



Contractor: Donjeck Drilling

Completion Depth: 4 m

Drilling Rig Type: Truck Mounted CME75

Start Date: 2016 November 3

Logged By: TM

Completion Date: 2016 November 3

Reviewed By:

Page 1 of 1

Depth (m)	Method	Soil Description	Ground Ice Description	Sample Type	Sample Number	Moisture Content (%)	Plastic Limit	Moisture Content	Liquid Limit	Depth (ft)
0			Seasonally Frozen				20	40	80	0
0.5	Solid stem auger	SAND and GRAVEL (FILL) - some silt, well graded, frozen, compact, greyish brown	Unfrozen		SA11	11.1				1
1.0		- dry			SA12	22.8				2
1.5		ORGANIC SILT - some sand, trace gravel, damp, firm, dark brown, fibrous organic inclusions			SA13	39				3
2.0		SILT - trace sand, moist, firm, dark grey, fibrous organic inclusions			SA14	6.3				4
2.5		SAND - some silt, poorly graded, dry, loose, grey			SA15	18.7				5
3.0		- some silt, damp, compact			SA16	15.1				6
3.5		GRAVEL and SAND - trace silt, well graded, rounded, moist								7
4.0										8
4.5										9
5.0										10
5.5										11
6.0										12
6.1		END of BOREHOLE at 6.1 m (Target Depth).								13
6.5		Possible water table around 5.3 m, hole sloughed to 4.2 m before water could be confirmed.								14
7.0										15
8.0										16
9.0										17
10.0										18



Contractor: Donjeck Drilling

Completion Depth: 6.1 m

Drilling Rig Type: Truck Mounted CME75

Start Date: 2016 November 3

Logged By: TM

Completion Date: 2016 November 3


Reviewed By:

Page 1 of 1

PARTICLE SIZE ANALYSIS REPORT

ASTM D422, C136 & C117

Project:	Underground Utilities - Geotech.	Sample No.:	SA14
Project No.:	W14103567-21	Material Type:	
Site:	Dawson City, YT	Sample Loc.:	BH16-03
Client:	YG - Community Services	Sample Depth:	2.7 m
Client Rep.:	Elise Bingeman	Sampling Method:	Grab
Date Tested:	December 8, 2016	By:	AMT
		Date sampled:	November 3, 2016
Soil Description ² :	SAND - some silt	Sampled By:	TM
		USC Classification:	Cu: #N/A
Moisture Content:	6.3%		Cc: #N/A

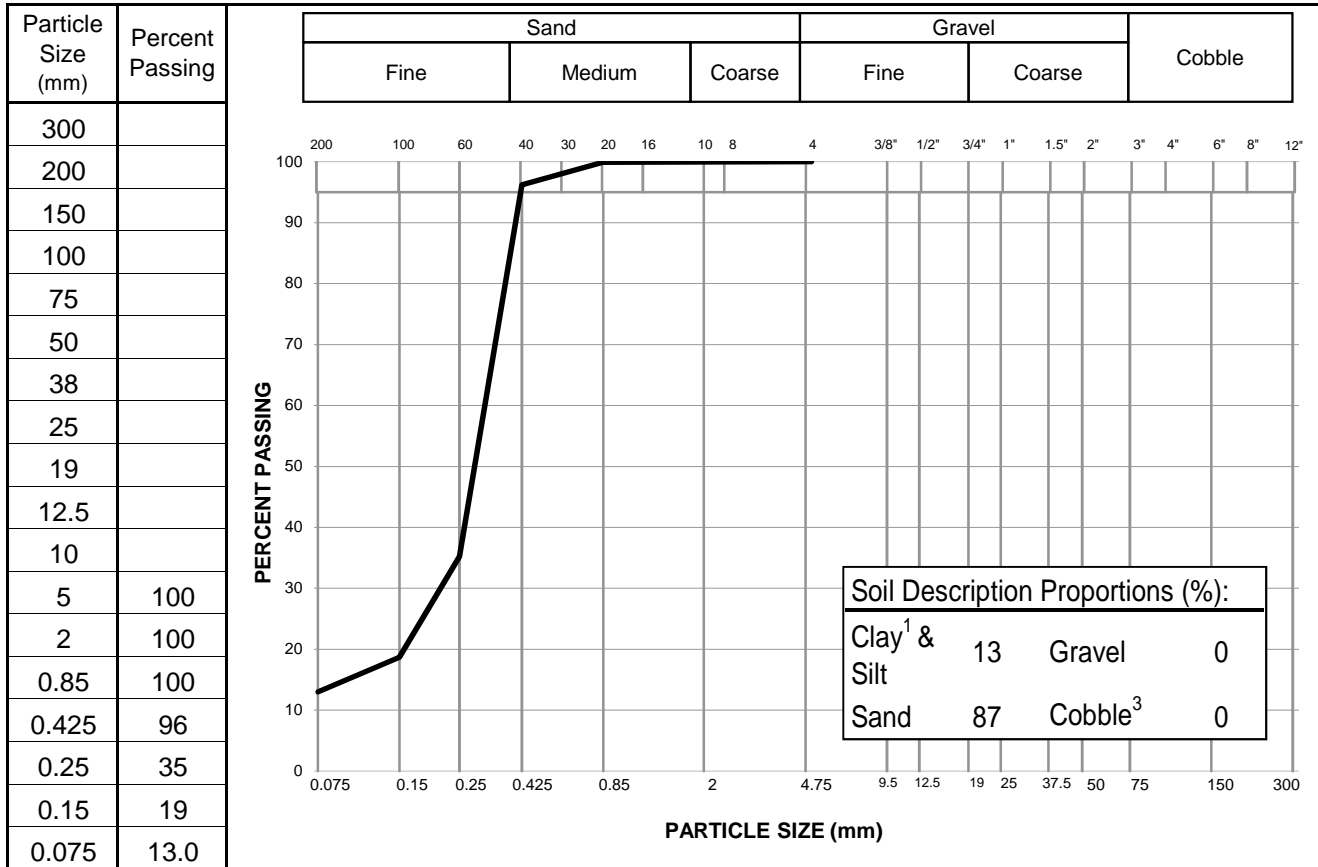

Notes: ¹ The upper clay size of 2 um, per the Canadian Foundation Engineering Manual
² The description is visually based & subject to EBA description protocols
³ If cobbles are present, sampling procedure may not meet ASTM C702 & D75

Specification: _____

Remarks: _____

Reviewed By: *Chad Caon* P.Eng.

Data presented hereon is for the sole use of the stipulated client. Tetra Tech EBA is not responsible, nor can be held liable, for use made of this report by any other party, with or without the knowledge of Tetra Tech EBA. The testing services reported herein have been performed to recognized industry standards, unless noted. No other warranty is made. These data do not include or represent any interpretation or opinion of specification compliance or material suitability. Should engineering interpretation be required, Tetra Tech EBA will provide it upon written request.



Depth (m)	Method	Soil Description	Ground Ice Description	Sample Type	Sample Number	Moisture Content (%)	Plastic Limit	Moisture Content	Liquid Limit	Depth (ft)
0							20	40	80	0
0 - 1	Solid stem auger	SAND and GRAVEL (FILL) - some silt, well graded, frozen, compact, light greyish brown	Seasonally Frozen		SA17	5.1				1
1 - 2		SAND and GRAVEL- some silt, trace cobbles, well graded, damp, compact, dark brownish grey	Unfrozen		SA18	10.4				2
2 - 3		- no visible gravel, no visible cobbles, poorly graded, dry, loose			SA19	9.4				3
3 - 4		SILT - trace sand, moist, firm, dark greyish brown			SA20	33.8				4
4 - 5		GRAVEL and SAND - some silt, trace cobbles, well graded, damp, compact, dark greyish brown			SA21	5.2				5
5 - 6		- trace silt, well graded, dry			SA22	3.4				6
6 - 10		- wet							7	
6		END of BOREHOLE at 6.1 m (Target Depth).								20



Contractor: Donjeck Drilling

Completion Depth: 6.1 m

Drilling Rig Type: Truck Mounted CME75

Start Date: 2016 November 3

Logged By: TM

Completion Date: 2016 November 3


Reviewed By:

Page 1 of 1

PARTICLE SIZE ANALYSIS REPORT

ASTM D422, C136 & C117

Project:	Underground Utilities - Geotech.	Sample No.:	SA18
Project No.:	W14103567-21	Material Type:	
Site:	Dawson City, YT	Sample Loc.:	BH16-04
Client:	YG - Community Services	Sample Depth:	1.2 m
Client Rep.:	Elise Bingeman	Sampling Method:	Grab
Date Tested:	December 8, 2016	By:	AMT
Date Tested:	December 8, 2016	Date sampled:	November 3, 2016
Soil Description ² :	SAND and GRAVEL - some silt	Sampled By:	TM
		USC Classification:	Cu: #N/A
Moisture Content:	10.4%		Cc: #N/A

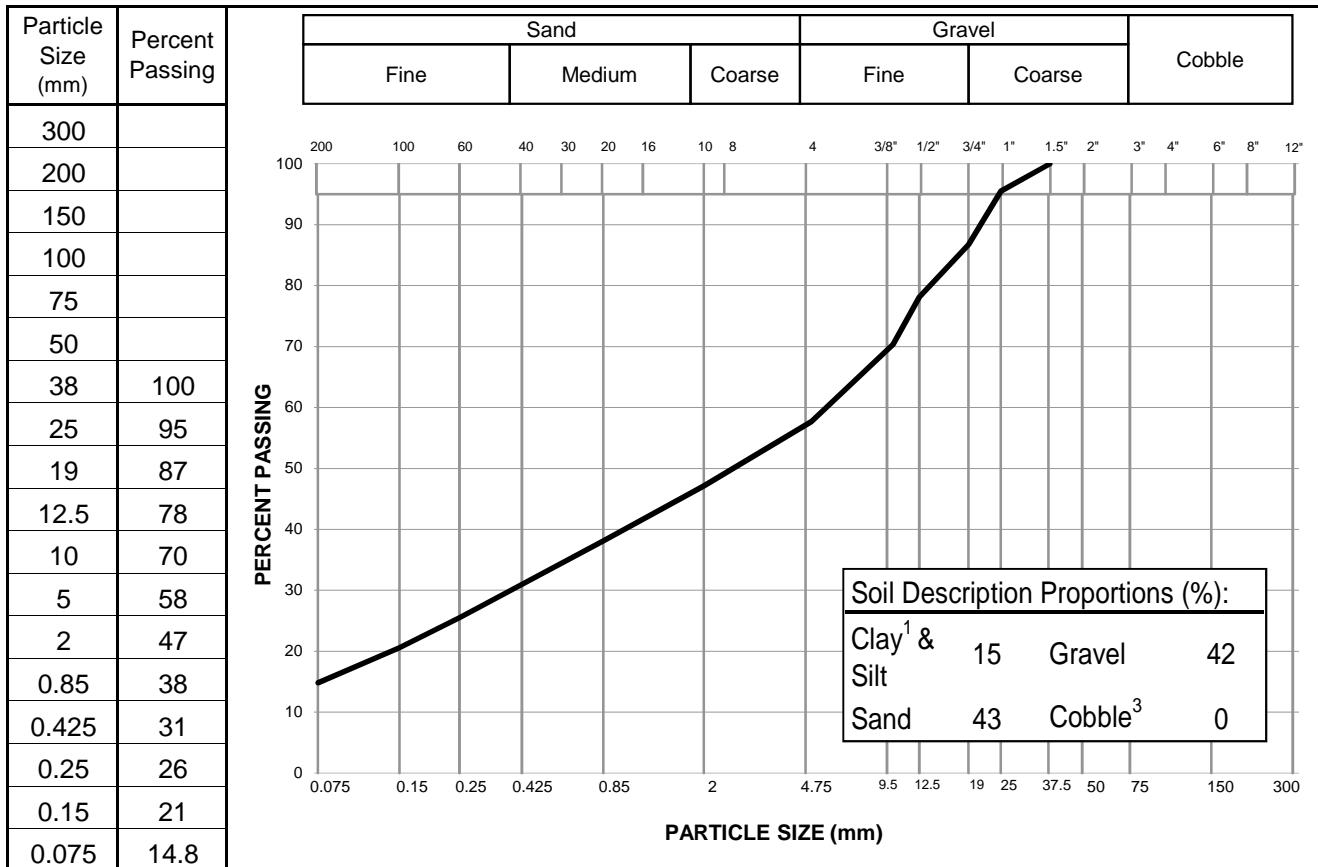

Notes: ¹ The upper clay size of 2 um, per the Canadian Foundation Engineering Manual
² The description is visually based & subject to EBA description protocols
³ If cobbles are present, sampling procedure may not meet ASTM C702 & D75

Specification: _____

Remarks: _____

Reviewed By: *Chad Coor* P.Eng.

Depth (m)	Method	Soil Description	Ground Ice Description	Sample Type	Sample Number	Moisture Content (%)	Plastic Limit	Moisture Content	Liquid Limit	Depth (ft)
0										0
0 - 1	Solid stem auger	SAND and GRAVEL (FILL) - some silt, well graded, frozen, compact, light greyish brown	Seasonally Frozen							1
0 - 1		SAND - gravelly, silty, poorly graded, frozen, loose, light brown								2
1 - 2		- dry, compact	Unfrozen	SA32	7.4	●				3
2 - 3										4
3 - 4		- possible cobbles and boulders								5
4 - 5		- loose, light greyish brown								6
5 - 6		- light grey								7
6		END of BOREHOLE at 6.1 m (Target Depth).								8
7										9
8										10
9										11
10										12
										13
										14
										15
										16
										17
										18
										19
										20
										21
										22
										23
										24
										25
										26
										27
										28
										29
										30
										31
										32



Contractor: Donjeck Drilling

Completion Depth: 6.1 m

Drilling Rig Type: Truck Mounted CME75

Start Date: 2016 November 4

Logged By: TM

Completion Date: 2016 November 4


Reviewed By:

Page 1 of 1

PARTICLE SIZE ANALYSIS REPORT

ASTM D422, C136 & C117

Project:	Underground Utilities - Geotech.	Sample No.:	SA33
Project No.:	W14103567-21	Material Type:	
Site:	Dawson City, YT	Sample Loc.:	BH16-07
Client:	YG - Community Services	Sample Depth:	2.1 m
Client Rep.:	Elise Bingeman	Sampling Method:	Grab
Date Tested:	December 8, 2016	By:	AMT
		Date sampled:	November 4, 2016
Soil Description ² :	SAND - gravelly, silty	Sampled By:	TM
		USC Classification:	Cu: #N/A
Moisture Content:	18.1%		Cc: #N/A

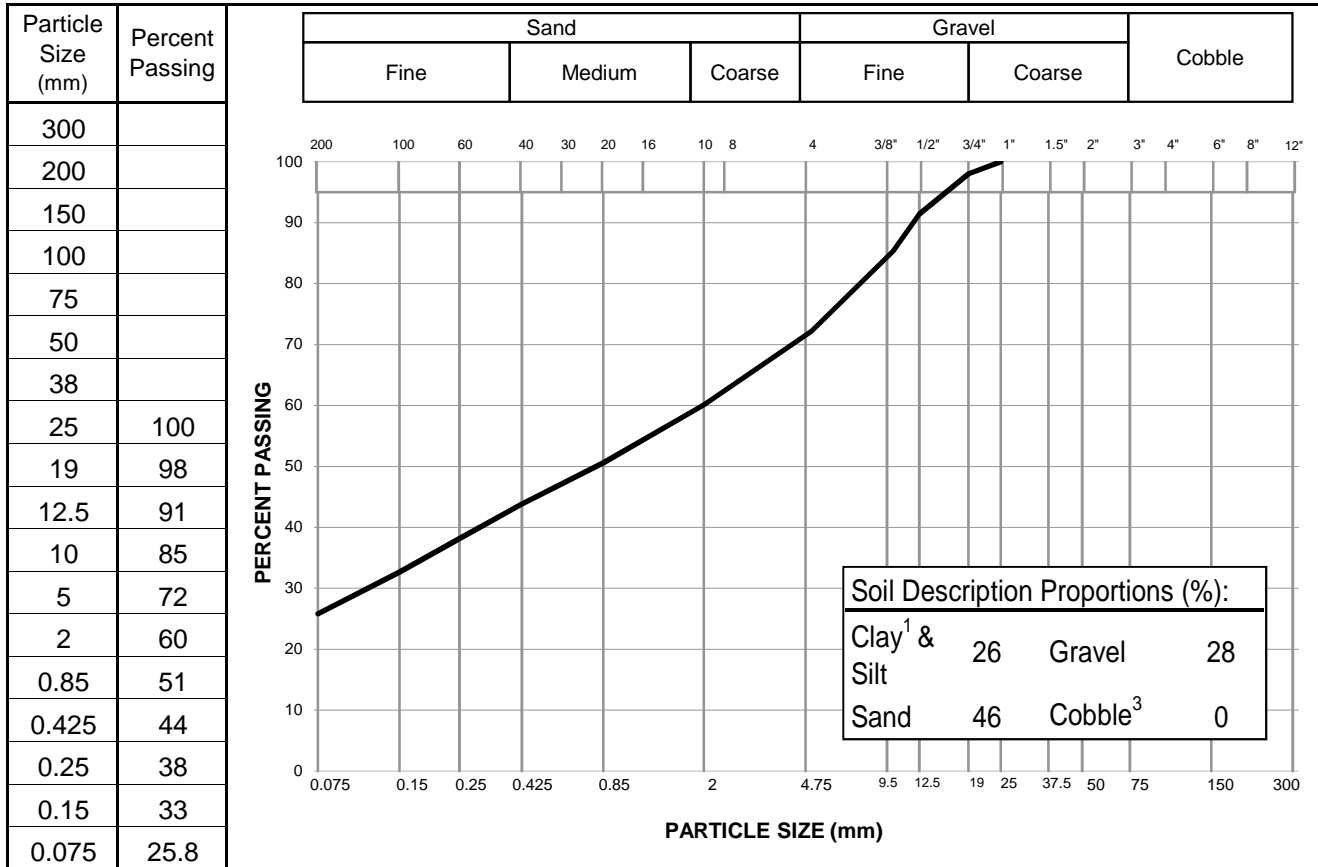

Notes: ¹ The upper clay size of 2 um, per the Canadian Foundation Engineering Manual
² The description is visually based & subject to EBA description protocols
³ If cobbles are present, sampling procedure may not meet ASTM C702 & D75

Specification: _____

Remarks: 33.3 grams wood and organic material removed during sieve, was not included in soil weights.

Reviewed By: *Chad Coon* P.Eng.