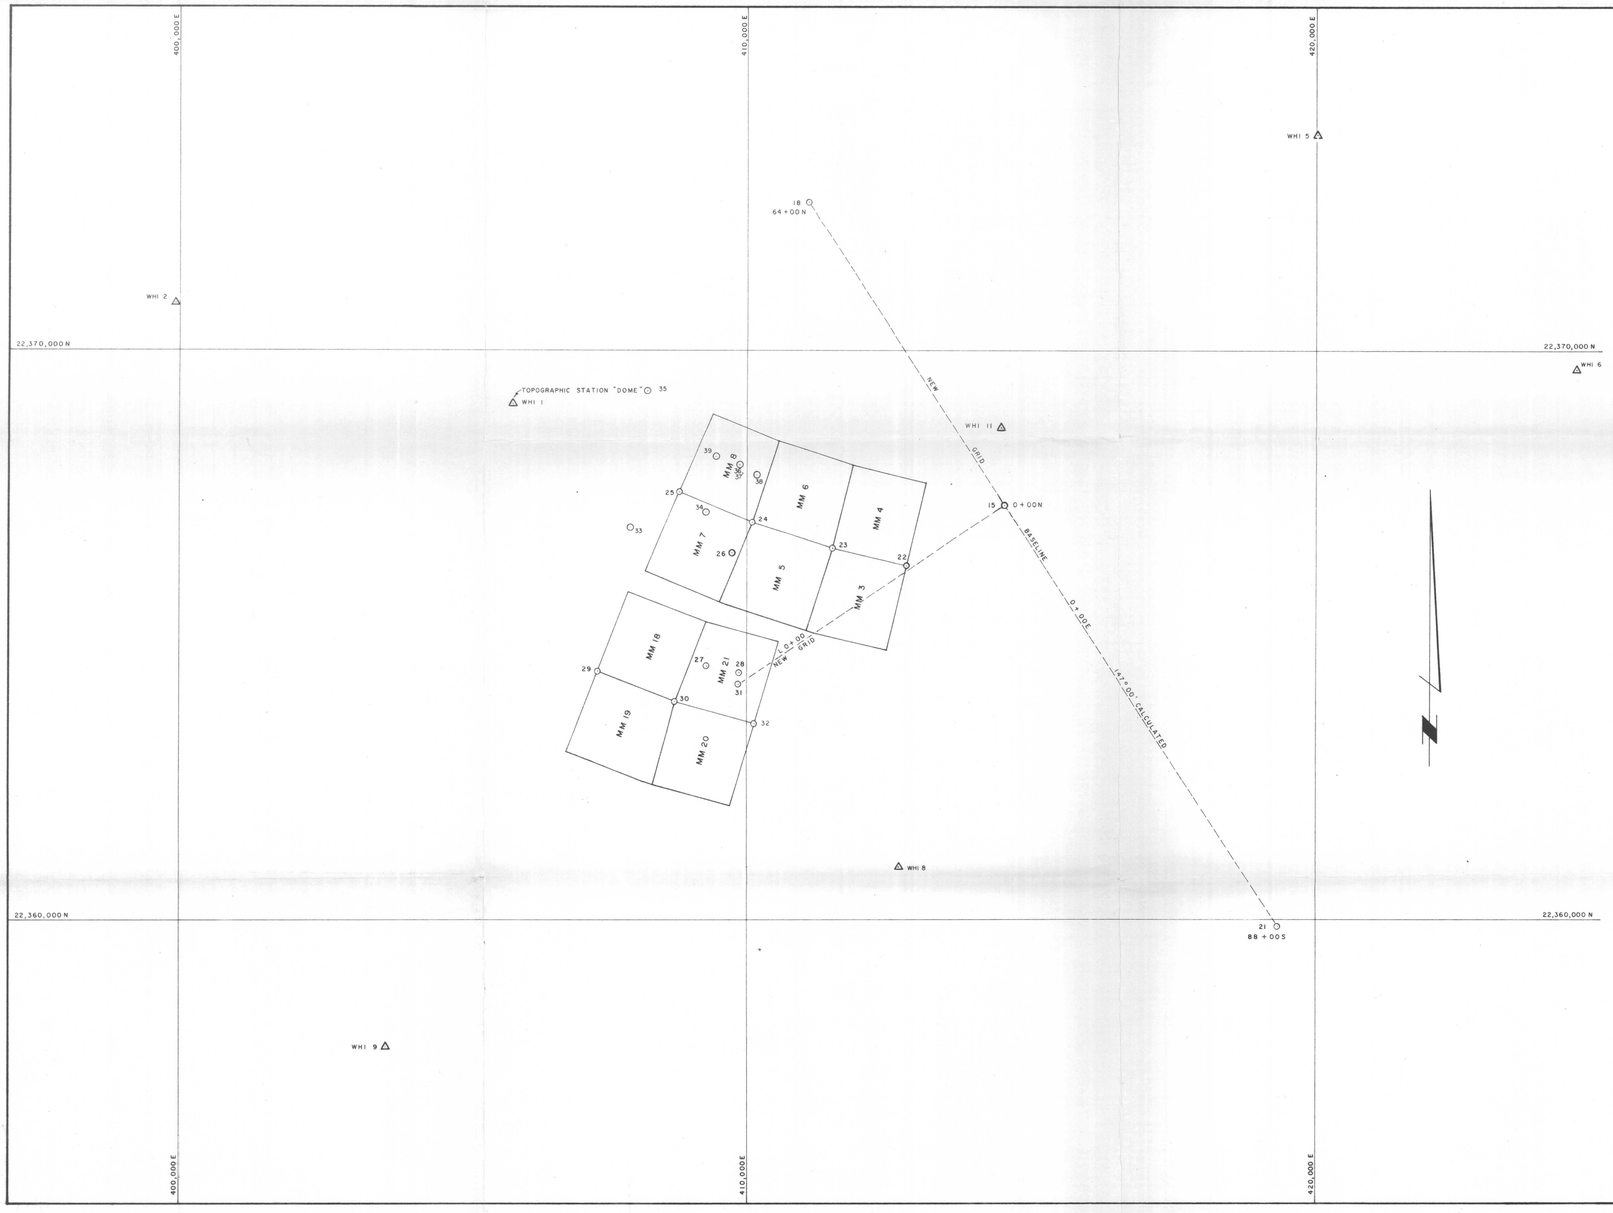

PLAN SHOWING MINERAL CLAIMS, GEOPHYSICAL GRIDS AND DRILLHOLES FOR

ANVIL MINING CORPORATION LTD.

MM CLAIM PROJECT

61° 27' LATITUDE ; 132° 40' LONGITUDE (APPROX.)

MAP SHEET 105 F - 7

YUKON TERRITORY

AUGUST, 1974

SCALE 1" = 1000'



LEGEND :

△ INDICATES CONTROL STATIONS WITH STATION NUMBER.

⊙ INDICATES SURVEY TIE POINT WITH STATION NUMBER.

COORDINATE TABLE

Stations	Northings	Eastings	Elevations	
WHI 5	22,373,785.8	420,041.6	3559.1	CONTROL STATION
WHI 9	22,357,842.1	403,632.9	3476.9	CONTROL STATION
WHI 11	22,368,575.3	414,471.3	5655.7	CONTROL STATION
WHI 1	22,369,062.2	405,880.7	6560.0	CONTROL STATION
15	22,367,272.0	414,528.7	5583.3	0+00 N NEW B/L
18	22,372,584.9	411,074.4	5806.4	64+00N NEW B/L
21	22,359,872.3	419,326.6	4898.5	88+00S NEW B/L
22	22,366,201.7	412,819.9	5212.4	CLAIM POSTS 0+00 OLD B/L
23	22,366,513.5	411,504.3	5827.7	CLAIM POSTS
24	22,366,980.5	410,106.7	6001.7	CLAIM POSTS
25	22,367,527.1	408,834.6	6128.8	CLAIM POSTS
26	22,366,439.2	409,744.9	5688.1	DDH 73 MM-1
27	22,364,471.1	409,294.6	5071.3	DDH 73 MM-2
28	22,364,353.8	409,868.9	4875.9	36+00S OLD B/L
29	22,364,387.8	407,385.4	5146.1	CLAIM POSTS
30	22,363,843.8	408,740.3	4986.5	CLAIM POSTS
31	22,364,155.1	409,863.4	4931.8	L0+00, 60+00W NEW GRID
32	22,363,453.3	410,133.4	4695.4	CLAIM POSTS
33	22,366,875.7	407,962.2	5677.0	DDH 74 MM-1
34	22,367,164.3	409,283.8	6100.6	DDH 74 MM-2
35	22,369,270.7	408,257.2	5325.4	DDH 76 MM-1
36	22,367,974.2	409,897.7	5534.1	DDH 76 MM-2
37	22,367,971.7	409,897.9	5534.1	DDH 76 MM-3
38	22,367,800.6	410,183.6	5585.4	DDH 76 MM-4, DDH 76 MM-5
39	22,368,106.7	409,456.4	5800.3	DDH 76 MM-6
WHI 2	22,370,806.4	399,915.7	6113.1	CONTROL STATION
WHI 6	22,369,630.5	424,583.6	5325.6	CONTROL STATION
WHI 8	22,360,917.6	412,672.8	5687.5	CONTROL STATION

HOSFORD, IMPEY AND WELTER, LIMITED
Box 4418
Whitehorse, Yukon

967 - 74

015665