LSD.-- K.B. 1490 T.D. 4738

A Riley's REPRODUCTION

CATALOGUE NO.:81746 J-C

PROVINCE YUKON TERRITORY
FIELD or
LOCATION WILDCAT
WELL PAN AM HOME SIGNAL CSP
A-1 KOTANEELEE YT J-50
COMPANY PAN AMERICAN
PETROLEUM CORPORATION

SCHLUMBERGER OF CANADA

CALGARY, ALBERTA

SIMULTANEOUS

Gamma Ray-Neutron

COMPANY PAN AMERICAN
PETROLEUM
CORPORATION

WELL PAN AM HOME SIGNAL CSP
A-1 KOTANEELEE YT P-50

FIELD WILDCAT

LOCATION

PROVINCE YUKON TERRITORY

Other Surveys

Location of Well

UNIT: P

SECTION: 50

GRID: 60° 10'
124° 0'

Elevation: D.F.:
K.B.: 1490
or G.L. 1475.25

FILING No.

Log Depths Measured From K.B. 14.75 Ft. above G.L.

RUN NO.	ONE	
Date	1JUNE62	
First Reading	4737	
Last Reading	100	
Footage Measured	4637	
Max. Depth Reached	4738	
Bottom Driller	4733	
Maximum Temp. °F.	135	
Fluid Nature	GEL CHEM.	
Fluid Level	FULL	
Casing Size	13 3/8 in.	in.
Casing Weight	54.5 lb. 0 to 417	lb. to
Casing Size	in.	in.
Casing Weight	lb. to	lb. to
Bit Size	12 ¼ in. to	in. to
Bit Size	- in. - to -	in. to
Det. No.	NLDE	
Type Equipment	GNTG	
Type Panel.	GNPC	
Opr. Rig Time	8	
Truck No.	DSUA # 7	
Recorded by	HAMILTON	
Witness	BLINN	

FOLD HERE

REMARKS: CALIBRATION	BACKGROUND CPS	TEST SOURCE CPS	GALV. INCREASE DIVISIONS	PANEL SENS. TAP. FOR CAL.
BEFORE GAMMA RAY	95	490	8.25	500
BEFORE NEUTRON	3	410	143	500

SPACING = 19.5"

135 BHT MEASURED 9 HRS. AFTER CIRCULATION

GAMMA RAY A P I UNITS	CASING COLLARS	NEUTRON STANDARD COUNTS/SECOND

INTERVAL: 100 to 4737
Sens. 300 T.C. 2
Logging Speed 20 ft./min.
ZERO 0 div. to left
0 → 120
120 → 240

INTERVAL: 100 to 4737
Sensitivity 300 Time Constant 2
Logging Speed 20 ft./min.
ZERO 3 divisions to left of this line
270 1170 → 2070

SPEED IN FPM

COPYRIGHT OWNED
AND REGISTERED BY
RILEY'S REPRODUCTIONS LTD.
REG. NO. 119619

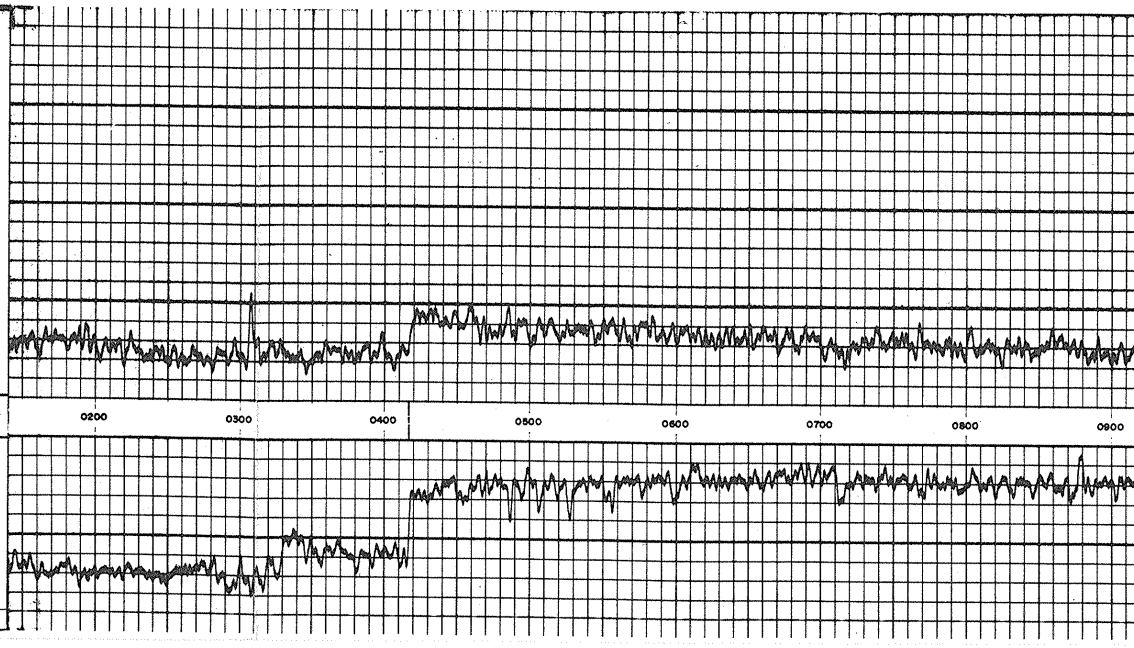

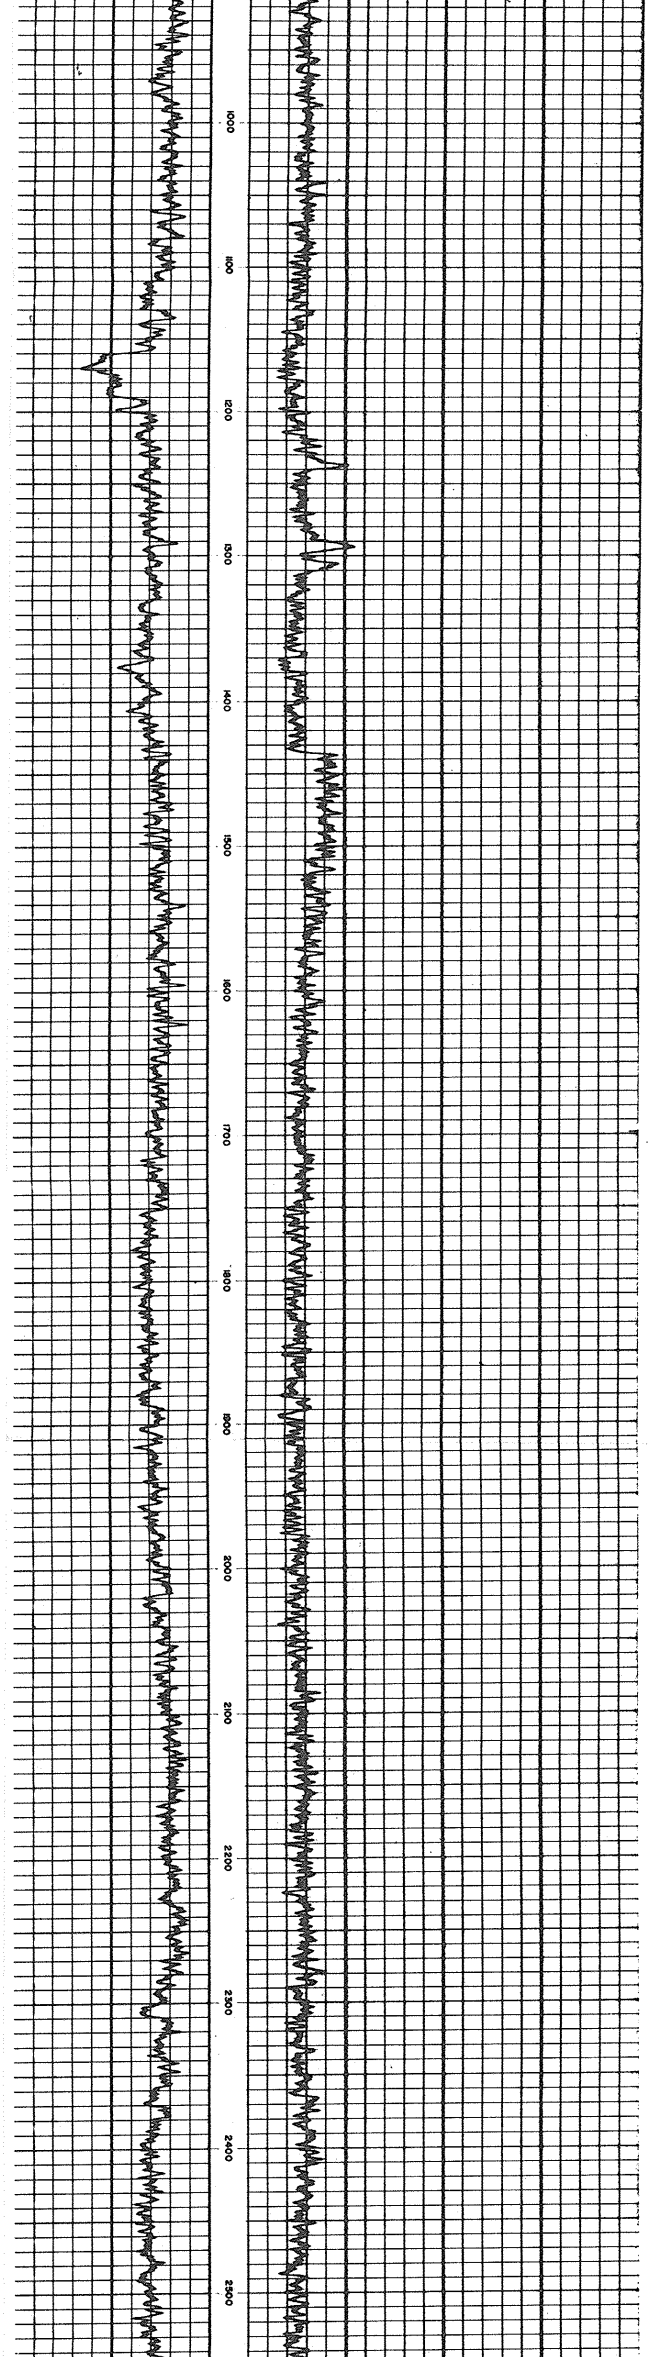

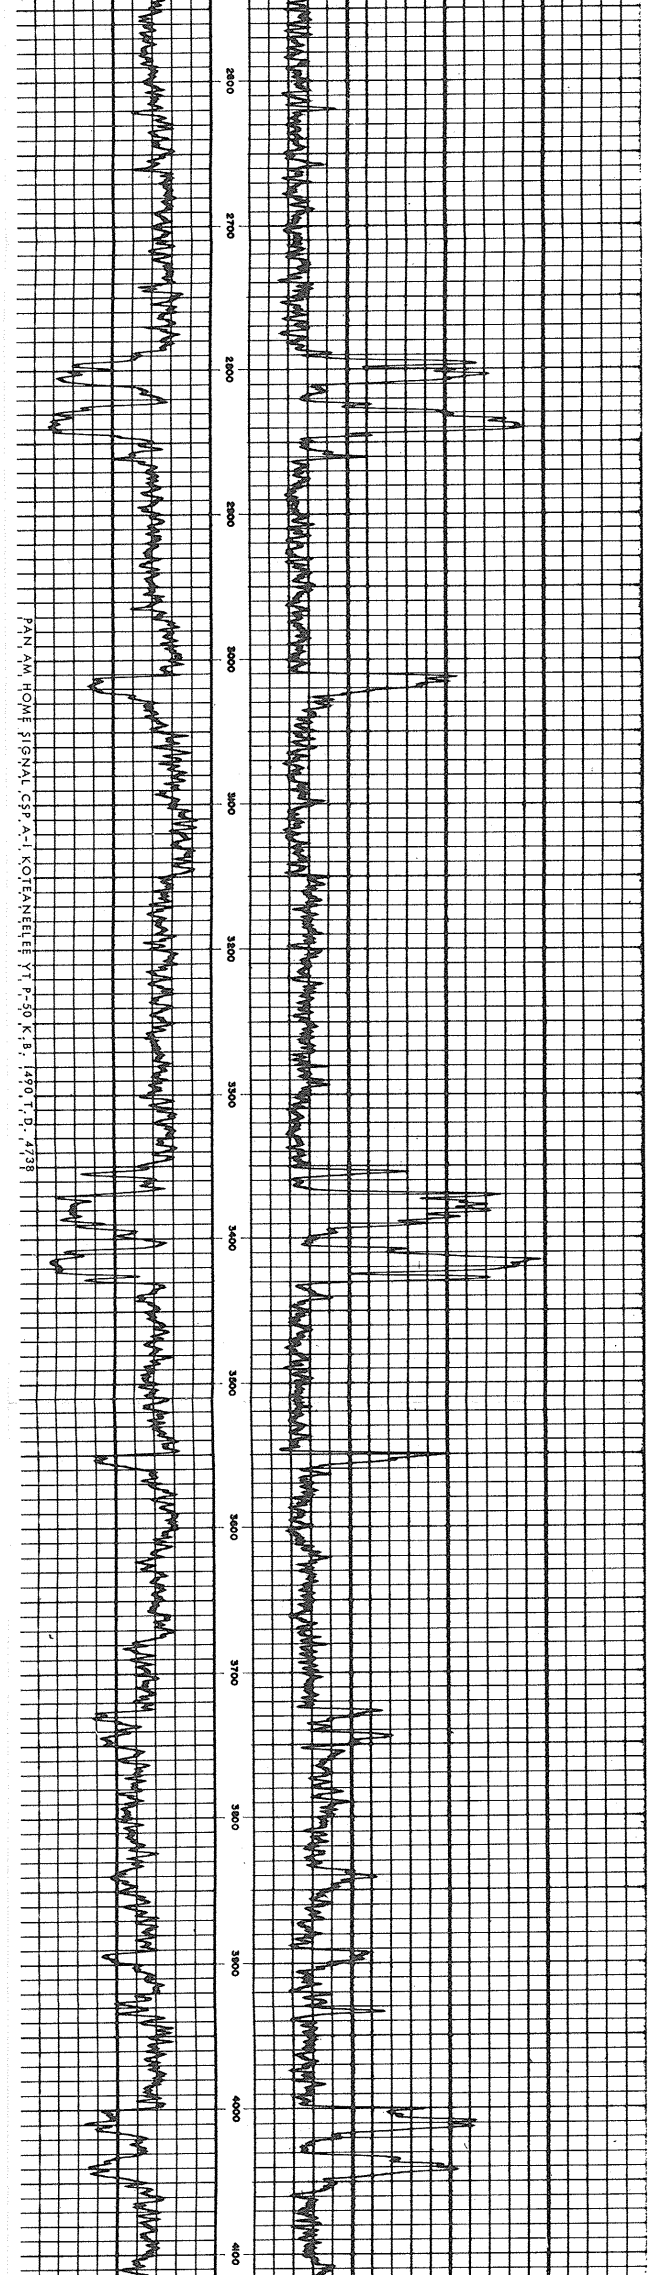

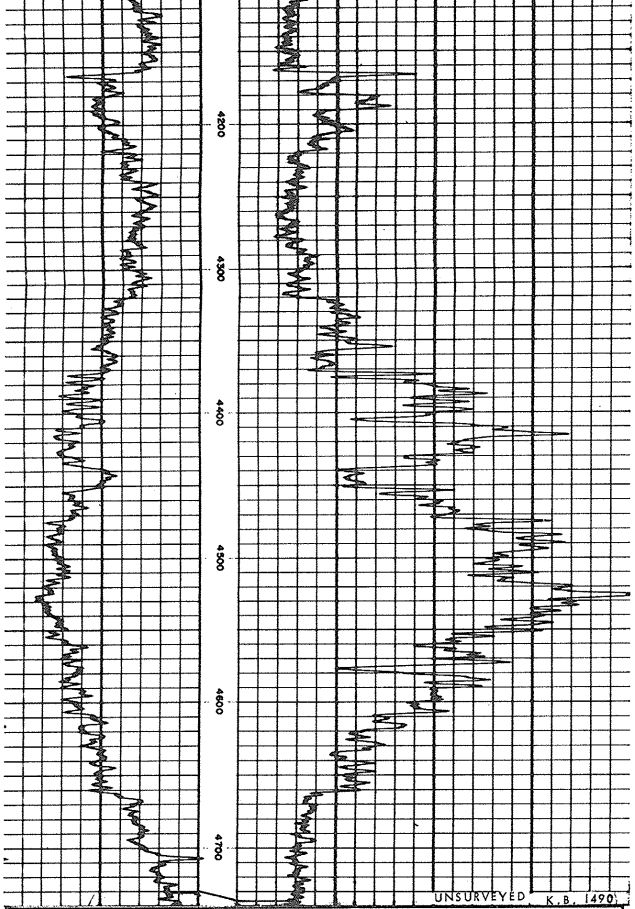

DETAIL LOG

5" = 100'

GAMMA RAY
API UNITS

CASING COLLARS ↓

NEUTRON
STANDARD COUNTS/SECOND

INTERVAL: 100 to 4737
Sens. 300 T.C. 2
Logging Speed 20 ft./min.
ZERO 0 div. to left
0 120
120 → 240

INTERVAL: 100 to 4737
Sensitivity 300 Time Constant 2
Logging Speed 20 ft./min.
ZERO 3 divisions to left of this line
270 11.70 → 2070

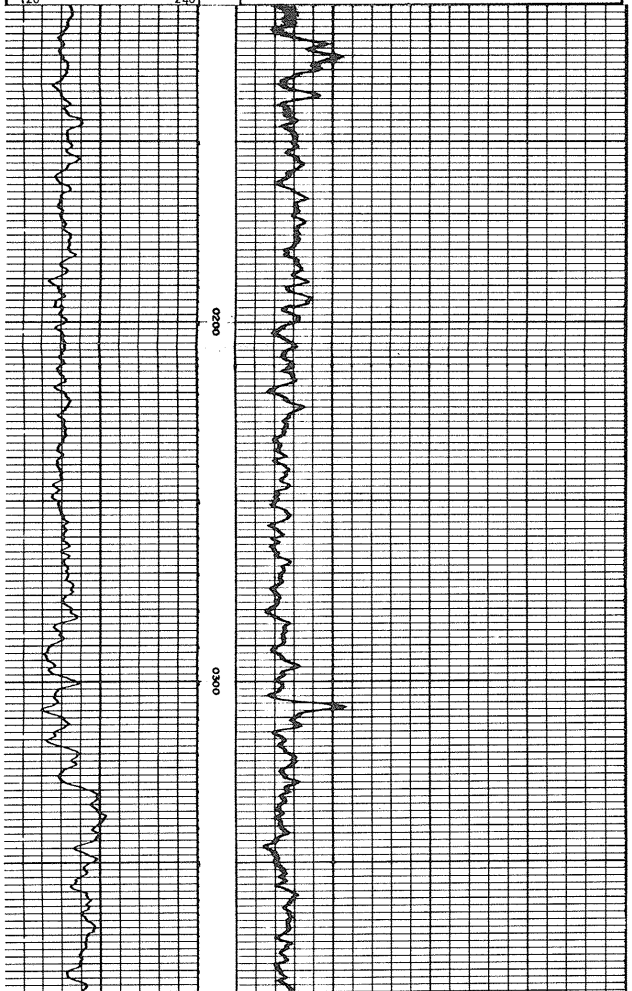

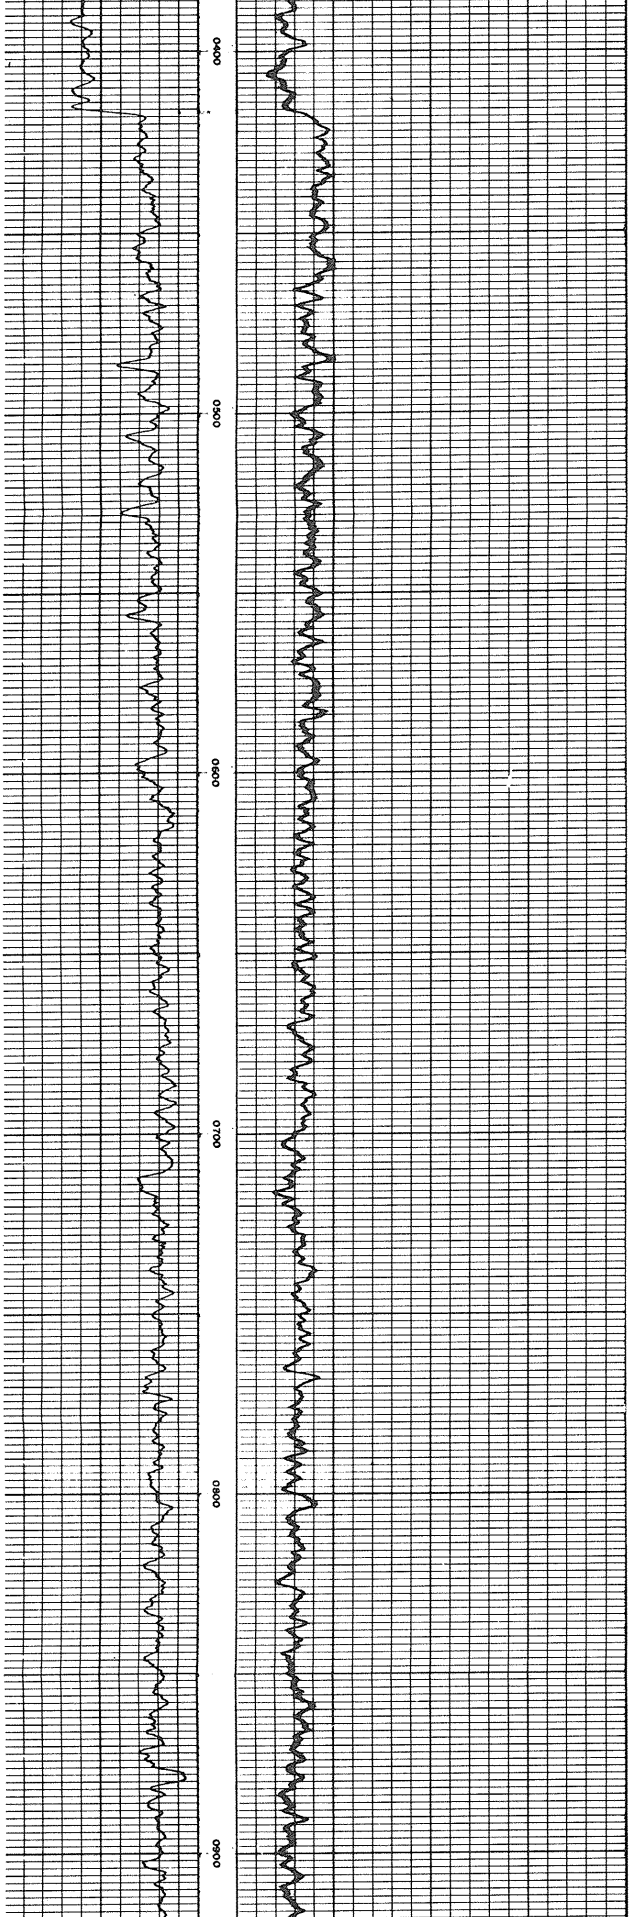

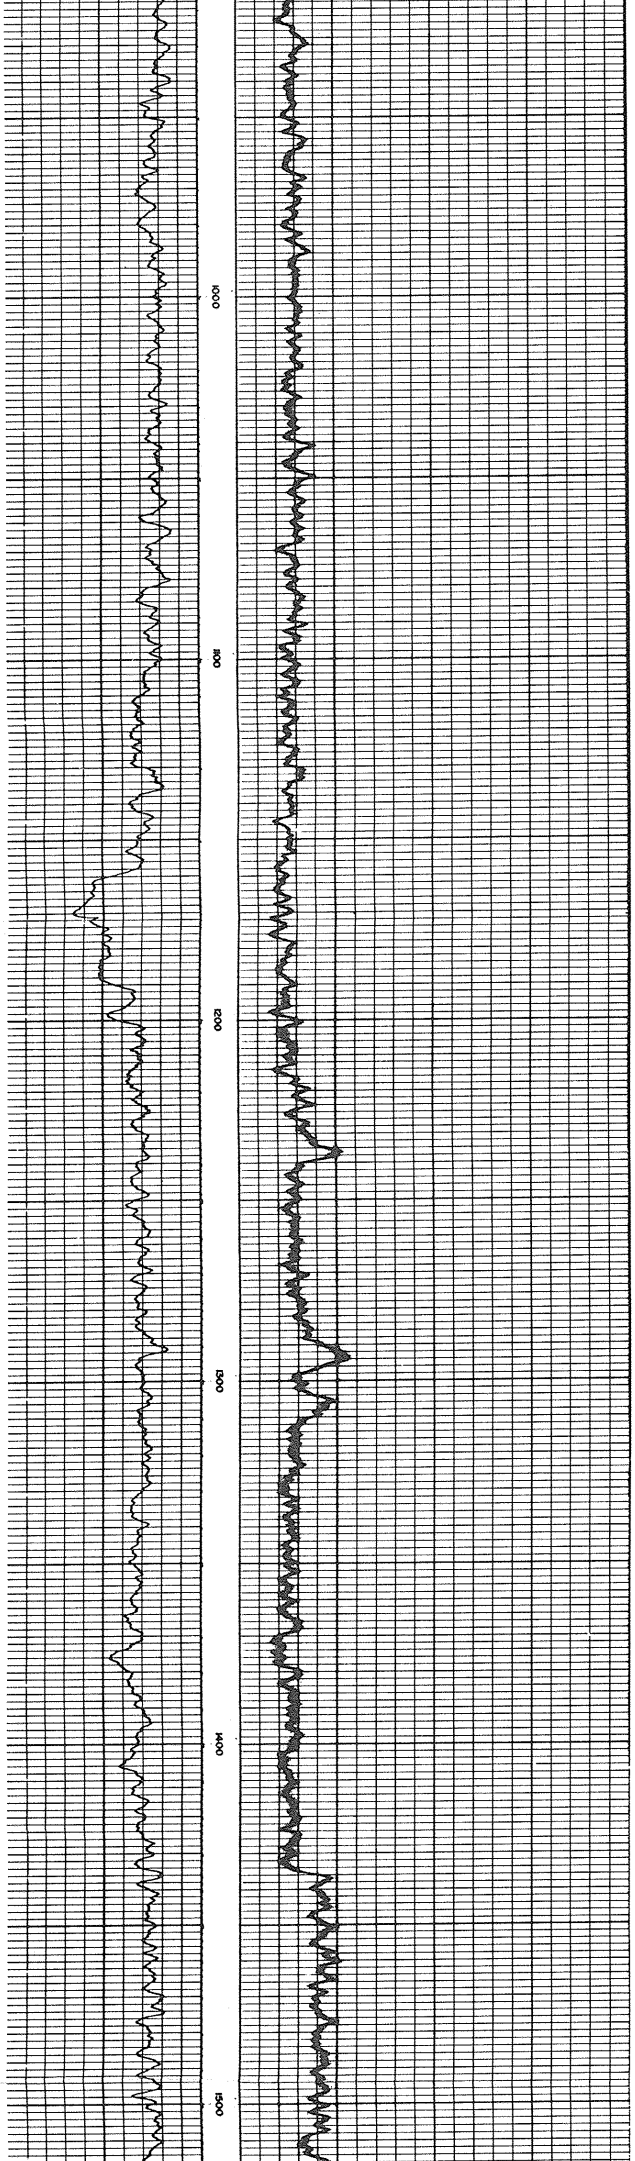

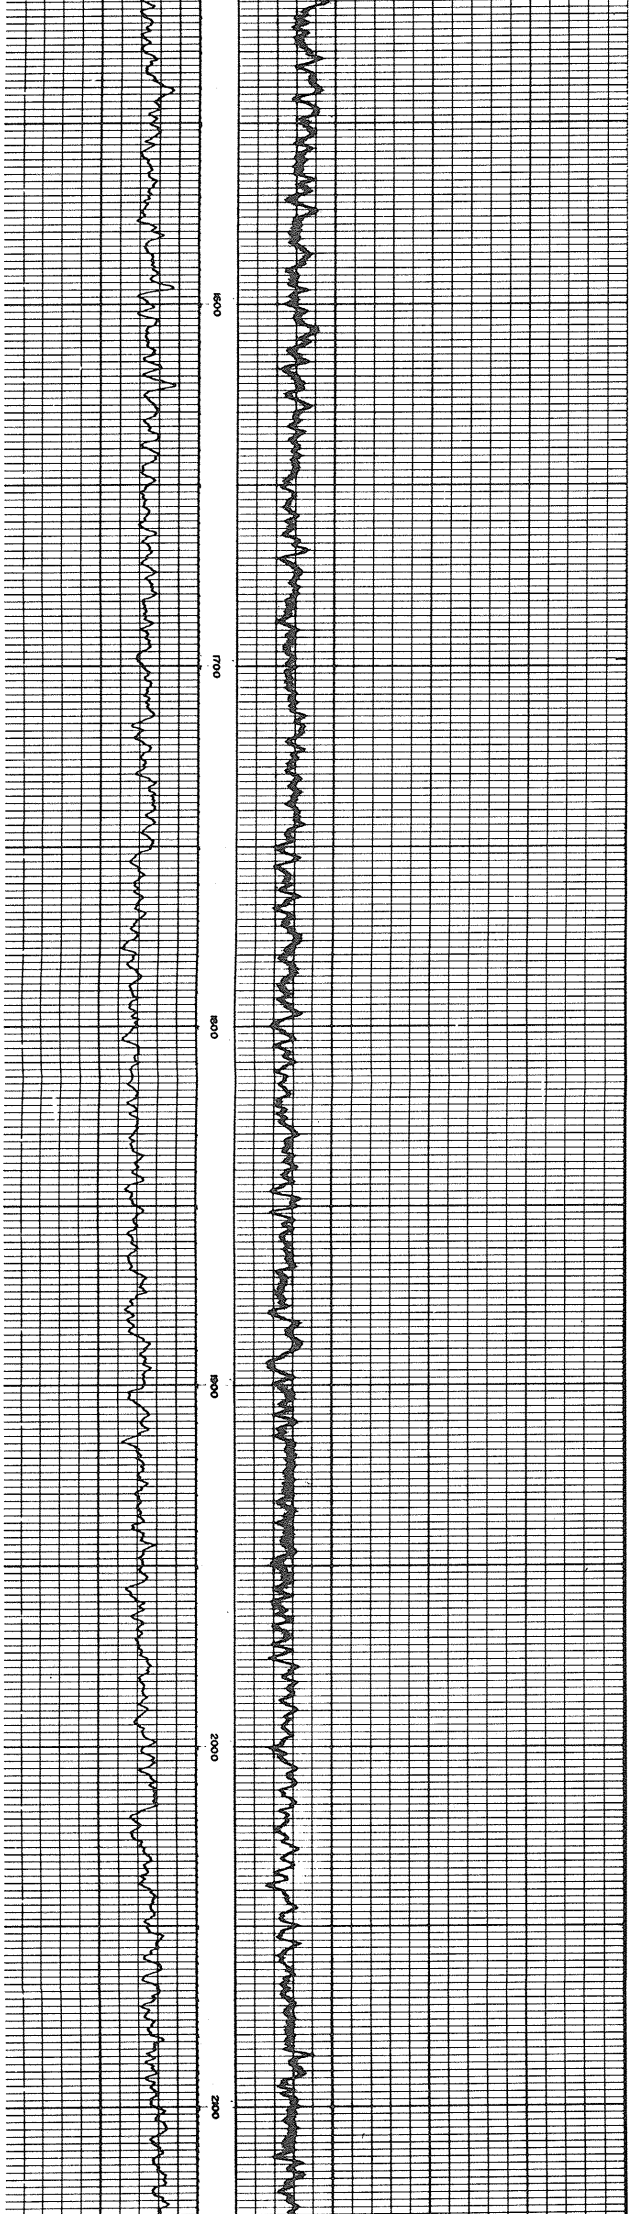

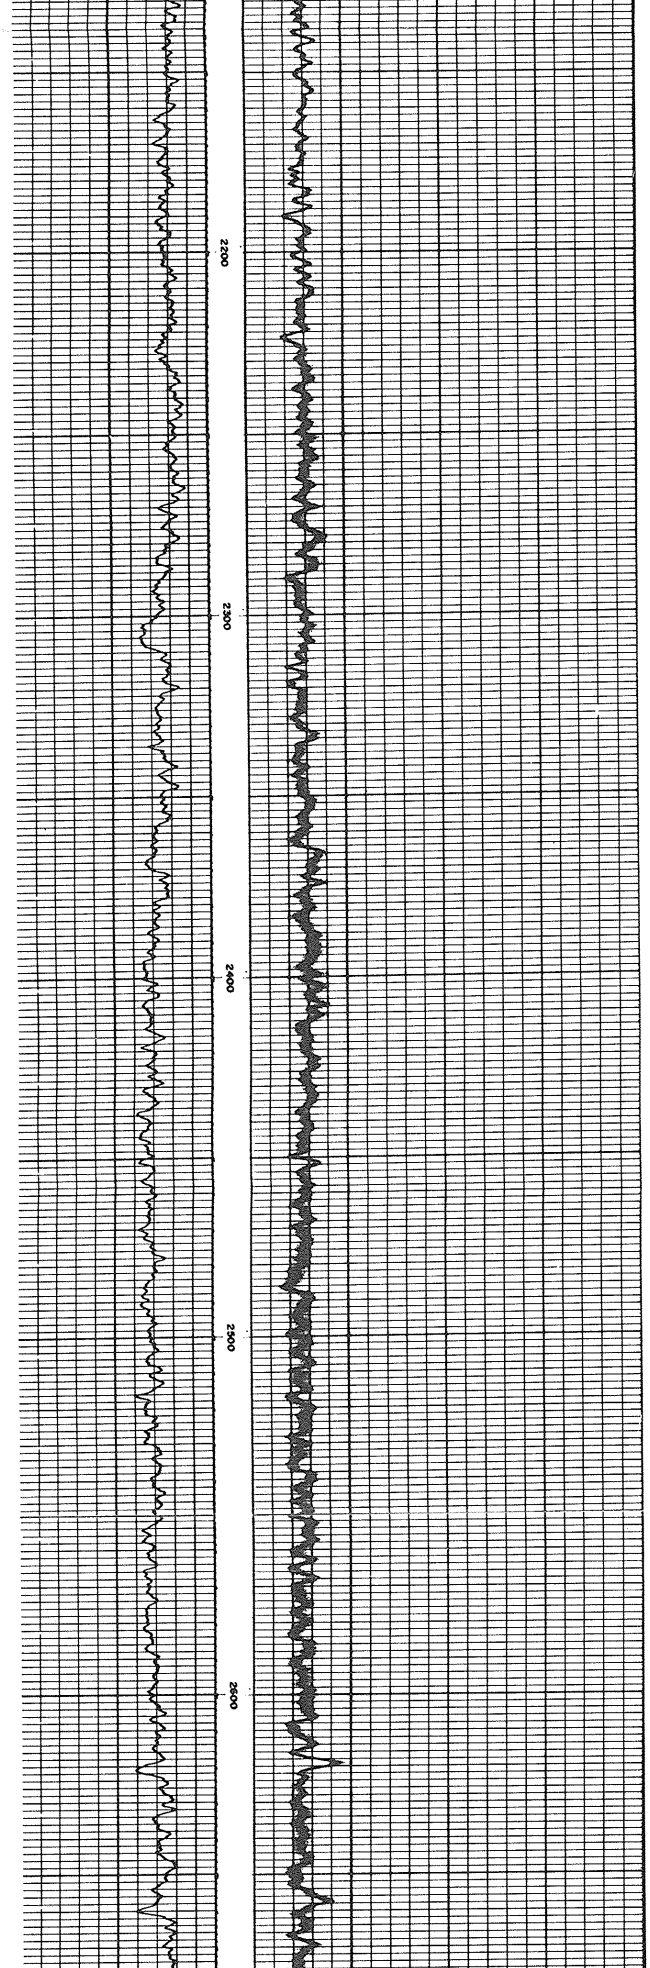

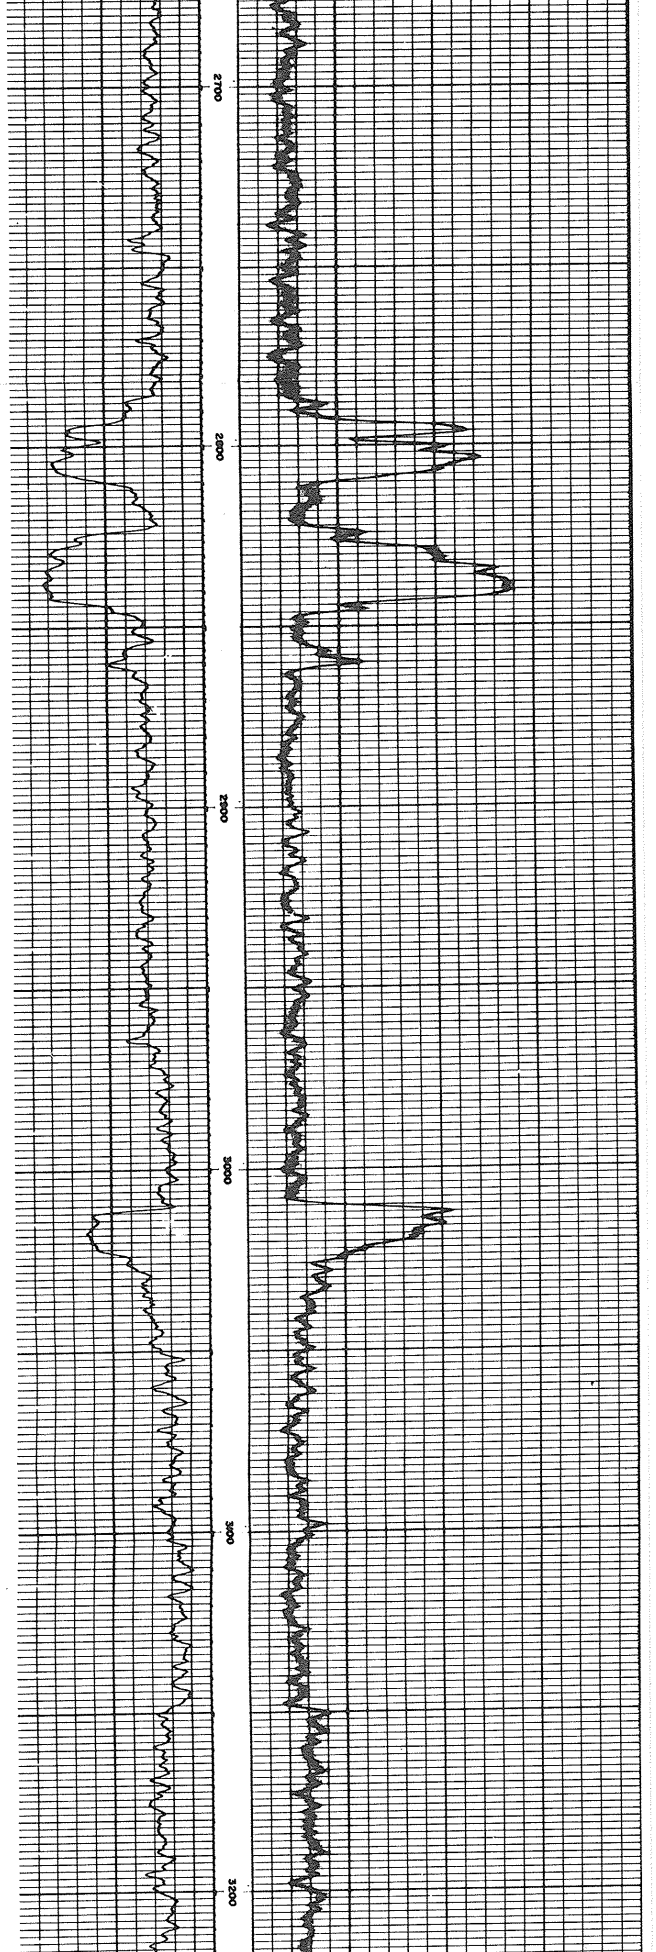

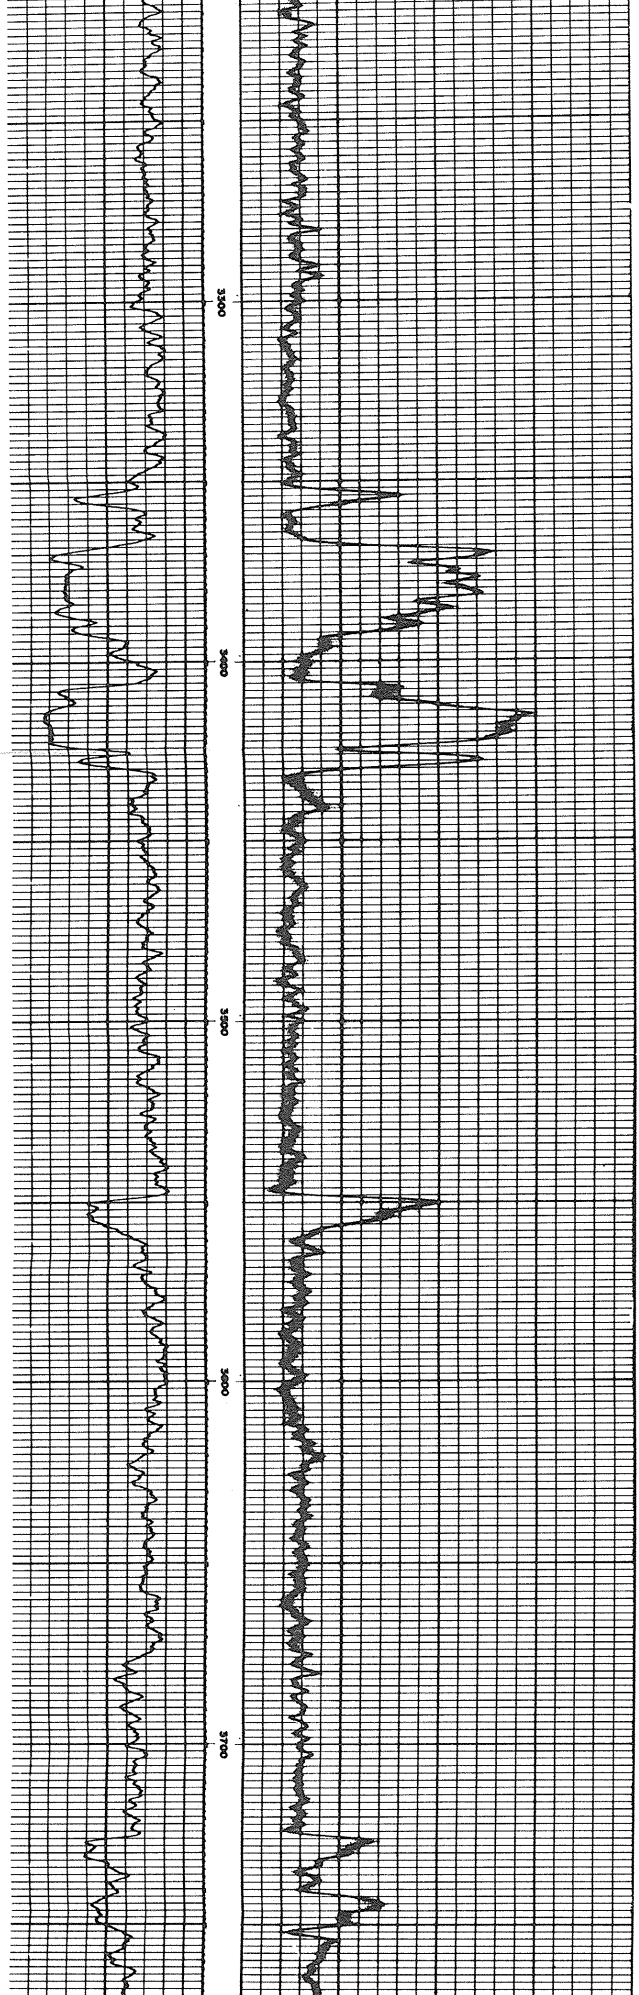

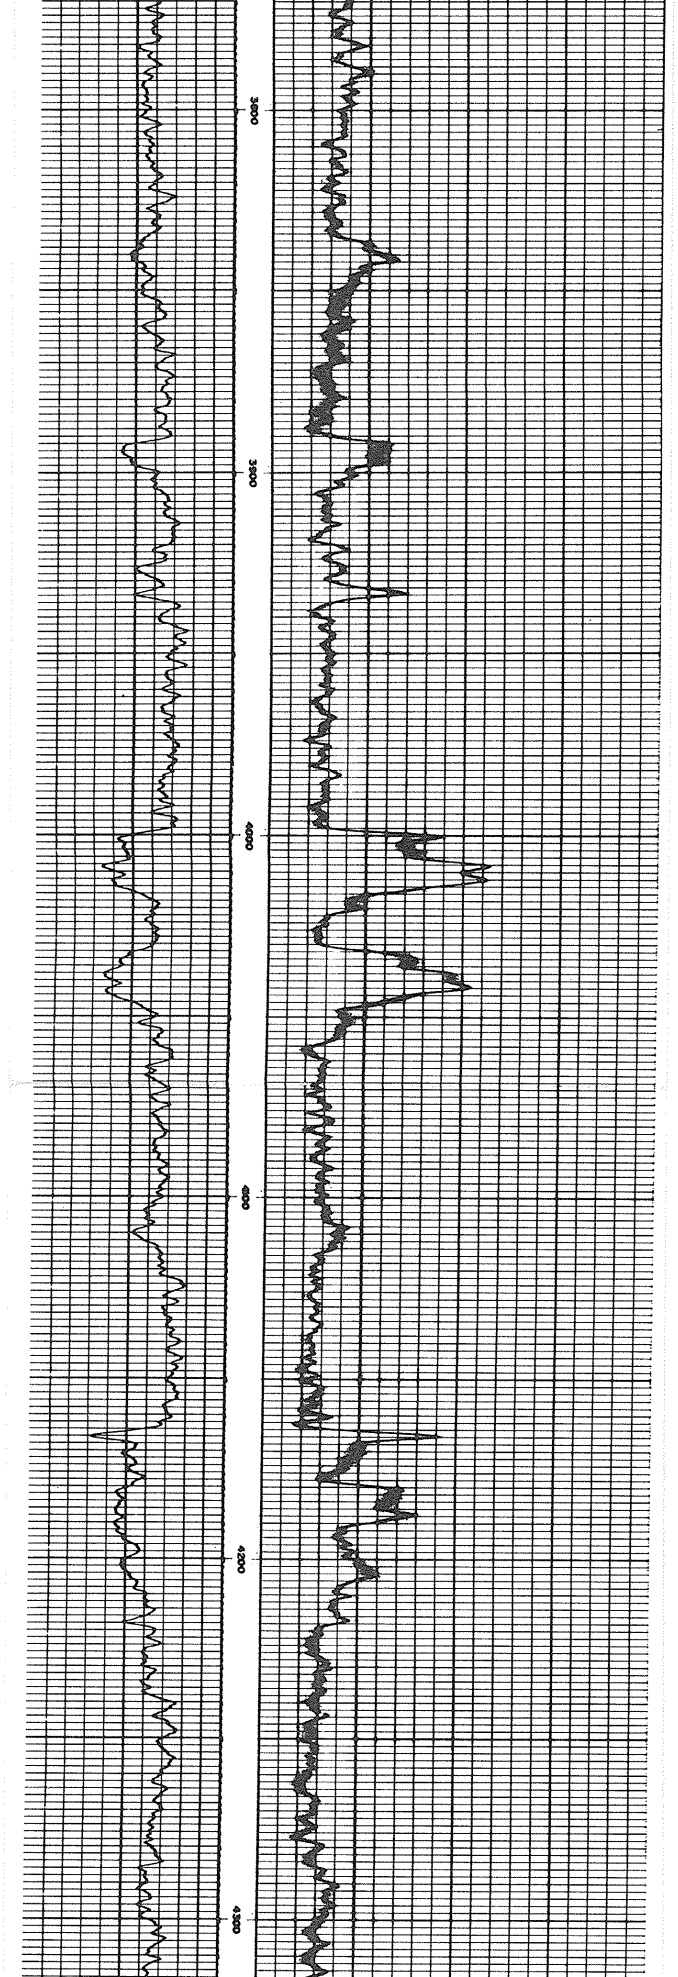

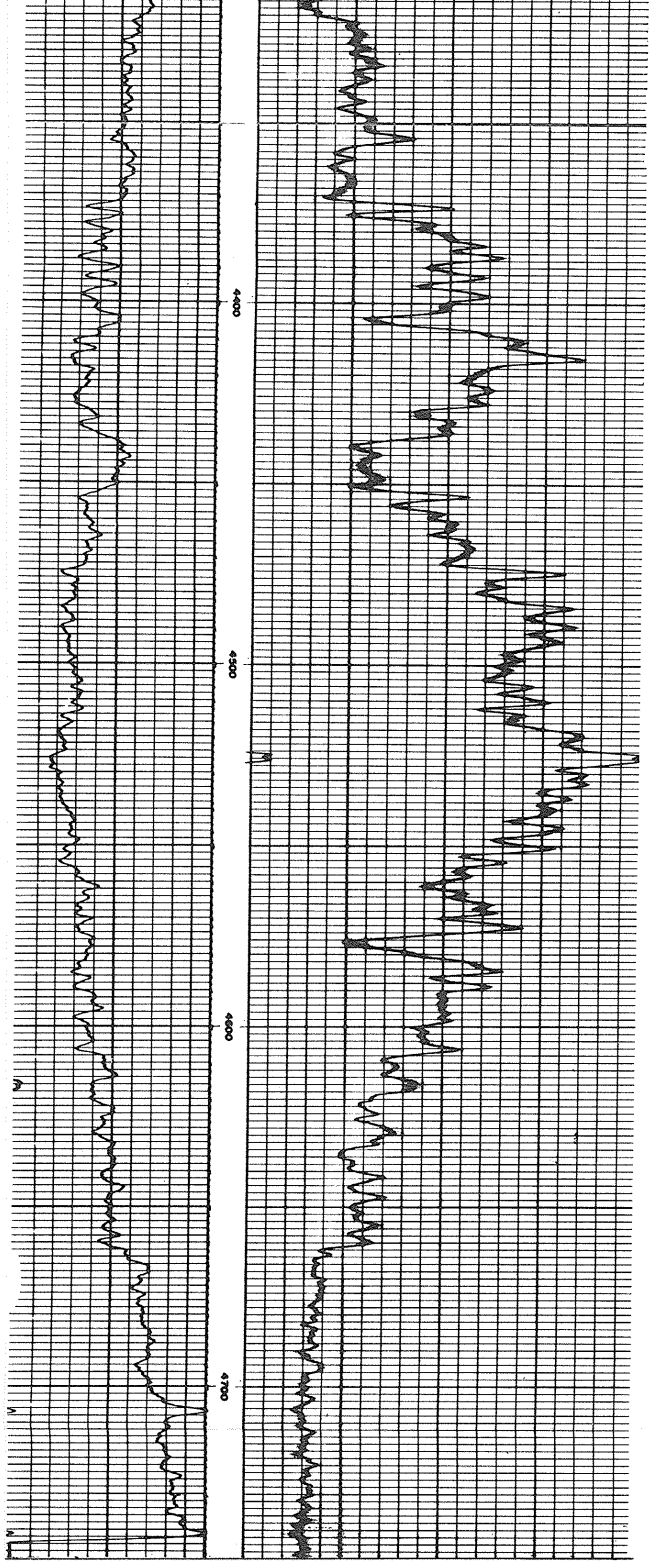

REPEAT SECTION





INTERVAL: 100 to 4737
Sens. 300 T.C. 2
Logging Speed 20 ft./min.
ZERO 0 div. to left
0 → 120
120 → 240

CASING COLLARS

INTERVAL: 100 to 4737
Sensitivity 300 Time Constant 2
Logging Speed 20 ft./min.
ZERO 3 divisions to left of this line
270 11.70 → 2070

GAMMA RAY
API UNITS

NEUTRON
STANDARD COUNTS/SECOND

COMPANY PAN AMERICAN PETROLEUM CORPORATION
WELL PAN AM HOME SIGNAL CSP A-1 KOTANEELEE YT J-50
FIELD WILDCAT PROVINCE YUKON TERRIIORY

Elev.
SOC FR 4737 KB 1490
SOC TD 4738 DF
DRLR TD 4733 GL 1475.25

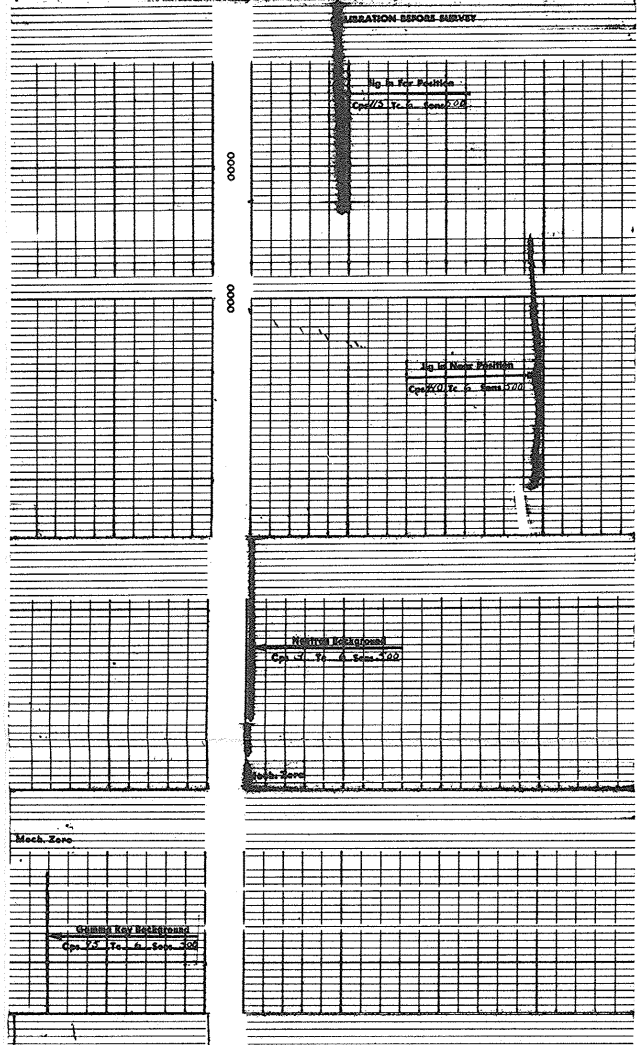

Cps 115 Tc 6 Sens 500

Cps 940 Tc 6 Sens 500

Cps 7 Tc 6 Sens 300

Cps 75 Tc 6 Sens 300

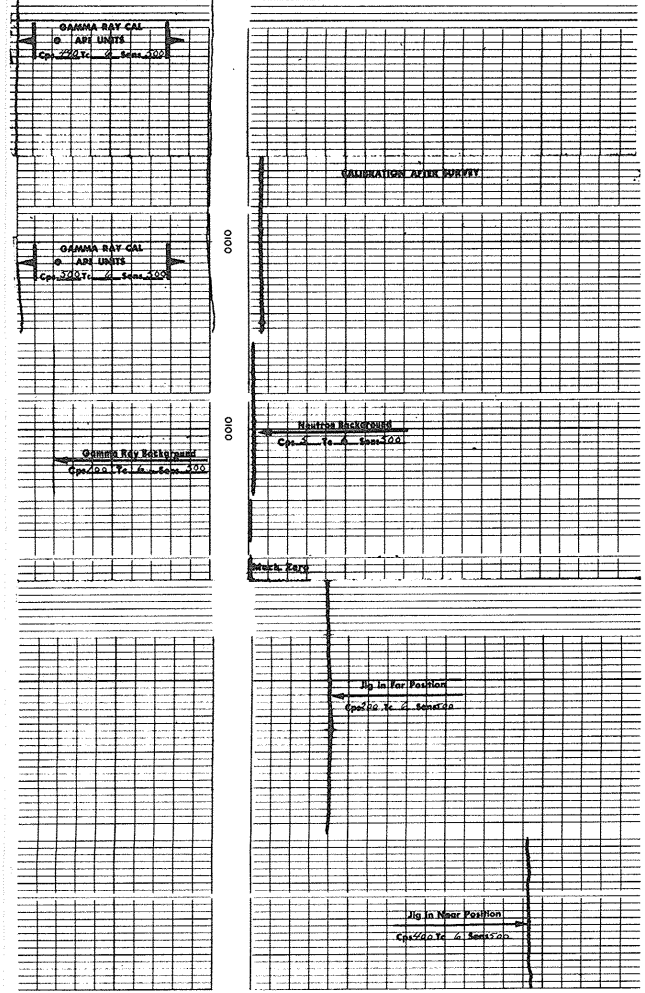

FILE NO. 81746