


DRIVING AND YARDAGE ESTIMATE

UNIT	AREA SQ. YDS.	No of POINTS	AVG. DEPTH (ft)			TOTAL FOOTAGE	VOLUME CU. YDS.
			MUCK	GRAVEL	B.R.		
1	20,091	823	20	9	29	23,867	207,607
2	13,702	562	15	9	24	13,488	118,731
3	8,272	339	8	6	14	4,746	42,114
4	7,964	326	10	8	18	5,868	53,093
5	11,403	467	9	10	19	8,873	79,921
6	12,091	495	5	7	12	5,940	56,425
TOTAL	73,523	3,012				62,782	559,811

PROBABLE DRIVING RATE PER 1000 LB. DAY 100 FL
 PROBABLE DRIVING SEASON 36 Days
 CREW REQUIRED 18
 DRIVING ORDER No 1 PUMP STATION 1 x 2
 No 2 PUMP STATION 3, 4, 5 x 6

LEGEND

- Old Dredge Cut
- Dredge Limit
- Top of Stepping Bank
- Theoretical
- Actual
- Power Line
- Creek
- Cross Section Line
- Coordinate Lines
- Claim Boundary
- Pipe Line 1st pos'n
- Pipe Line 2nd pos'n
- Drill Hole 100 above
- Thermal
- Frozen

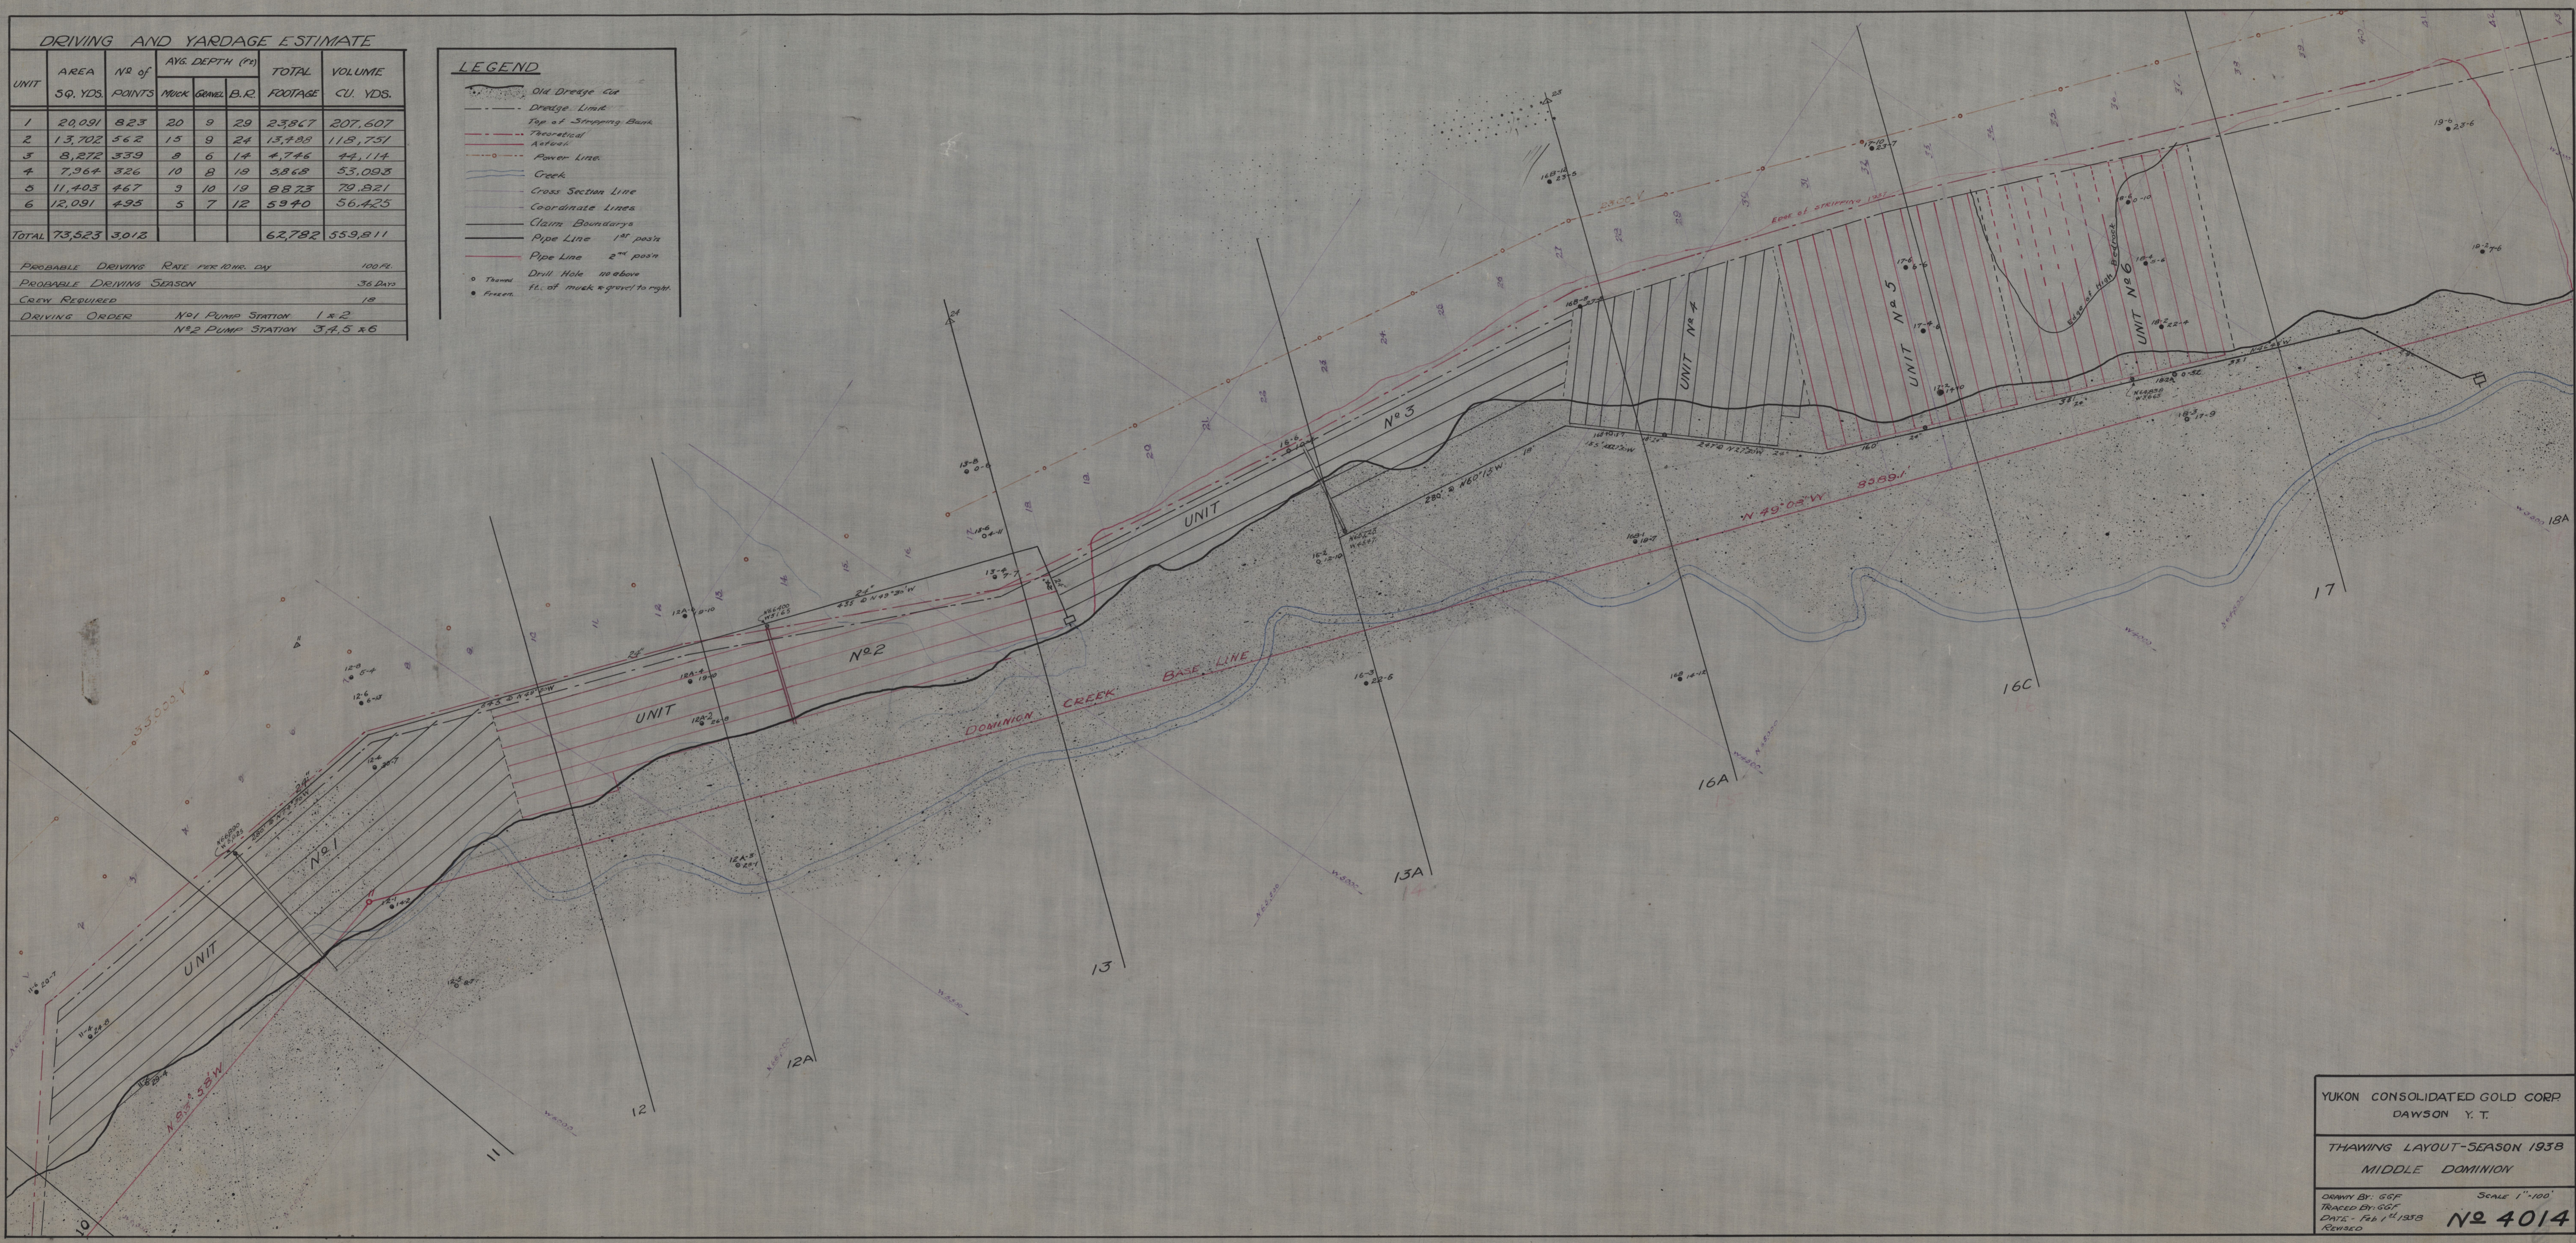

YUKON CONSOLIDATED GOLD CORP
 DAWSON Y. T.
 THAWING LAYOUT-SEASON 1938
 MIDDLE DOMINION
 DRAWN BY: GGF
 TRACED BY: GGF
 DATE - Feb 12, 1938
 REVISION
 SCALE 1"=100'
 No 4014