
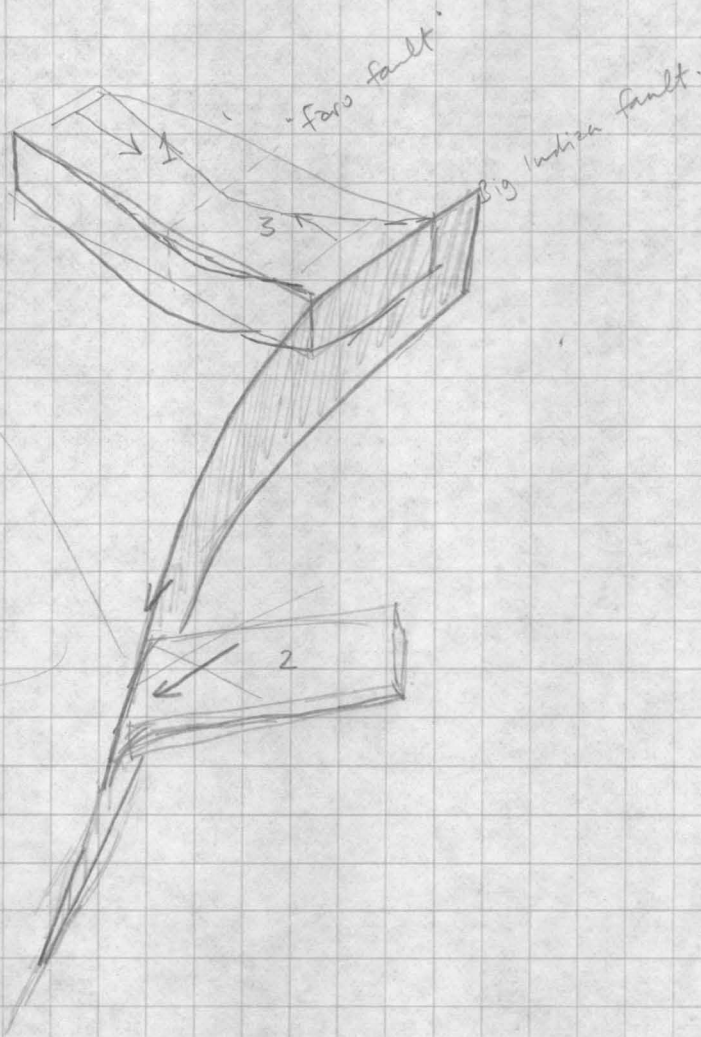


000864



zone 2

3750
3790
3830
3870

FRH 1
5
6

✓
✓
✓

d. dep.
3915.3 420.0
3950.9 230.0
3946.6 315.0

3790 40' @ 8.1%
3870 40' @ 5.5%
3750 40' @ 6.2%

o 65-50 ✓✓
o -51 ✓
+57 ✓✓
+58 ✓✓
o -59 ✓
-61 ✓
-62 ✓

← not possible to get 40' value ≥ 5%
← " " " " " "

* 67-13 ✓✓
* -16 ✓✓
+17 ✓✓
+18 ✓✓✓
-20 ✓
+21 ✓✓
+22 ✓✓
23 ✓✓ ←
25 ✓ ←
-26 ✓✓
* 27 ✓✓
-28 ✓✓
-29 ✓ ←
-31 ✓✓

3870 = 79'

2.9 5.2 0.10 → 3870
2.8 4.3 0.07 → 3830
1.5 3.9

← 3710. project from elsewhere.

← not possible to get 40' value ≥ 5%.

69-109 = 3790 : 3.8, 4.4; 80-120 ≈ 3750 : 3.0, 3.8

← not possible to get 40' value ≥ 5%.

2 vs.

3.275
1.525

65-50.

106	-107	2	Pb	Zn	Cu	3830 = 119'
			4.6	6.2	0.18	

65-51.

61-	64.4	34	tr	0.4	0.07
	65.5	1.1	tr	1.0	0.24
	68.5	3	0.4	4.8	0.21
	73.5	5	4.6	14.1	0.01
	80.0	6.5	5.9	6.9	0.22
	85	5	5.0	5.7	0.15
	86.4	14	3.4	4.5	0.37
	89.5	16/1.5	1.0	3.8	-
	94.5	5	6.9	6.6	0.15
	108	135(11)	7.0	9.7	tr
	113.5	5.5	4.8	7.5	tr
	116.5	3	8.2	9.4	0.22
	118.9	24	2.5	7.0	0.12
	121.3	24	1.0	2.3	tr
	126.1	4.8	1.1	1.7	tr
	130.6	45 (1.9)	1.4	2.1	tr

(68.5 → 105.5 5.2% Pb
7.9% Zn)

3830 = 88'
~~128'~~

88 → 128 4.9% Pb 6.2% Zn

3790 = 128'

65-58

		Pb	Zn	Cu
64-69	5	3.5	6.6	0.07
69-74	5	6.3	10.3	tr
74-75	1	6.0	8.8	tr
75-80	5	1.7	8.8	tr
81-88.5	2 ¹ / _{0.5}	1.1	8.4	tr
88	4 ¹ / _{0.5}	1.6	8.4	tr
92.5	4 ¹ / _{0.5}	1.3	7.6	0.01
97.5	5	1.1	4.3	0.19
102.5	5	2.6	3.7	0.07
107.5	5	1.5	2.8	0.01
111.5	4	tr	1.3	0.01
115.5	4	1.4	4.4	0.01
120.5	5	0.6	3.1	0.07
125.5	5 ¹ / _{0.5}	2.5	5.1	0.07
130.5	5	1.7	3.4	0.01
132	1.5	0.2	5.4	0.07
137	5	1.1	2.8	0.27
140	3	6.1	8.6	0.07
145	5	0.3	3.1	0.01
150	5	1.0	2.8	0.07
152	2	tr	1.8	0.01
158	6	1.0	2.3	tr
163	5	tr	0.2	tr
168	5	tr	tr	tr
173	5	0.1	tr	tr
178	5	0.7	0.6	tr
183	5	0.5	3.2	tr
188	5	0.4	2.9	tr
193	5	1.9	2.6	tr
198	5	0.4	1.1	tr

~~3830~~
3830 = 83'

25

3790 = 123'

3750 = 163'

65-59

		Pb	Zn	Cu
70-75	S	1.5	4.6	0.27
80	S	5.4	9.4	0.01
85	<u>S</u>	5.6	4.8	0.21
90	S	7.6	6.7	0.16
95	S	3.3	4.7	0.01
100	S	2.0	2.9	0.01
105	S	6.1	4.2	0.07
110	S	3.8	6.1	tr
115	S	0.5	1.8	tr
120	S	tr	0.7	tr
125	<u>S</u>	0.5	1.1	tr
130	S	tr	0.4	tr
135	S	tr	0.4	0.07
140	S	0.1	0.2	0.01

3830 = 85'

4.4 5.4 → 3790

3790 = 125'

3.0 3.5

65-57

75-80	S ₁	0.3	1.4	0.16
84	1/3	4.8	4.2	0.22
90	6	4.2	8.5	tr
93	3	3.2	6.0	0.15
96	3	2.7	2.7	0.15
101	<u>S</u>	2.6	7.2	tr
106	S	1.7	4.6	0.01
111	S	1.2	2.2	0.07
116	S	1.8	2.7	0.07
121	<u>S</u>	1.8	4.5	0.01
125	4	2.7	5.4	0.15
130	S	0.6	1.7	tr
133	5/35	0.4	0.3	tr

3910 = 81'

3870 = 121'

65-61

		Pb	Zn	Cu		Pb	Zn	Cu
115-120	S	2.2	5.0	tr	3750 = 121'	83-85	0.1	0.3
120-125	1/4	2.3	3.7	0.01		85-86	2.7	6.1
125-130	S	1.8	3.6	0.01		86-90	tr	0.5
130-135	S	1.4	3.1	tr		95	0.2	0.6
135-140	S	1.3	3.7	tr.		100	tr	1.3
						105	tr	0.6
						110	tr	1.9
						115	2.2	4.6

65-62

183-188	S	1.0	1.8	0.01	3750 = 195'
188-195	T	1.0	1.4	0.01	
195-200	S	0.3	2.7	tr	
200-205	S	3.3	5.9	0.01	
205-210	S	1.7	4.1	tr	
210-215	S	2.1	2.8	tr	3710 = 235'
215-220	S	0.2	1.7	tr	
220-225	S	0.8	1.6	tr	
225-230	S	0.6	1.7	0.01	
230-234	A	1.2	3.2	0.01	
234-240	1/8	0.2	0.5	tr	
240-245	S	0.1	0.5	tr	
245-250	S	tr	0.2	tr	

1.2. 2.3.

