Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P900 0E	6716	0.5						
	6717	3.0						
10E	6718	3.5						
20E	6719	4.3						
30E	6720	1.1						
40E	6721	1.3						
	6722	2.3						
50E	6724	4.2						
60E	6725	2.2						
	6723	0.6						
70E	6721	2.1						
80E	6245	2.0		102	5.5/2.5			
90E	6243	3.0	Tr.	1.2		2.3		
	6244	3.2	.01	.50		0.3		
P901	0E	6242	3.8		2.40	5.3/2.0		
10E	6241	4.5	.01	.40				
20E	6240	3.2		.14				
30E	6239	4.1	.03	.18		0.2		
40E	6238	6.4		.26				
P902	0E	6237	3.9	.01	.84		0.2	
10E	6236	4.7		3.00				
20E	6234	5.4	.02	3.48	3.8/4.0	4.3	} 0.62	
	6235	1.3	Tr.	.36				
30E	6232	4.7	Tr.	1.80	1.80/2.0			
	6233	2.5	Tr.	.96				
40E	6228	1.2		2.36	9.5/5.0			
	6229	2.3	.01	3.44		4.3		0.5
	6230	1.7	Tr.	11.4		18.6		0.6
	6281	2.7	Tr.	1.46		1.1		
P903	0E	6226	2.6		18.6	12.0/2.0	} 12.36	
	6227	3.9		.60				
10E	6223	1.9	.08	10.8	5.0/2.0			0.5
	6224	1.6	Tr.	1.00				
	6225	3.5	.01	3.10		0.4		0.5
20E	6221	4.8		2.06	4.0/2.0			0.3
	6222	1.9	Tr.	.10				
30E	6218	1.4	Tr.	.86	3.0/2.0	0.5		
	6219	2.2	.01	1.64				
	6220	2.7	Tr.	.26				
40E	6215	2.7	.01	1.40	1.8/2.0	1.2		
	6216	0.9	Tr.	1.80				
	6217	3.2		.30				
50E	6213	5.3	Tr.	1.44				
60E	6212	4.8	.02	4.20	4.5/2.0			
70E	6211	7.1	.01	4.0	3.0/2.0			
80E	6211	3.3	Tr.	5.10	4.7/2.0	0.7		
90E	6208	1.1		.24	8.0/2.0			
	6209	2.8	Tr.	1.14				
	6210	1.7		.36				
P904 0E	6204	1.3	Tr.	22.2	14.0/3.2	10.4	} 7.40	0.8
	6205	0.9		.14				
	6206	2.0	.01	1.44		2.9		0.6
	6207	2.7	.01	1.00		0.4		0.2
10E	6201	0.6		13.2	2.2/3.0			
	6202	4.4		1.24				
	6203	1.5		.50				
20E	6196	1.0	Tr.	1.60		5.0		
	6197	1.4		2.28	8.5/4.0			
	6198	2.7	.01	1.96		3.6		
	6199	1.9	.01	5.20		4.7		
	6200	1.7	Tr.	2.08				
30E	6190	1.1	Tr.	.97				
	6191	0.8		2.30				
	6192	1.6	Tr.	10.1	7.5/3.0			
	6193	2.0		3.24				
	6194	2.2		4.10				
	6195	1.8		.40				
40E	6186	2.9	Tr.	.60		3.8		
	6187	3.9	.006	213.2	20.0/2.0	2.2		212
	6188	1.1	.002	5.28		2.8		
	6189	2.0	Tr.	9.20	12.0/2.0	4.0		
50E	6180	0.6		20.2				
	6181	1.3		1.04	4.0/2.0			
	6182	2.5		1.40				
	6183	1.9		.82				
	6184	2.0		4.80				
	6185	1.3		1.10				
60E	6246	0.6	Tr.	3.70	6.5/2.0			9.8
	6247	1.6	Tr.	7.40				1.76
	6248	1.4	.01	3.80				2.6
	6249	1.7	Tr.	1.00				0.7
	6250	1.7	.02	1.17				3.3
	6251	1.3	Tr.	.86				
	6252	0.9	Tr.	1.80				
70E	6253	1.0		3.68	4.0/2.0			
	6254	1.7		8.64				
	6255	2.1		7.10				
	6256	1.1						
	6257	1.9		1.86				
80E	6258	2.2	.006	11.30	5.0/2.0	3.7		
	6259	0.9	.002	1.16		1.9		
	6260	1.9	.01	11.30		5.3		
90E	6261	1.2		.40				
	6262	1.8		2.96	5.0/2.0			
	6263	0.8		1.67				
	6264	1.5		2.80				

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P905 0E	6265	3.1	Tr.	.14	14.0/2.0			
	6266	1.2	Tr.	6.14		7.2		
	6267	3.1	.02	6.80		4.8		
	6268	2.5	.02	3.19		18.0		
10E	6269	3.3		1.90				
	6270	3.8		2.44				
	6271	2.6		4.16	4.0/2.0			
	6272	1.5		28.1				
20E	6273	3.2	Tr.	.40				
	6274	1.8	Tr.	.76		6.2		
	6275	0.9	Tr.	15.80		11.5		
	6276	1.4	.01	4.94	44.7/2.0	2.5		
	6277	2.6	.01	4.20		1.7		
	6278	1.6	Tr.	16.0		16.0		
30E	6279	2.5		.34				
	6280	2.4		2.96				
	6281	2.4		4.43	12.0/2.0			
	6282	2.8		8.40				
	6283	1.2		2.24				
40E	6284	2.0	.01	1.20		6.6		
	6285	2.2	.01	6.94	5.0/2.0	2.7		
	6286	2.4	.04	2.20		1.4		
	6287	4.1	.01	2.36		1.4		
50E	6288	3.6		10.69	7.0/2.0			
	6289	2.8		6.26				
	6290	1.2		3.56				
	6291	5.2		3.28				
60E	6292	1.0	.04	12.8		3.8		
	6293	2.2	Tr.	90.8	4.0/2.0	16.2		
	6294	2.4	.04	3.78	4.0/2.0	1.4		
	6295	2.8	Tr.	9.60		2.8		
	6296	0.6	Tr.	26.34		30.8		
70E	6297	1.2		.80				
	6298	0.9		1.10				
	6299	1.0		8.40	4.0/2.0			
	6300	4.6		7.24				
	6301	1.1		2.90				
	6302	2.5		2.20				
80E	6303	3.1	.01	5.40		2.5		
	6304	1.5	.01	2.24		1.7		
	6305	1.0	.03	12.8		4.2		
	6306	3.4	.01	26.5	4.0/2.0	12.2		
	6307	2.6	.01	3.14		2.4		
	6308	1.5	.01	1.72		8.5		
90E	6309	1.2		3.84				
	6310	0.9		1.36				
	6311	1.3		2.30				
	6312	4.2						
	6313	4.9		1.26				
P906 0E	6314	2.8	Tr.	2.04		1.5		
	6315	1.3	Tr.	6.94		15.0		
	6316	4.7	.01	2.64	4.0/2.0	1.6		
	6317	1.7	Tr.	3.44		2.9		
	6318	3.3	.01	22.6		6.3		
10E	6319	2.2		2.60				
	6320	1.7						
	6321	3.1		9.20				
	6322	1.5		41.9				
	6323	3.2						
	6324	3.1						
20E	6325	1.7	Tr.	10.4		10.4		
	6326	0.8	Tr.	8.60		2.0		
	6327	1.2	.01	18.4		2.2		
	6328	0.9	.002	7.11		5.8		
	6329	3.4	.01	2.76	12.0/4.0	1.8		
	6330	1.8	.002	8.40		1.7		
	6331	3.1	.002	16.1		7.5		
	6332	2.8	.002	2.44		0.5		
	6333	4.9	.002	2.36		0.4		
30E	6334	1.9		.32				
	6335	1.0		7.70				
	6336	2.3		5.70				
	6337	1.1		8.54				
	6338	2.6		19.5				
	6339	4.5						
	6340	5.7		.56				
35E	6179	0.3	Tr.	88.4		387		
40E	6341	1.1	.002	4.41		16.7		
	6342	2.1	.002	6.78		13.4		
	6343	1.9						
	6344	3.6						
	6345	3.1	.01	.56		0.8		
	6346	2.6	.002	1.44		1.6		

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P907 0E	6347	3.9		7.60				
	6348	3.1		.40				
	6349	1.1		.36				
	6350	1.2		.16				
	6351	1.8						
10E	6352	2.2	.01	27.7		7.7		
	6353	1.5						
	6354	2.1	Tr.	.60		1.5		
	6355	4.5	.006	3.20		1.3		
20E	6356	2.7		2.96				
	6357	2.3						
	6358	2.6		.40				
	6359	2.8		.64				
30E	6360	0.9	.006	2.04		4.4		
	6361	2.2	.01	.70		1.8		
	6362	2.9	.006	1.10		2.2		
	6363	1.0						
40E	6364	0.7		.70				
	6365	1.7		8.30				
	6366	1.4		1.80	4.0/2.0			
	6367	1.7		1.00				
	6368	1.7		1.20		1.4		
50E	6369	2.2	Tr.	1.44		0.8		
	6370	1.3	.04	7.44		2.4		
	6371	1.8	Tr.	7.80		3.8		
	6372	1.3						
	6373	2.2	.18	1.48		2.2		
60E	6374	0.9		.44				
	6375	1.0		4.64				
	6376	2.3		4.34				
	6377	3.2		1.28				
	6378	3.7						
70E	6379	2.0		3.40	4.0/2.0			
	6380	2.1	.006	3.44				
	6381	1.2	Tr.	1.58				
	6382	2.0		2.54				
	6383	1.6		3.04				
	6384	2.8		4.34				
80E	6385	2.3						
	6386	1.5		1.14				
	6387	2.9						
	6388	4.0						
	6389	2.9		3.14				
90E	6390	2.0		2.34				
	6391	3.0						
	6392	2.3						
	6393	2.8		1.14				
	6394	1.8						
P908 0E	6395	2.1						
	6396	2.8		6.94				
	6397	1.9						
	6398	2.3		3.44				
	6399	3.3		2.44	4.0/2.0			
10E	6400	2.6	Tr.	1.94				
	6401	4.6		1.04				
	6402	4.0		3.20				
	6403	4.5						
20E	6404	2.4						
	6405	1.9						
	6406	2.8		.70				
	6407	1.2		.14				
	6408	0.8		1.24				
	6409	1.0						
	6410	4.4		1.64				
30E	6411	2.3						
	6412	1.6	Tr.	3.80				
	6413	3.7	Tr.	2.70				
	6414	0.8	.006	.84				
	6415	2.2						
40E	6416	1.7		.78				
	6417	0.9						
	6418	1.8						
	6419	2.2						
	6420	3.5						
	6421	2.3		1.34				

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P908 50E	6422	1.8						
	6423	1.1	.02	20.4				
	6424	2.5						
	6425	2.7						
	6426	5.8						
	6427	1.0		6.44				
60E	6428	3.5						
	6429	2.2						
	6430	3.6						
	6431	1.9		3.20				
	6432	1.8		9.0				
	6433	1.1						
70E	6434	4.5						
	6435	2.2						
	6436	3.6	Tr.	.34				
	6437	1.7						
	6438	0.5	.10	2.74				
80E	6439	2.2		.08				
	6440	1.9		.44				
	6441	1.4						
	6442	2.4		1.34				
	6443	2.7		.28				
	6444	1.8						
	6445	0.8						
	6446	2.7						
90E	6447	0.6						
	6448	0.6						
	6449	0.5	Tr.	41.9				
	6450	0.4		11.7				
	6451	0.8	.005	14.04				
	6452	0.9	.002	2.64				
	6453	2.4	Tr.	.60				
	6454	1.1						
P909 0E	6455	1.0						
	6456	0.9	Tr.	4.56				
	6457	1.0	Tr.	9.84				
	6458	0.6						
	6459	0.5						
	6460	1.8		4.64				
10E	6461	2.9	.002	2.44				
	6462	0.8						
	6463	0.8						
	6464	0.7						
	6465	1.1	.005	.74				
20E	6466	2.7						
	6467	2.3						
	6468	2.6						
30E	6469	1.1	.002	2.64				
	6470	1.6						
	6471	0.5	.01	.34				
	6472	2.0						
	6473	4.0						
	6474	1.6						
35E	6475	0.8		1.04				
	6476	1.2						
40E	6477	2.0		.60				
	6478	0.8						
	6479	1.6		3.00				
	6480	1.4		10.54				
	6481	1.6						
	6482	4.2						
	6483	1.4		.44				

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P909 50E	6484	1.2						
	6485	1.9		3.34				
	6486	1.5						
	6487	2.3		6.88				
	6488	0.4	Tr.	2.30				
	6489	1.3						
	6490	0.8						
	6491	1.5	Tr.	.30				
	6492	1.7						
60E	6493	1.5						
	6494	2.3		2.84				
	6495	1.7						
	6496	1.7		1.68				
	6497	0.8						
70E	6498	2.1		.30				
	6499	1.1						
	6500	1.4						
	6626	1.1						
	6627	0.4						
	6628	0.6						
	6629	2.8	.01	3.06				
80E	6630	2.8						
	6631	4.0		0.84				
	6632	2.6						
	6633	1.1						
90E	6634	3.7	.005	0.84				
	6635	2.9						
	6636	2.2	.02	2.94				
	6637	1.5						
	6638	1.6						
95E	6639	1.4						

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P910 0E	6640	2.2		.38				
	6641	0.8						
	6642	0.7						
	6643	2.0						
	6644	2.0						
5E	6645	2.0		2.24				
10E	6646	2.0						
	6647	0.8						
	6648	1.2	Tr.	.76				
	6649	7.0						
	6650	1.4	Tr.	.16				
20E	6651	0.6		1.70				
	6652	0.7		2.40				
	6653	0.5		.94				
	6654	1.2						
	6655	0.8						
	6656	1.6						
	6657	1.3		.52				
30E	6658	1.0						
	6659	0.3						
	6660	3.0		.24				
	6661	2.5						
	6662	0.7						
	6663	2.6						
40E	6664	0.5		.86				
	6665	1.2						
	6666	0.8						
	6667	1.0						
	6668	2.7						
	6669	2.0						
	6670	1.0						
	6671	0.9						
	6672	0.8						
	6673	1.1						
45E	6674	1.7						
	6675	1.8						

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P911 0E	6676	1.1						
	6677	1.4						
	6678	0.8						
	6679	3.4						
	6680	1.0						
	6681	1.1						
	6682	1.5						
	6683	3.0						
	6684	0.7						
	6685	1.2						
5E	6686	1.1						
	6687	1.7						
	6688	1.1						
10E	6689	1.8						
	6690	0.8						
	6691	4.6						
	6692	1.0						
	6693	0.9	Tr.	4.52				
	6694	1.8						
	6695	1.6						
	6696	2.7						
	6697	1.1						
20E	6698	2.3						
	6699	5.6						
	6700	1.8						
	6701	2.2						
	6702	5.0						
	6703	2.1						

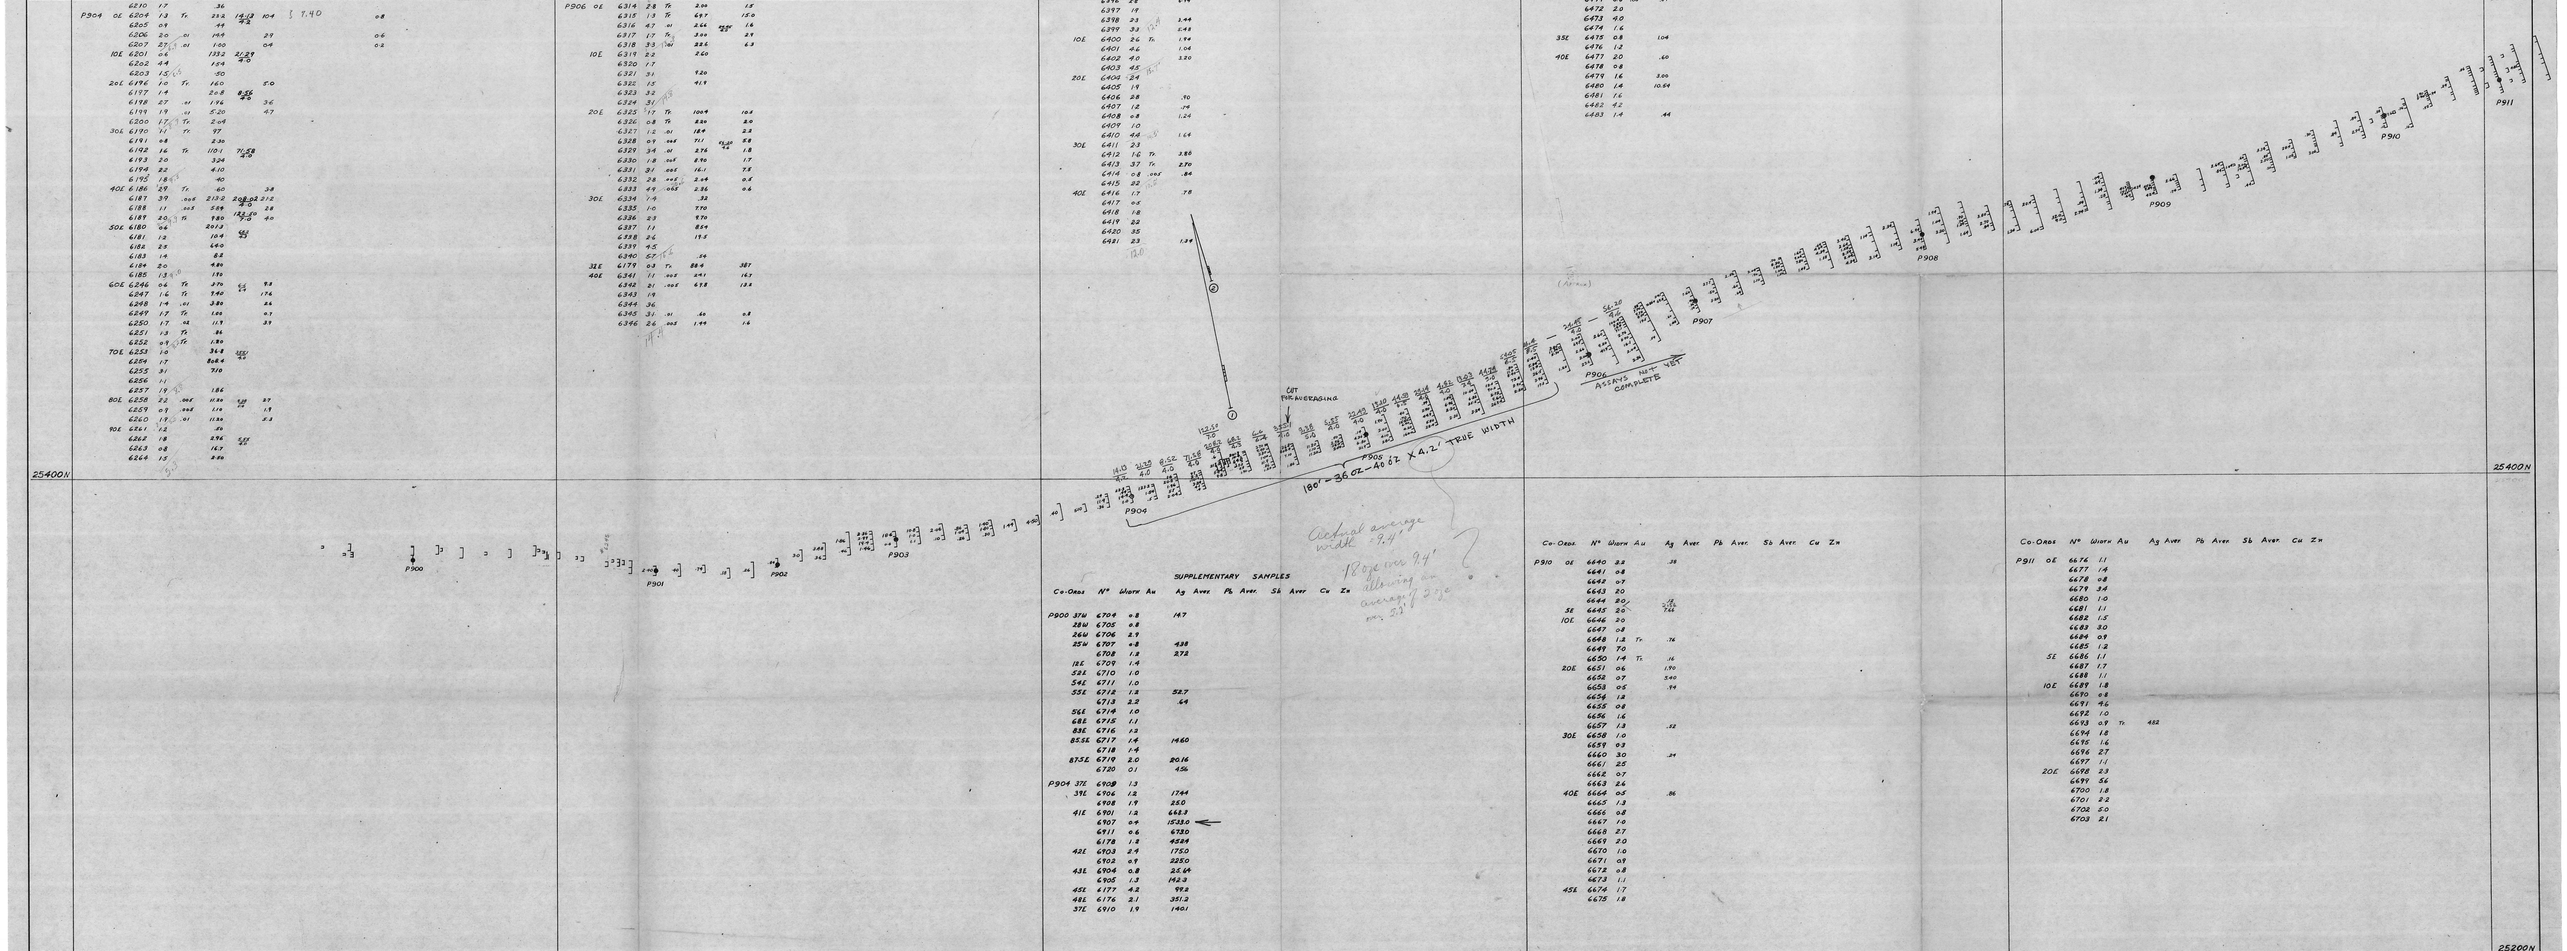

SUPPLEMENTARY SAMPLES

Co-Ords	Nº	Width	Au	Ag Aver.	Pb Aver.	Sb Aver.	Cu	Zn
P900 37W	6704	0.8		147				
28W	6705	0.8						
26W	6706	2.3						
25W	6707	0.8		438				
	6708	1.3		272				
12E	6709	1.4						
52E	6710	1.0						
54E	6711	1.0						
55E	6712	1.2		527				
	6713	2.2		64				
56E	6714	1.0						
68E	6715	1.1						
83E	6716	1.2						
85.5E	6717	1.4		1460				
	6718	1.4						
87.5E	6719	2.0		2016				
	6720	0.1		456				
P904 37E	6708	1.3						
39E	6906	1.2		1764				
	6908	1.7		250				
41E	6901	1.2		668.3				
	6907	0.4		15330				
	6711	0.6		6720				
	6178	1.2		4584				
42E	6903	2.4		1750				
	6902	0.7		2250				
43E	6904	0.8		2564				
	6905	1.3		142.3				
45E	6177	4.2		9.2				
48E	6176	2.1		351.2				
37E	6910	1.9		1401				

Actual average width = 7.2'
180' over 9.4' allowing an average of 2.2 oz. Ag

PESO SILVER MINES LTD (NPL)
Mayo Yukon

ASSAY PLAN - REX VEIN

SCALE: 1 in. = 20 ft. | 21 Sept. 1962 | DRAWN: (illegible) | 006061

This reference could be reproduced on a stable material. Scale of reproduction will be the same as the image. Reference to the original plan should be made to the original date.