

To: Mr. P. Sawyer

REPORT No A25 - 717

PAGE No. 1

BONDAR-CLEGG & COMPANY LTD.

DATE: September 17, 1975

1 - 425 Howe Street
Vancouver, B.C.

008817

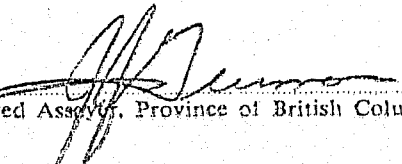
CERTIFICATE OF ASSAY

Samples submitted: September 12, 1975
Results completed: September 17, 1975

I hereby certify that the following are the results of assays made by us upon the herein described core samples.

MARKED	GOLD		SILVER	Cu	Zn						TOTAL VALUE PER TON (2000 LBS.)
	Ounces per Ton	Value per Ton	Ounces per Ton	Percent	Percent	Percent	Percent	Percent	Percent		
32802			0.05	0.11	0.25						
32806			0.04	0.06	0.05						
32811			0.50	0.90	0.65						
32818			0.11	0.38	0.65						
32822			0.04	0.11	0.20						
32823			0.04	0.19	0.05						
32825			0.35	0.85	0.10						
32836			0.14	0.48	0.05						

*Check assays by Bondar Clegg on rejects from drill core samples from
Hal claims drill hole 75-1.*


Registered Assayer, Province of British Columbia

DATE. SEPTEMBER 16, 1975

FILE NO. 9280- 34

Addendum

ASSAY CERTIFICATE

WHITEHORSE ASSAY OFFICE LTD.
BOX 4518 WHITEHORSE Y. T.
PHONE 667 2694 Y1A 2R8

SAMPLE RECEIVED FROM

NORTHERN HOMESTAKE MINES

SAMPLE NO.	GOLD Oz. Per Ton	SILVER Oz. Per Ton	TUNGSTEN WO ₃					
32845			.025					
32861			.025					
32864			.015					
32865			.015					
32866			.015					
32867			.025					

ASSAYER.

A. Hayward

GEO. SPALDING

ASSAY TAG #	D.D.H.	FOOTAGE	Width	Cu	Pb	Zn	WO ₃	Au	Ag	Mn	P.O. NBR
2843	DDH 75-3	116.5-120.0	4.5	0.42	0.01	0.96					
2873		120.0-125.0	5.0	0.04	0.03	0.01				0.03	
2874		125.0-128.1	3.1	0.04	0.01	0.01				0.02	
2844		128.1-133.1	5.0	0.08	0.01	0.01					
2845		133.1-138.2	5.1	0.68	0.01	0.05	0.025				
2846		138.2-141.0	2.8	0.40	0.01	0.05					
2847		141.0-145.7	4.7	0.49	0.01	0.05					
2848		145.7-149.3	3.6	0.09	0.01	0.05					
2849		149.3-152.9	3.6	0.38	0.01	0.27					
2850		152.9-154.3	1.5	0.75	0.01	0.23					
2851		154.3-156.2	1.9	0.46	0.01	0.19					
2852		156.2-158.7	2.5	0.68	0.01	0.77					
2853		158.7-163.0	4.3	1.03	0.07	1.94					
2854		163.0-168.0	5.0	0.35	0.01	1.00					
2855		168.0-171.1	3.1	0.60	0.01	0.25					
2856		171.1-175.0	4.9	0.28	0.01	0.01					
2857		175.0-177.6	2.6	0.55	0.01	1.42					
2858		177.6-178.8	1.2	0.08	0.01	0.01					
2859		178.8-180.2	1.4	0.32	0.01	0.05					
2860		180.2-181.8	1.6	0.21	0.01	0.02					
2861		181.8-185.0	3.2	0.30	0.01	0.02	0.025				
2862		185.0-189.0	4.0	0.41	0.01	0.05					
2863		189.0-194.0	5.0	0.10	0.01	0.01					
2864		194.0-199.0	5.0	0.14	0.01	0.02	0.025				
2865		199.0-205.3	6.3	0.60	0.01	0.02	0.025				
2866		205.3-210.3	5.0	0.38	0.01	0.01	0.025				
2867		210.3-211.7	1.4	0.58	0.01	0.08	0.025				
2868		211.7-216.0	4.3	0.11	0.03	0.01					
2869		216.0-221.0	5.0	0.23	0.01	1.34					
2870		221.0-226.0	5.0	0.16	0.08	2.76					
2871		226.0-229.0	3.0	0.24	0.01	3.66					
2872		229.0-231.0	2.0	0.10	0.03	0.01					
2875		@ 249'	(For Mn.)	0.04	0.01	0.01				0.06	
AVERAGES:											
		133.1-145.7	12.6	0.55							
		133.1-177.6	44.5	0.52							
		178.8-189.0	10.2	0.33							
		199.0-211.7	12.7	0.51							
		116.5-231.0	114.5	0.35							
		156.2-168.0	11.8			1.29					
		216.0-229.0	13.0			2.42					

