


CONTOUR INTERVAL 20 GAMMA
 MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD) 100 FEET
 500 GAMMA CONTOUR 100 FEET
 100 GAMMA CONTOUR 100 FEET
 20 GAMMA CONTOUR 100 FEET
 MAGNETIC LOW 1000 O
 FIDUCIAL POINTS 1000 O
 FLIGHT LINES 1000 O

MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD) 100 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc.
 FIDUCIAL POINTS 1000 O
 FLIGHT LINES 1000 O
 The contours represent amplitude of in phase response of the
 resultant field expressed in parts per million of the primary.
 The figures (5) represent amplitude of in phase component
 The frequency of the primary current is 4000 cycles per second

TAY RIVER AREA
 YUKON TERRITORY

SCALE - 1 Inch to 1320 Feet

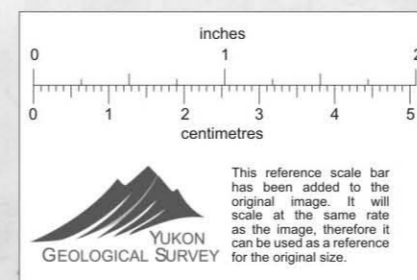

Flown and Compiled
 for
 DYNASTY EXPLORATION LIMITED
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

010301

