


CONTOUR INTERVAL ..... 20 GAMMA  
 MEAN FLIGHT LINE SPACING ..... 1000 FEET  
 MEAN TERRAIN CLEARANCE (IBRD) ..... 100 FEET  
 500 GAMMA CONTOUR .....  
 100 GAMMA CONTOUR .....  
 20 GAMMA CONTOUR .....  
 MAGNETIC LOW .....  
 FIDUCIAL POINTS .....  
 FLIGHT LINES .....

MEAN FLIGHT LINE SPACING ..... 1000 FEET  
 MEAN TERRAIN CLEARANCE (IBRD) ..... 100 FEET  
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc .....  
 FIDUCIAL POINTS .....  
 FLIGHT LINES .....  
 The contours represent amplitude of in phase response of the  
 resultant field expressed in parts per million of the primary  
 The figure (5) represent amplitude in phase component  
 The frequency of the primary current is 4000 cycles per second.

TAY RIVER AREA  
YUKON TERRITORY

010302

SCALE - 1 inch to 1320 Feet

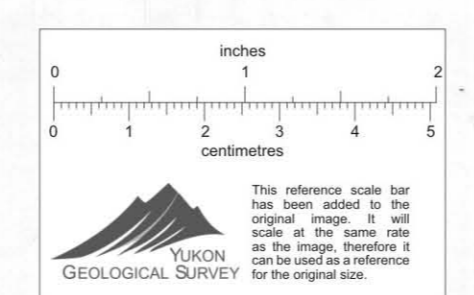

Flown and Compiled  
 for  
 DYNASTY EXPLORATION LIMITED  
 by  
 LOCKWOOD SURVEY CORPORATION LIMITED  
 TORONTO, CANADA  
 1965

