


CONTOUR INTERVAL 20 GAMMA
 MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD) 100 FEET
 500 GAMMA CONTOUR 100 FEET
 20 GAMMA CONTOUR
 MAGNETIC LOW
 FLIGHT LINES

MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD) 100 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15, etc.
 1, 2, 3, 4, etc.
 FIDUCIAL POINTS
 FLIGHT LINES
 The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary.
 The figures (5) represent amplitude in phase component
 The frequency of the primary current is 4000 cycles per second.

TAY RIVER AREA
 YUKON TERRITORY

SCALE - 1 Inch to 1320 Feet

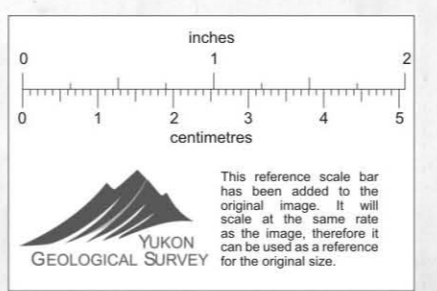

Flown and Compiled
 for
 DYNASTY EXPLORATION LIMITED 010305
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

