


CONTOUR INTERVAL 20 GAMMA
 MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD) 100 FEET
 500 GAMMA CONTOUR 100 FEET
 100 GAMMA CONTOUR 100 FEET
 20 GAMMA CONTOUR 100 FEET
 MAGNETIC LOW 3490
 FIDUCIAL POINTS 3490
 FLIGHT LINES 3490

MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD) 100 FEET
 ELECTROMAGNETIC CONTOURS (5, 10, 15 etc.) 100 FEET
 FIDUCIAL POINTS 3490
 FLIGHT LINES 3490

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary in phase component.
 The figures represent amplitude in phase component.
 The frequency of the primary current is 4000 cycles per second.

TAY RIVER AREA
YUKON TERRITORY

SCALE - 1 inch to 1520 Feet

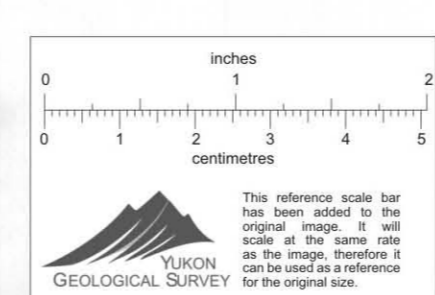

010312

Flown and Compiled
 for
 DYNASTY EXPLORATION LIMITED
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

