


DYNASTY EXPLORATION LIMITED
 AIRBORNE ELECTROMAGNETIC SURVEY

HF 6-185

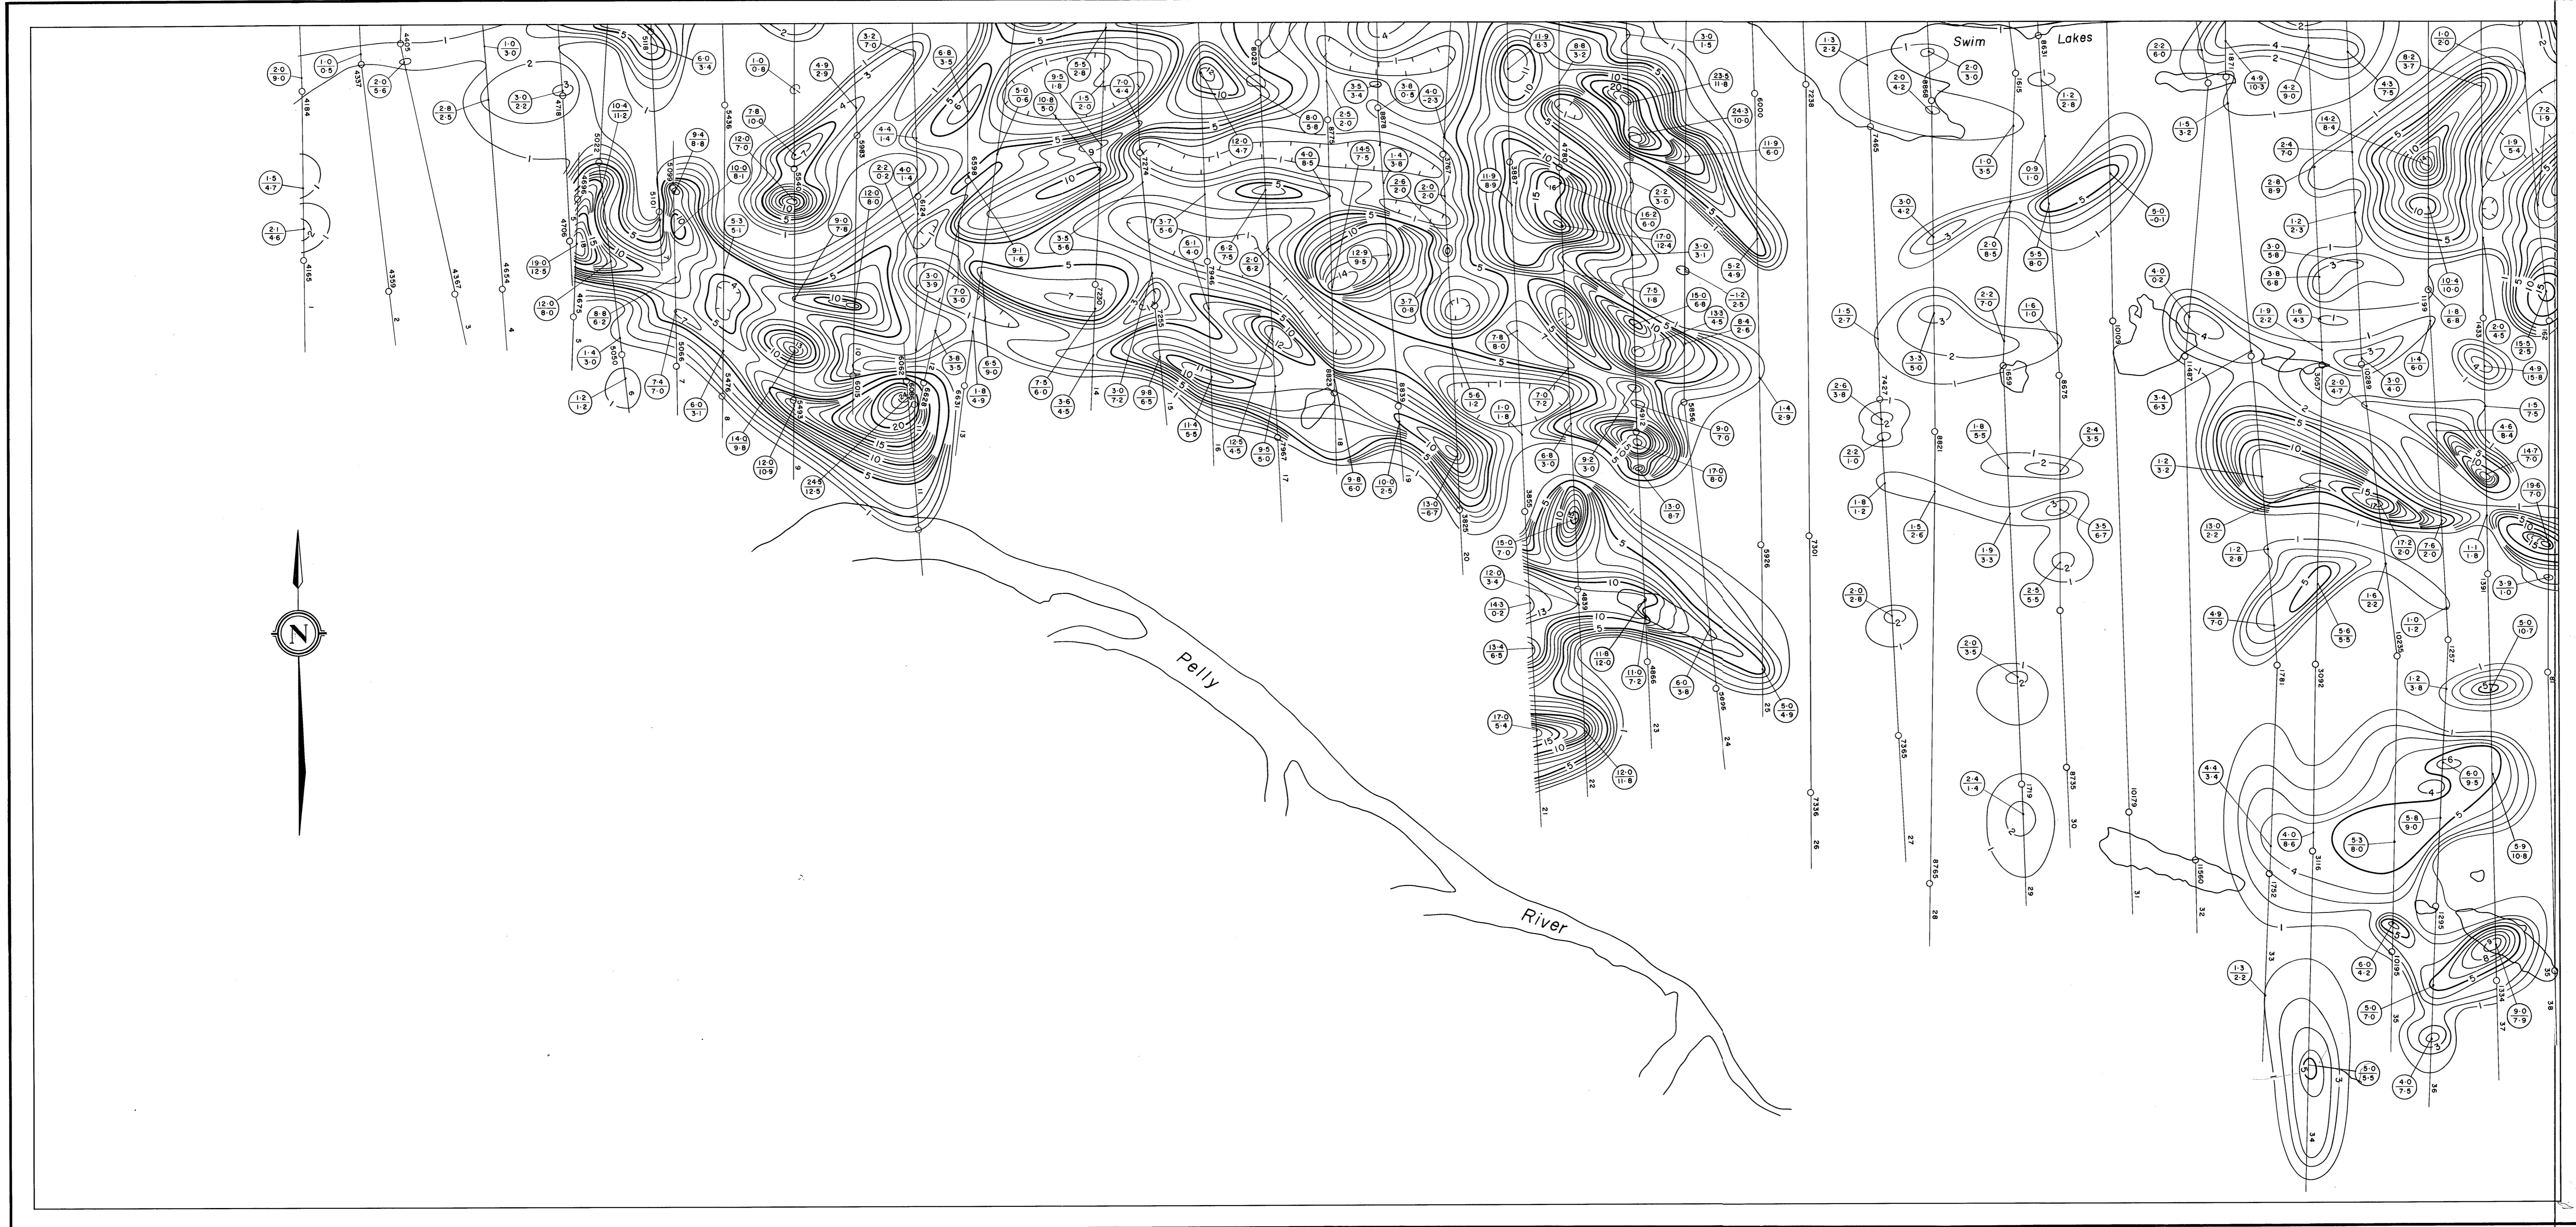


MEAN FLIGHT LINE SPACING ----- 1000 FEET
 MEAN TERRAIN CLEARANCE ----- 200 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc. -----
 1, 2, 3, 4 etc. -----
 FIDUCIAL POINTS ----- O 3690
 FLIGHT LINES -----

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary
 The figures $\frac{a}{b}$ represent amplitude in phase component
 quadrature component
 The frequency of the primary current is 4000 cycles per second.

BLIND CREEK AREA
 YUKON TERRITORY

SCALE
 1000 0 1000 2000 3000 4000 5000
 FEET FEET FEET FEET FEET
 1 Inch to 1320 Feet

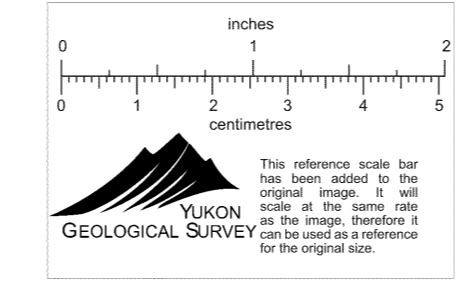

Flown and Compiled
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

010324
 ELX-77

