

CONTOUR INTERVAL 20 GAMMA
 MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRL) 100 FEET
 500 GAMMA CONTOUR 500
 100 GAMMA CONTOUR 100
 20 GAMMA CONTOUR 20
 MAGNETIC LOW 0
 FIDUCIAL POINTS 0
 FLIGHT LINES 0


MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRL) 100 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc. 5, 10, 15 etc.
 FIDUCIAL POINTS 0
 FLIGHT LINES 0

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary in phase component
 The figures represent amplitude in phase component
 The frequency of the primary current is 4000 cycles per second.

TAY RIVER AREA YUKON TERRITORY

010332

SCALE - 1 Inch to 1320 Feet

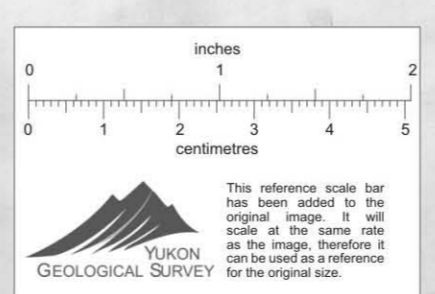

Flown and Compiled for
 DYNASTY EXPLORATION LIMITED
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

