


CONTOUR INTERVAL..... 20 GAMMA
 MEAN FLIGHT LINE SPACING..... 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD)..... 100 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc..... 100 FEET
 500 GAMMA CONTOUR.....
 100 GAMMA CONTOUR.....
 20 GAMMA CONTOUR.....
 MAGNETIC LOW.....
 FIDUCIAL POINTS..... 3490
 FLIGHT LINES.....

MEAN FLIGHT LINE SPACING..... 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD)..... 100 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc..... 100 FEET
 FIDUCIAL POINTS..... 3490
 FLIGHT LINES.....
 The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary.
 The figures (5) represent amplitude of in phase component.
 The frequency of the primary current is 4000 cycles per second.

TAY RIVER AREA
YUKON TERRITORY

010333

SCALE - 1 Inch to 1320 Feet

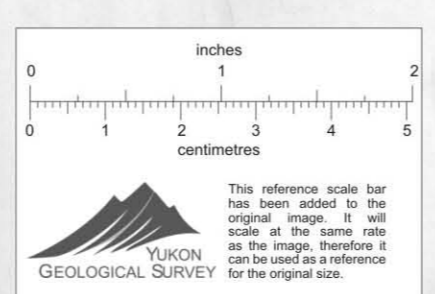

Flown and Compiled
 for
 DYNASTY EXPLORATION LIMITED
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

