


CONTOUR INTERVAL..... 20 GAMMA
 MEAN FLIGHT LINE SPACING..... 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD)..... 100 FEET
 500 GAMMA CONTOUR..... 100 FEET
 100 GAMMA CONTOUR..... 100 FEET
 20 GAMMA CONTOUR..... 100 FEET
 MAGNETIC LOW..... 100 FEET
 FIDUCIAL POINTS..... 3890 O
 FLIGHT LINES..... 3890 O

MEAN FLIGHT LINE SPACING..... 1000 FEET
 MEAN TERRAIN CLEARANCE (BIRD)..... 100 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc..... 100 FEET
 1, 2, 3, 4, etc..... 100 FEET
 FIDUCIAL POINTS..... 3890 O
 FLIGHT LINES..... 3890 O

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary.
 The figures (5) represent amplitude in phase component quadrature component.
 The frequency of the primary current is 4000 cycles per second.

TAY RIVER AREA
YUKON TERRITORY
 SCALE - 1 inch to 1320 Feet

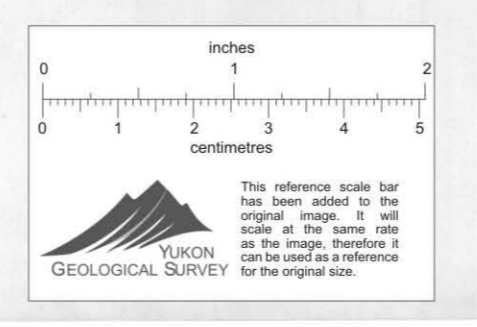

Flown and Compiled for
 DYNASTY EXPLORATION LIMITED
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

010405

