


MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE 200 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc. 1, 2, 3, 4 etc.
 FIDUCIAL POINTS 03690
 FLIGHT LINES 0

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary
 The figures (5) represent amplitude in phase component
 The frequency of the primary current is 4000 cycles per second


ROSE CREEK AREA
 YUKON TERRITORY

SCALE
 2000 0 2000 4000 6000 8000 10000
 FEET FEET FEET FEET FEET
 1 inch to 2640 Feet

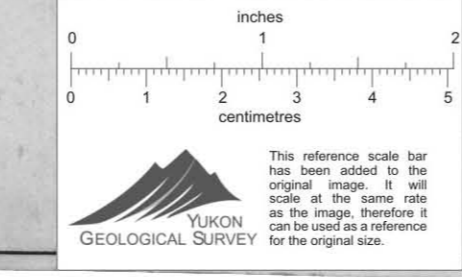

010670

Flown and Compiled
 by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1965

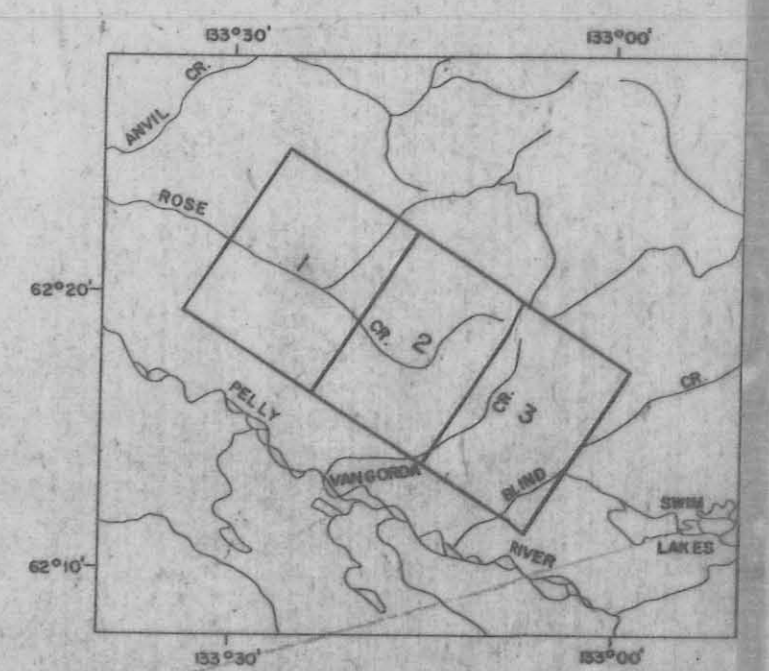

WX-37

1965-X-116
 FARO
 Rose Creek Area
 WX-37
 map