


EXISTING MAPPING BY  
MCELHANEY SURVEYING &  
ENGINEERING LTD.

LEGEND  
MEAN FLIGHT LINE SPACING ..... 1000 FEET  
MEAN TERRAIN CLEARANCE ..... 200 FEET  
ELECTROMAGNETIC CONTOURS 1, 2, 3, 4 MHz

The contours represent amplitude of phase response of the resultant field expressed in parts per million of the primary.  
The figures (22) represent amplitude coordinates (100000000).  
The frequency of the primary current is 4000 cycles per second.

NOTE: Film and compiled by LOCKWOOD SURVEY CORPORATION LIMITED TORONTO CANADA  
1965, at 1" = 1000'  
DATA: Entered 1" = 1000' and plotted onto topographic maps by correction of planimetric errors by S. K. SUZUKI  
May 24, 1977

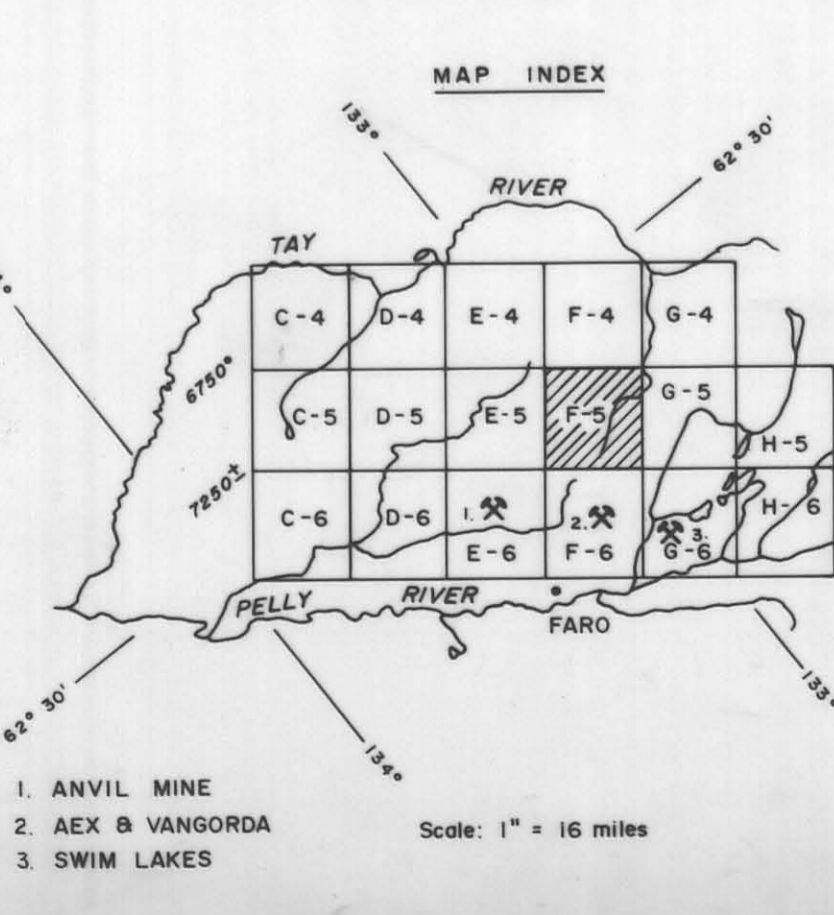

- ALL WEATHER ROADS
- SECONDARY ROADS
- TUTE TRAILS
- BRIDGES
- PRIMARY STREAMS
- SECONDARY STREAMS
- SWAMPS
- CAMP LOCATIONS
- DIAMOND D.H. SITES
- ROTARY DRILL SITES
- TRIANGULATION STATIONS
- SPOT ELEVATION IN FEET

**CYPRUS ANVIL MINING CORPORATION**

**AIRBORNE E. M. SURVEY**

REVISED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

Scale: 1" = 1000'

N.T.S. 1054-6311  
DRAWN BY: C.L.C.  
DATE: \_\_\_\_\_

011193