
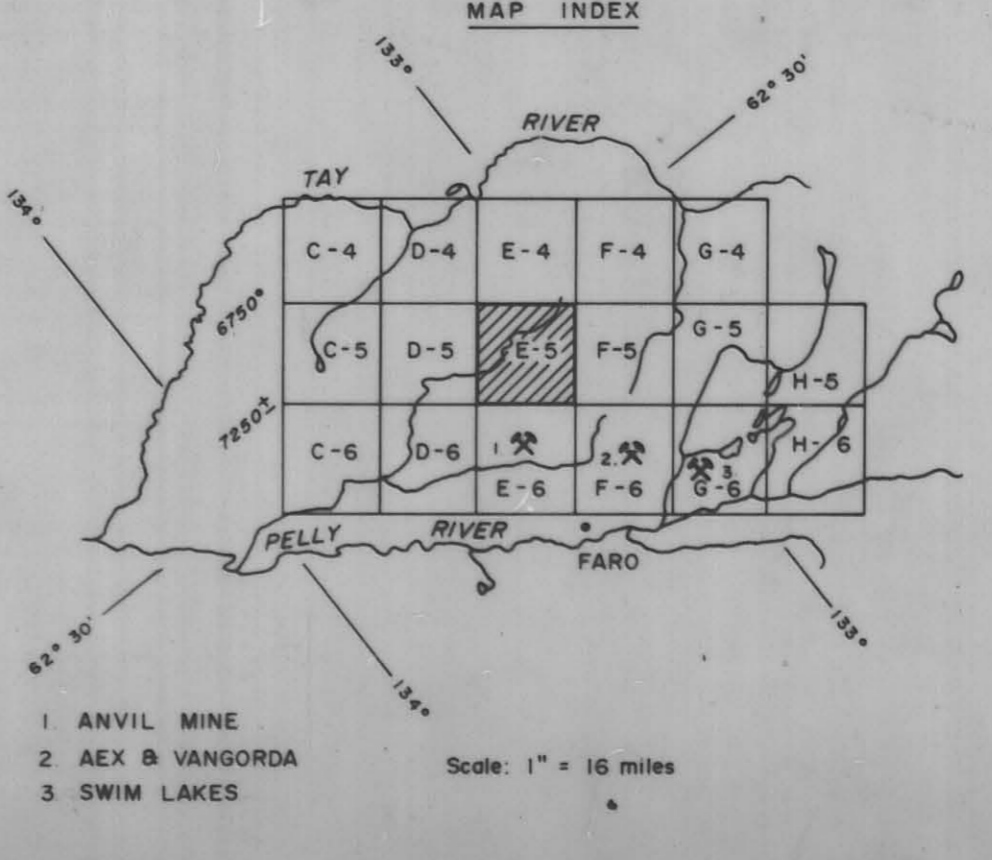


EXISTING MAPPING BY
MCELHANEY SURVEYING &
ENGINEERING LTD.

LEGEND
 MEAN FLIGHT LINE SPACING 1000 FEET
 MEAN TERRAIN CLEARANCE 200 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15, 20 etc.
 1, 2, 3, 4 etc.

The contours represent amplitude of in phase response of the resultant field measured in volts per meter of the primary phase component.
 The figures (10) represent amplitude of the secondary phase component.
 The frequency of the primary current is 4000 cycles per second.

NOTE: Flown and compiled by LOCKWOOD SURVEY CORPORATION LIMITED TORONTO CANADA 1965, at 1"=1500
 DATA: Extended 1"=1000' and plotted onto topographic map by correction of planimetric details by S. K. BUZIK May 24, 1977.

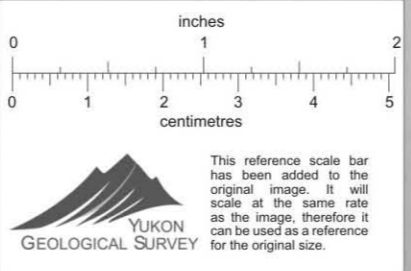

- ALL WEATHER ROADS
- SECONDARY ROADS
- TOTE TRAILS
- BRIDGES
- PRIMARY STREAMS
- SECONDARY STREAMS
- SWAMPS
- CAMP LOCATIONS
- DIAMOND D.H. SITES
- ROTARY DRILL SITES
- TRIANGULATION STATIONS
- SPOT ELEVATION IN FEET

CYPRUS ANVIL MINING CORPORATION

AIRBORNE E. M. SURVEY

REVISED BY: _____ N.T.S. 100K-8
 DRAWN BY: C. L. C. DATE: _____
 011235 Scale 1" = 1000'