
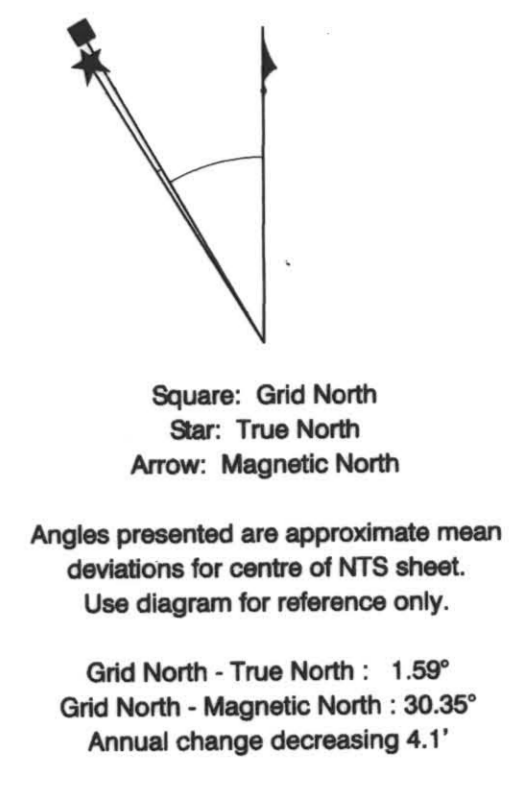


Faro Aerodat 04/96  
 105/K/5,6  
 Scale 1:24,000  
 Vertical Magnetic Gradient

D6  
 1-4

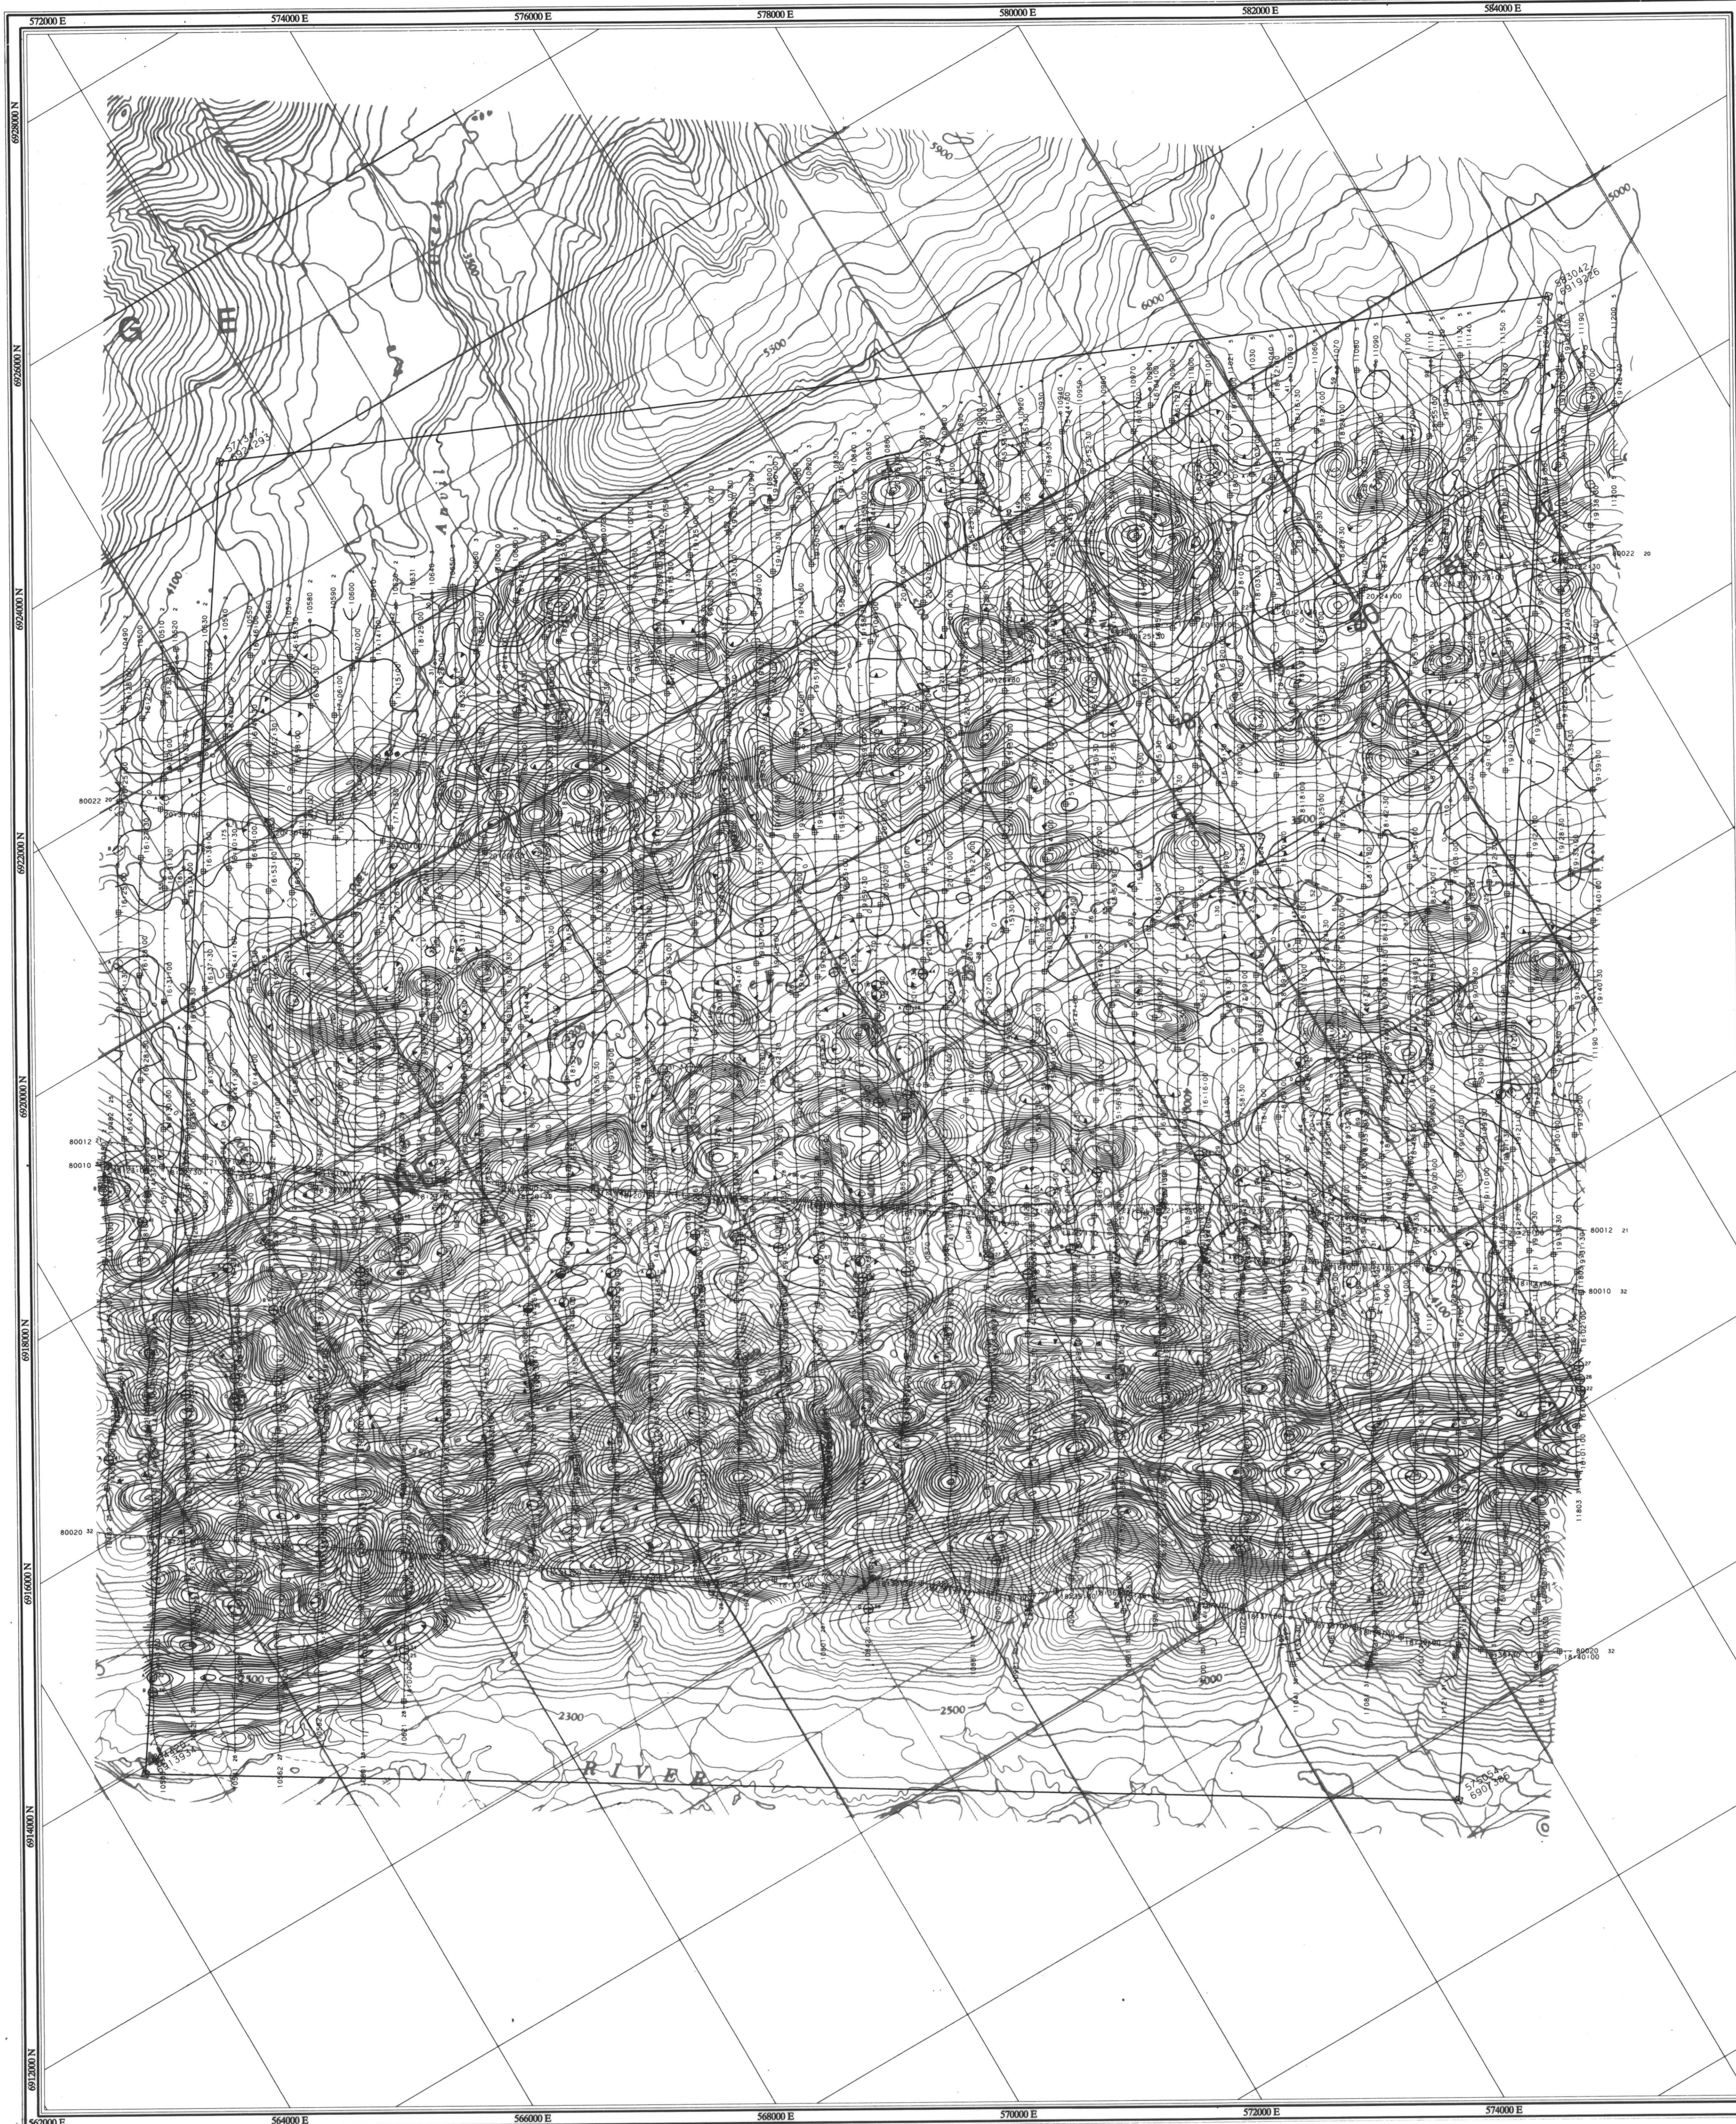

**VERTICAL GRADIENT**

Vertical magnetic gradient contour data, calculated from the gridded total magnetic intensity data by an 17x17 convolution operator.

Map contours are in nanoTeslas/metre, and are multiples of those listed below:

- 0.05 nT/m
- 0.25 nT/m
- 1.0 nT/m
- 5.0 nT/m
- 25.0 nT/m

**FLIGHT PATH**

Navigation and flight path recovery was conducted using a Global Positioning System (GPS) satellite navigation system.

Lines were flown at an azimuth of 30 - 210°, with an average line spacing of 200m.

Average helicopter-terrain clearance of 60m was monitored by radar and barometric altimeters.



**EM ANOMALIES**

EM anomalies selected by computer algorithm and manually confirmed. Selection is based on the response correlation to theoretical sources such as a steeply dipping conductor.

Calculation of conductance is based on the response of the 4600 Hz coaxial data, and forms the basis for anomaly classification.

Letter codes are used to identify individual anomalies on a line, and the inphase amplitude of the 4600 Hz response is annotated opposite.

- 0 - 1 mhos
- 1 - 2 mhos
- 2 - 4 mhos
- 4 - 8 mhos
- 8 - 16 mhos
- 16 - 32 mhos
- > 32 mhos

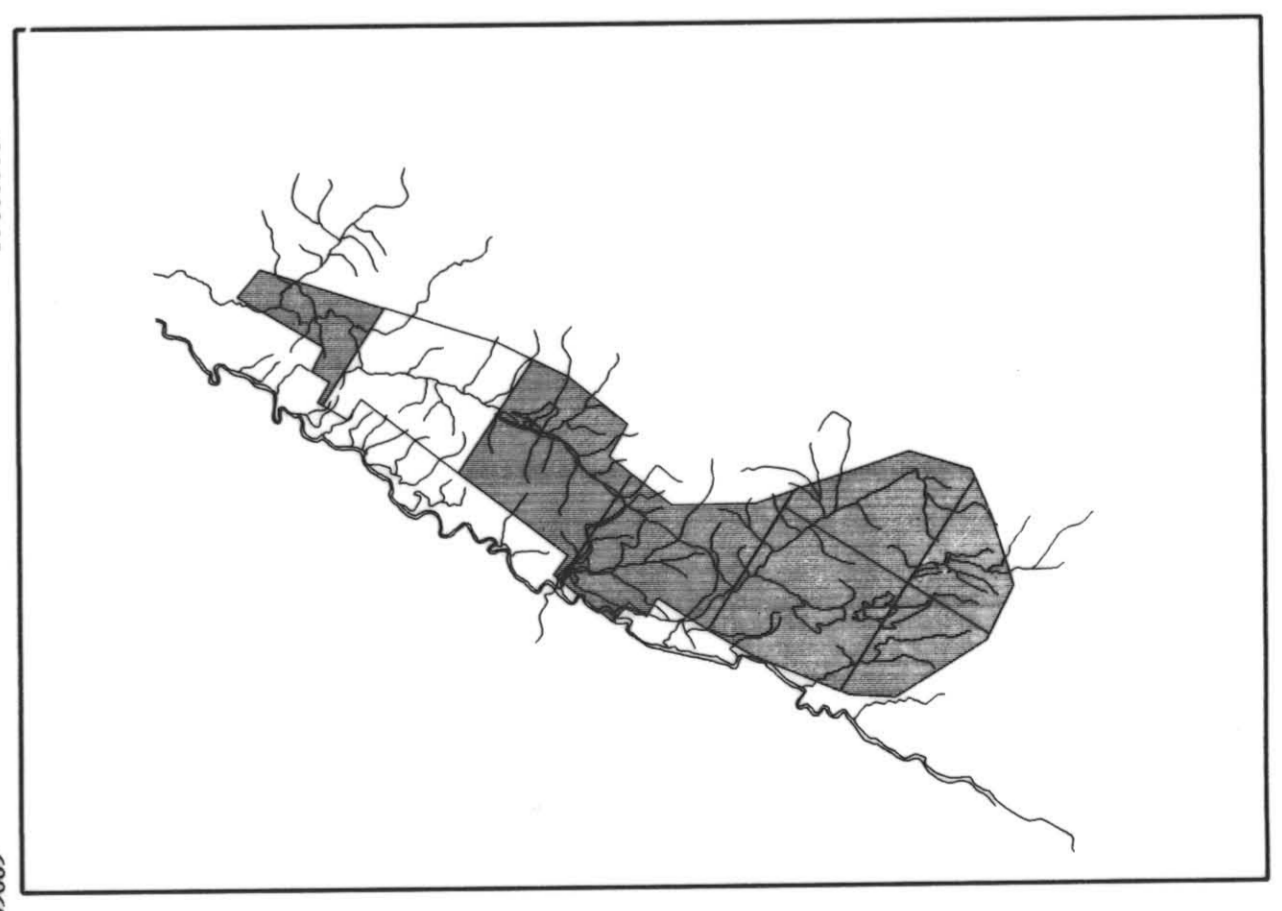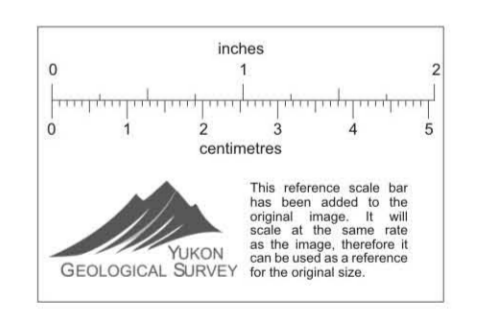

**ANVIL RANGE MINING CORPORATION**

**VERTICAL MAGNETIC GRADIENT**

**FARO, D6**  
 YUKON

011406

SCALE 1:24 000

500 0 100 200 300 400 500 2000 metres

**aerodat**  
 AERODAT INC.

Date Flown : JUNE - JULY 1996  
 NTS : 105/K/5,6  
 Project : J9650 Map Ref : 1 - 4