
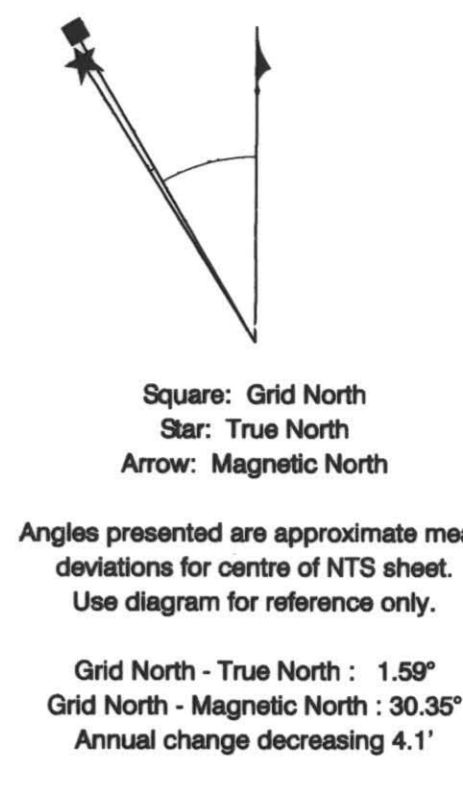


Foro Aerodat 04/96
 105/K/2.3.6.7
 Scale 1:24,000
 Apparent Resistivity Coplanar

G16
 1-5

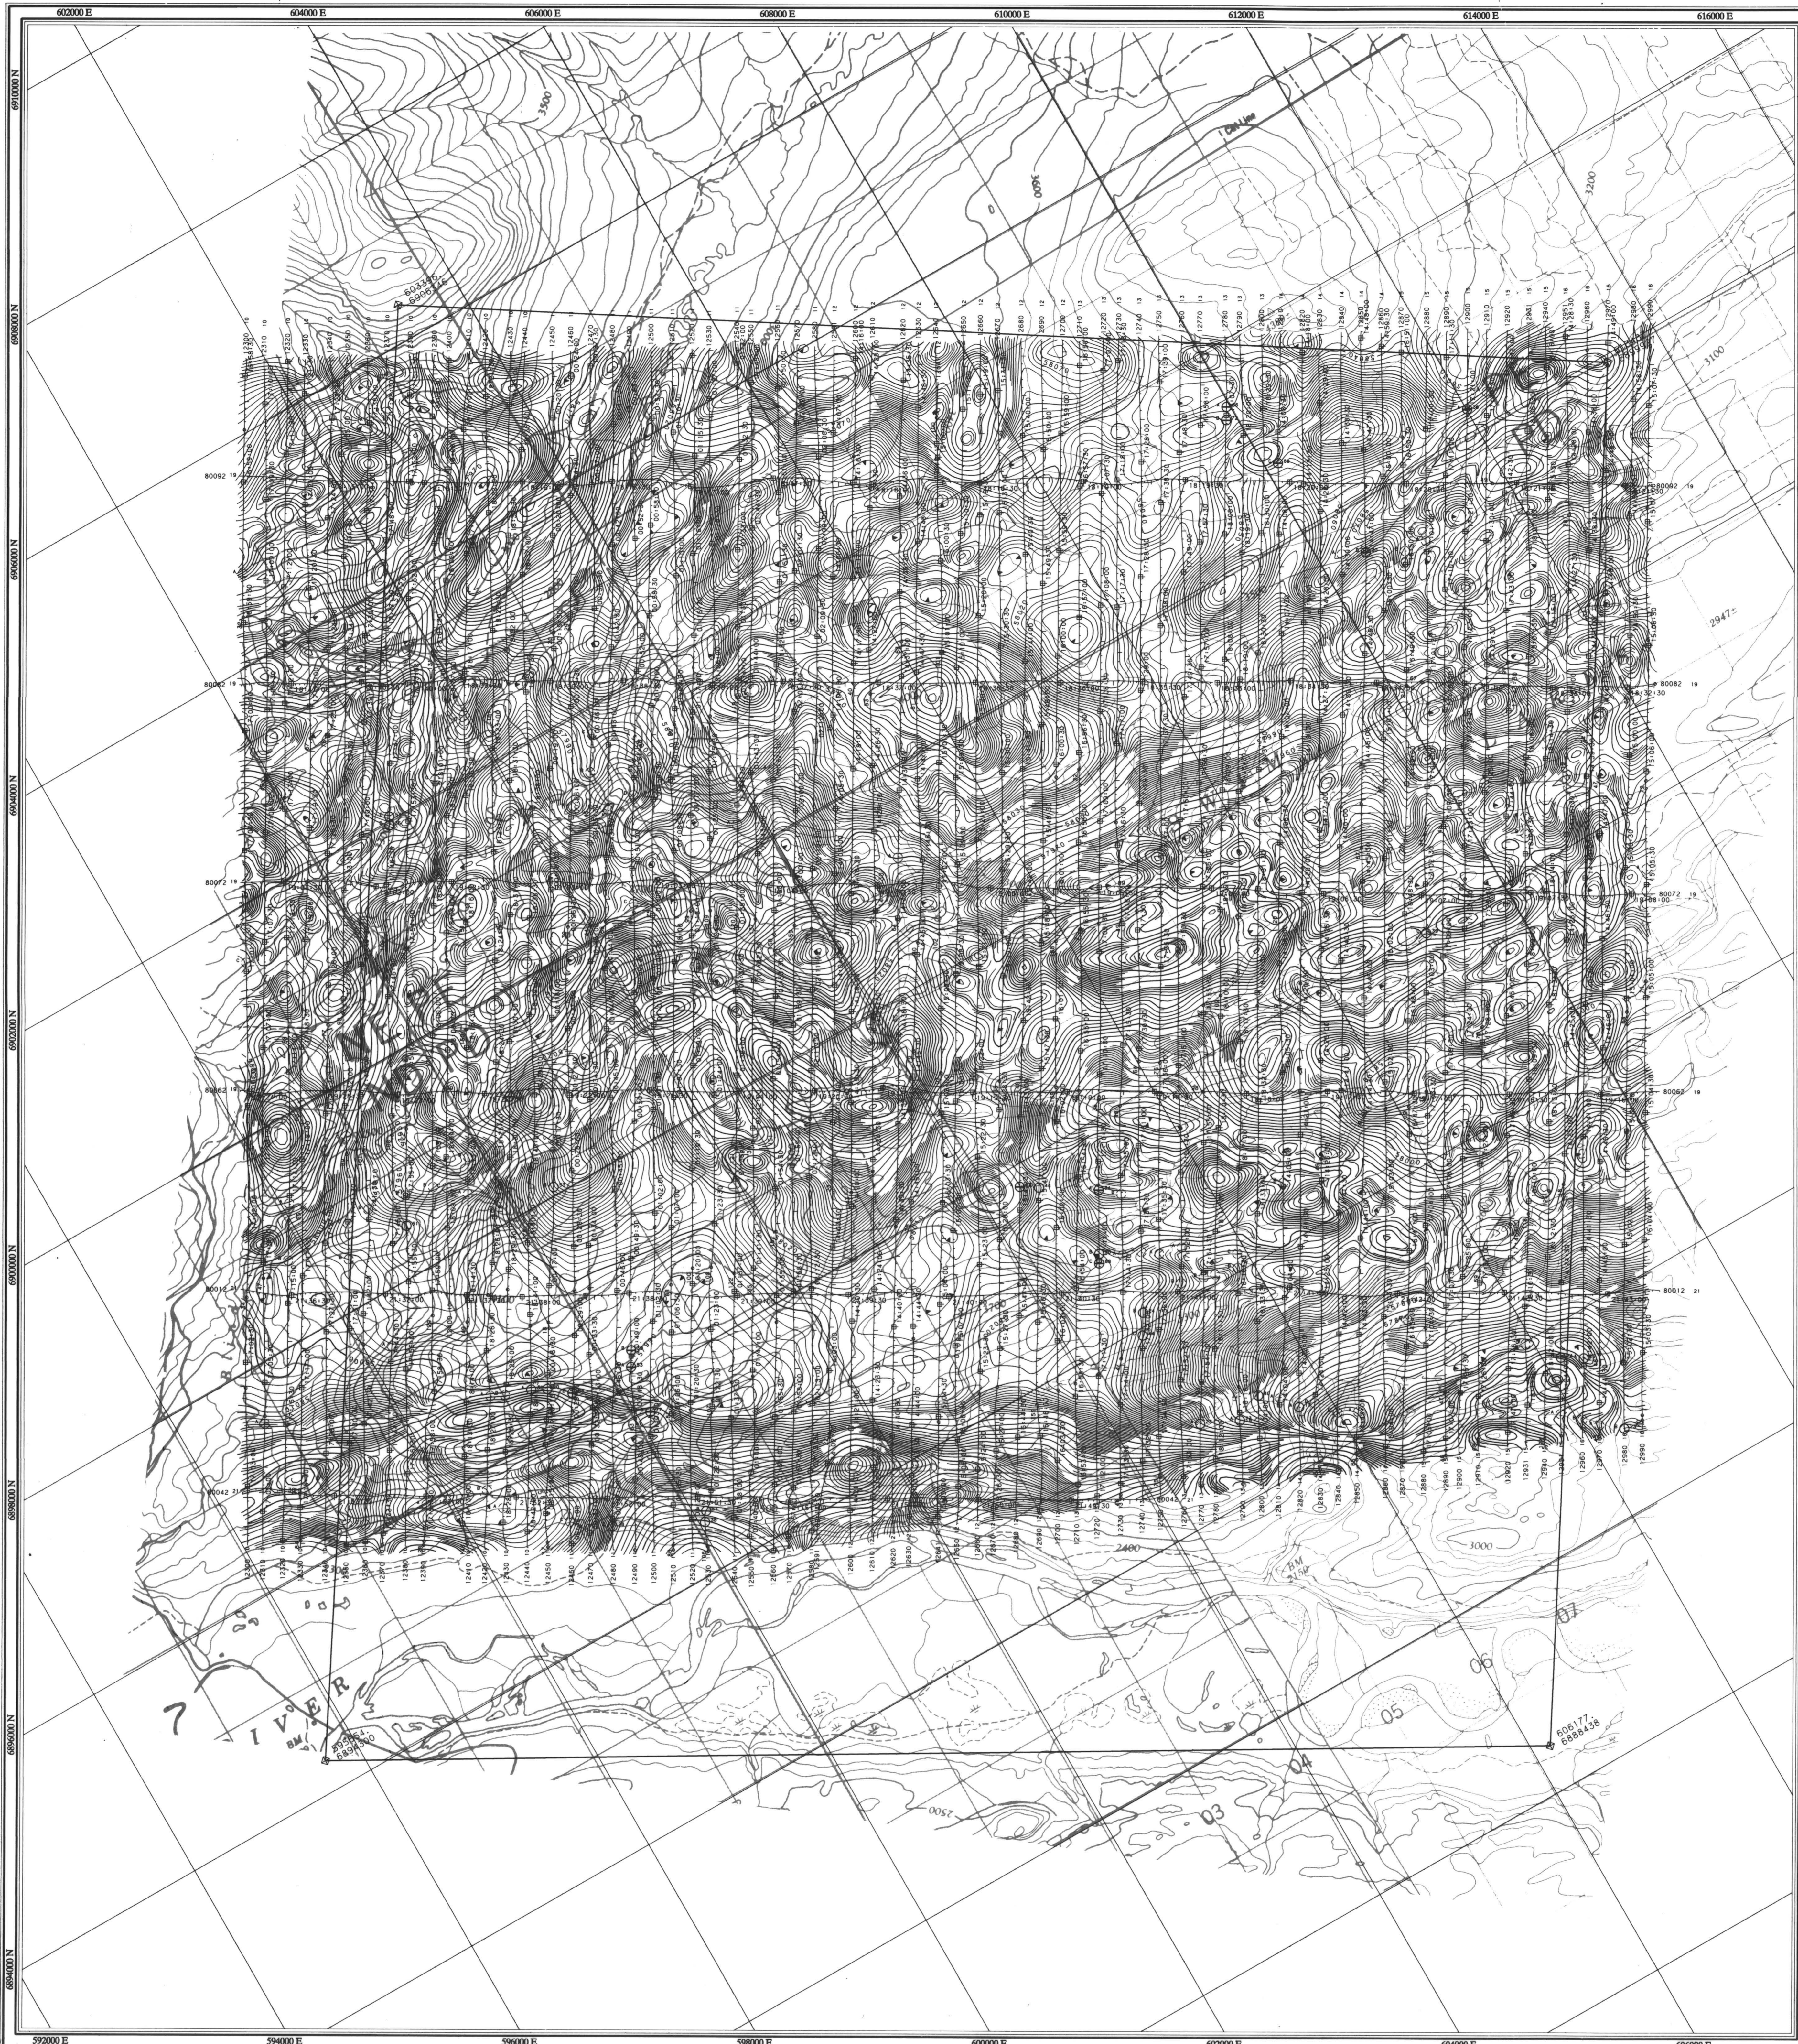

TOTAL MAGNETIC INTENSITY

Total magnetic intensity contour data, measured by a caesium high sensitivity magnetometer at an average sensor elevation of 45m, and corrected for diurnal variation.

Map contours are in nanoTeslas, and are multiples of those listed below:

- 2 nT
- 10 nT
- 50 nT
- 250 nT
- 1000 nT

FLIGHT PATH

Navigation and flight path recovery was conducted using a Global Positioning System (GPS) satellite navigation system.

Lines were flown at an azimuth of 30 - 210°, with an average line spacing of 200m.

Average helicopter-terrain clearance of 60m was monitored by radar and barometric altimeters.



EM ANOMALIES

EM anomalies selected by computer algorithm and manually confirmed. Selection is based on the response correlation to theoretical sources such as a steeply dipping conductor.

Calculation of conductance is based on the response of the 4600 Hz coastal data, and forms the basis for anomaly classification.

Letter codes are used to identify individual anomalies on a line, and the inphase amplitude of the 4600 Hz response is annotated opposite.

- 0 - 1 mhos
- 1 - 2 mhos
- 2 - 4 mhos
- 4 - 8 mhos
- 8 - 16 mhos
- 16 - 32 mhos
- > 32 mhos

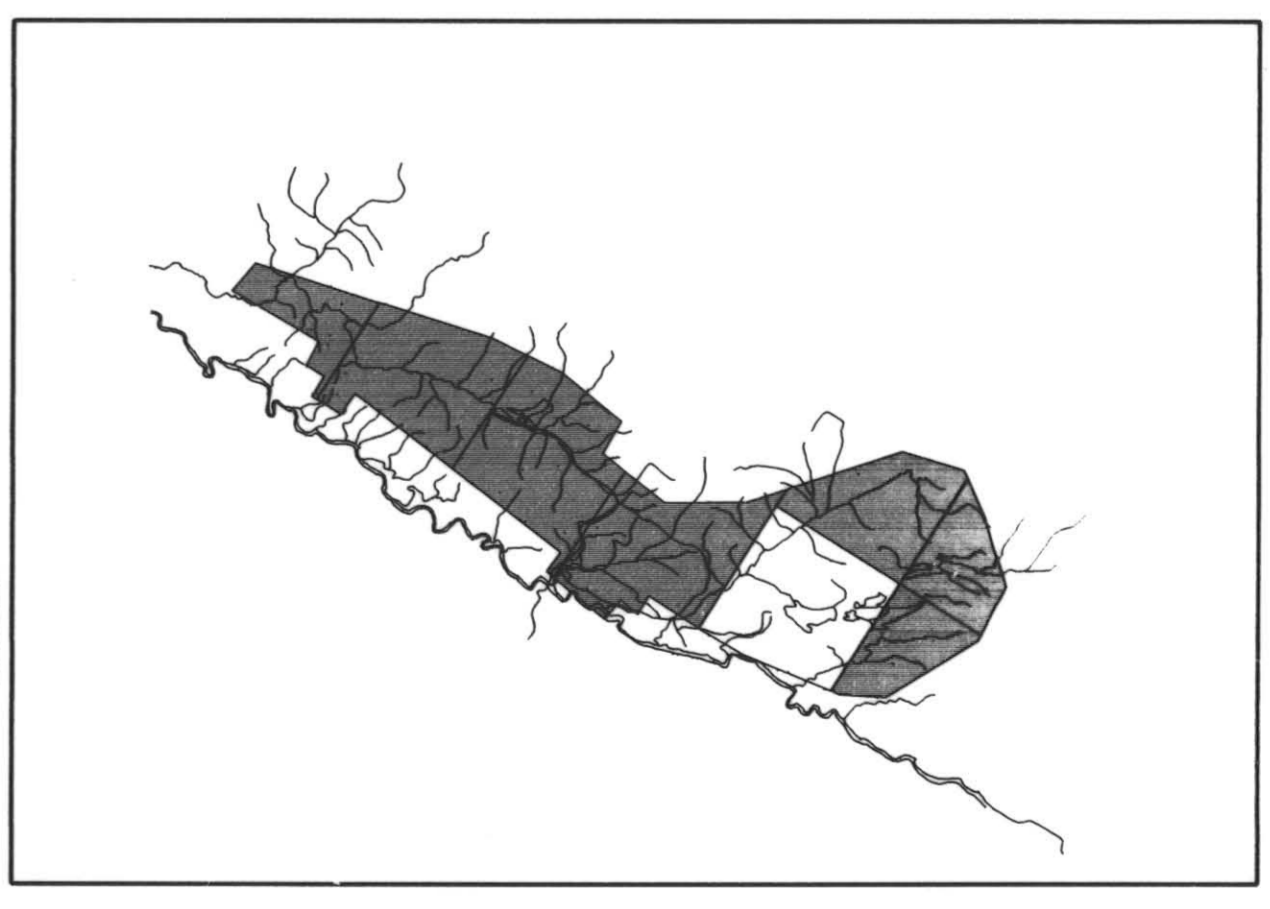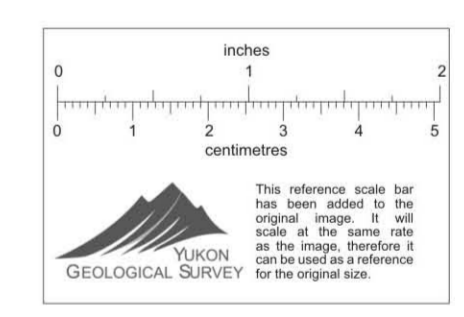

ANVIL RANGE MINING CORPORATION

TOTAL MAGNETIC INTENSITY

FARO, G6
 YUKON 011432

SCALE 1:24 000
 500 0 200 400 800 2500 metres

aerodat Date Flown: JUNE - JULY 1996
 AERODAT INC. NTS: 105/K/2,3,6,7

Project: J0650 Map Ref: 1 - 3