


YUKON COPPER LIMITED
AIRBORNE GEOPHYSICAL SURVEY

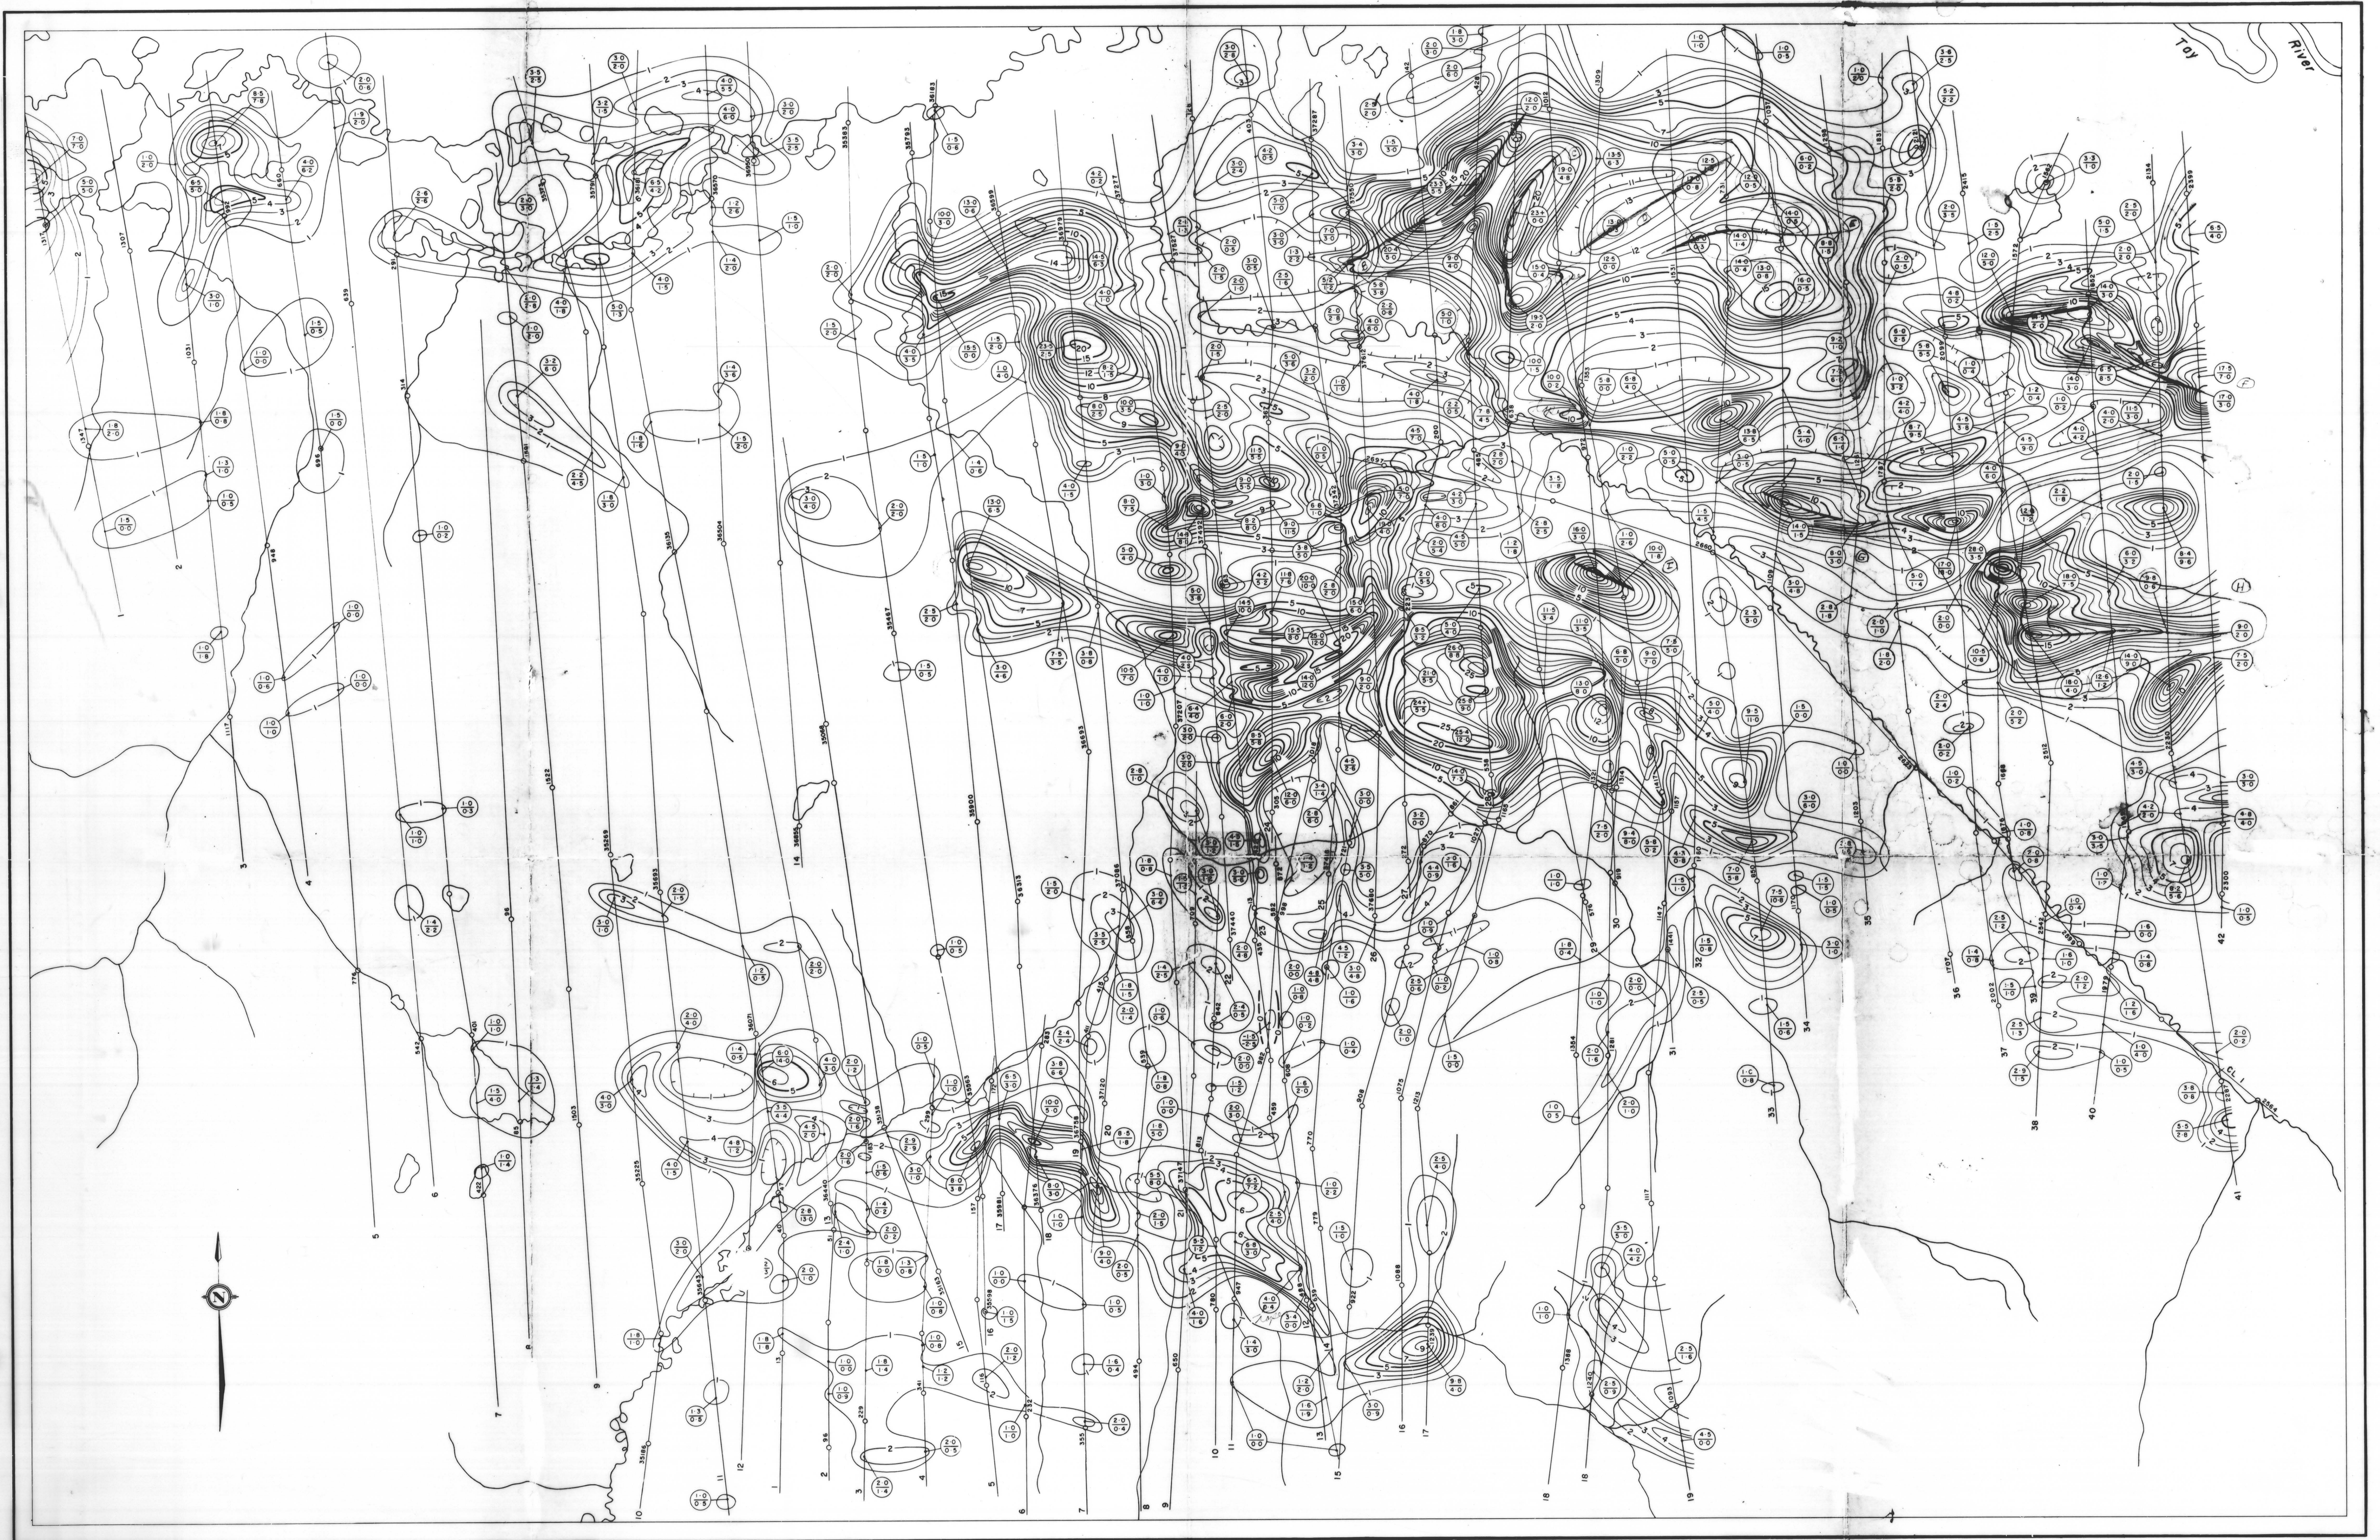


MEAN FLIGHT LINE SPACING..... 1000 FEET
 MEAN TERRAIN CLEARANCE..... 200 FEET
 ELECTROMAGNETIC CONTOURS 5, 10, 15 etc.....
 1, 2, 3, 4 etc.....
 NEGATIVE CONTOURS -5, -10 etc.....
 -1, -2, -3, -4 etc.....
 FIDUCIAL POINTS..... 5490
 FLIGHT LINES.....

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary.
 The figures \odot represent amplitude in phase component
 The frequency of the primary current is 4000 cycles per second.

TARA, DANE, HAL AND MARK GROUPS
YUKON TERRITORY

SCALE
 1000 0 1000 2000 3000 4000 5000
 FEET 1 Inch to 1320 Feet
 (Approx.)

ELECTROMAGNETIC MAP

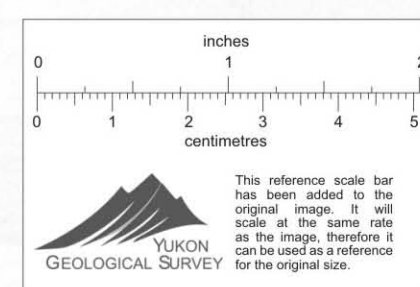

Drawn and Compiled by
 LOCKWOOD SURVEY CORPORATION LIMITED
 TORONTO, CANADA
 1966

