

LEGEND

CHARGEABILITY SCALE 1" = 20 MILLISECOND

ELECTRODE SPACING

- = 400'
- = 200'
- = 100'
- = 50'

NOTES

SEIGEL MK VI INDUCED POLARIZATION DATA
THREE ELECTRODE ARRAY
MOVING CURRENT NORTH OF ARRAY.

RESISTIVITY IN OHM METRES


10000
5000
2000
1000
500
200
100
50
20
10
5
2
1

1" = 200' ELECTRODE SPACING
3 ELECTRODE ARRAY

PLATE 3
CASINO SILVER MINES LIMITED
KATHLEEN LAKE AREA, YUKON TERRITORY
INDUCED POLARIZATION SURVEY
CHARGEABILITY PROFILES
SCALE: 1" = 200'

TO ACCOMPANY A GEOPHYSICAL REPORT
BY J.S. BAIRD DATED OCTOBER 28, 1969

SURVEY BY SEIGEL ASSOCIATES LIMITED
SEPTEMBER 1969

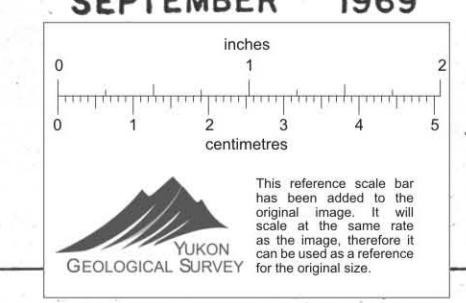

J.S. Baird

012777