NATIONAL TOPOGRAPHIC SERIES — DEPARTMENT OF NATIONAL DEFENCE — FIRST EDITION — CANADA, SHEET 105 K

THE DECLINATION OF THE COMPASS NEEDLE, 1950

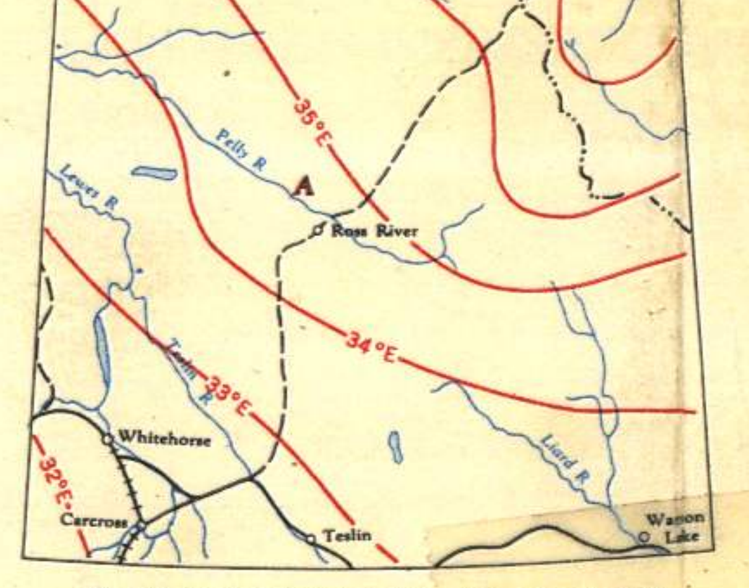

The declination of the compass needle at any place along a red line is the declination given on that red line. At other places the declination is between those given on the neighbouring red line; thus at the place marked A, the declination is between N.34°E. and N.35°E. The easterly declinations of the compass needle are decreasing 4.5 minutes annually.

Surveyed, compiled, drawn and printed by the ARMY SURVEY ESTABLISHMENT R.C.E., 1949-51
Aerial photography by the R.C.A.F. 1949. Published 1951.
Published 1951.

REFERENCE

Road, Hard Surface, All Weather — More than 2 Lanes — Partially Completed
,, Hard Surface, All Weather — 2 Lanes — Route No. 15 — Less than 2 Lanes
,, Loose Surface, All Weather — More than 2 Lanes — 2 Lanes
,, Loose Surface, Less than 2 Lanes — All Weather — Dry Weather
Railway, Multiple Track
,, Single Track
Boundary, International
,, Province or State
,, County or District
,, Reservations, Indian, Military, Park, etc.

Scale 1 : 250,000
Approximately 1 Inch to 4 Miles

Miles 5 0 5 10 15 20 Miles
Kilometres 5 0 5 10 15 20 25 30 Kilometres

inches 0 1 2
0 1 2 3 4 5 centimetres

YUKON GEOLOGICAL SURVEY

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

Contour interval 500 Feet.
All Elevations in Feet above Mean Sea Level.
Universal Transverse Mercator Projection

REFERENCE

Triangulation Station — Spot Elevation, in feet .257
Contours, Elevation 800 1000 — Wooded Areas
,, Depression 1000 800 — Swamp or Marsh
,, Approximate
Stream, Intermittent — Ferry — W.L. 241
Dam — Falls — Navigation Light — Mud — Sand
Aerodrome, on Land — Elevation in Feet 250 — on Water
Main Electric Power Line

GRID ZONE DESIGNATION: 8 V	TO GIVE A STANDARD REFERENCE ON THIS SHEET TO NEAREST 1,000 METRES			
100,000 M. SQUARE IDENTIFICATION: NE PE / ND PD (690, 60)	SAMPLE POINT: TRIANGULATION STATION			
	1. Read letters identifying 100,000 metre square in which the point lies:	PE		
	2. Locate first VERTICAL grid line to LEFT of point and read LARGE figures labeling the line either in the top or bottom margin, or on the line itself: Estimate tenths from grid line to point:		2 5	
IGNORE the SMALLER figures of any grid number; these are for finding the full coordinates. Use ONLY the LARGER figures of the grid number; example: 630000	3. Locate first HORIZONTAL grid line BELOW point and read LARGE figures labeling the line either in the left or right margin, or on the line itself: Estimate tenths from grid line to point:			1 4
	SAMPLE REFERENCE:	PE2514		
	If reporting beyond 18° in any direction, prefix Grid Zone Designation as:	8VPE2514		

TEN THOUSAND METRE
UNIVERSAL TRANSVERSE MERCATOR GRID
ZONE 8

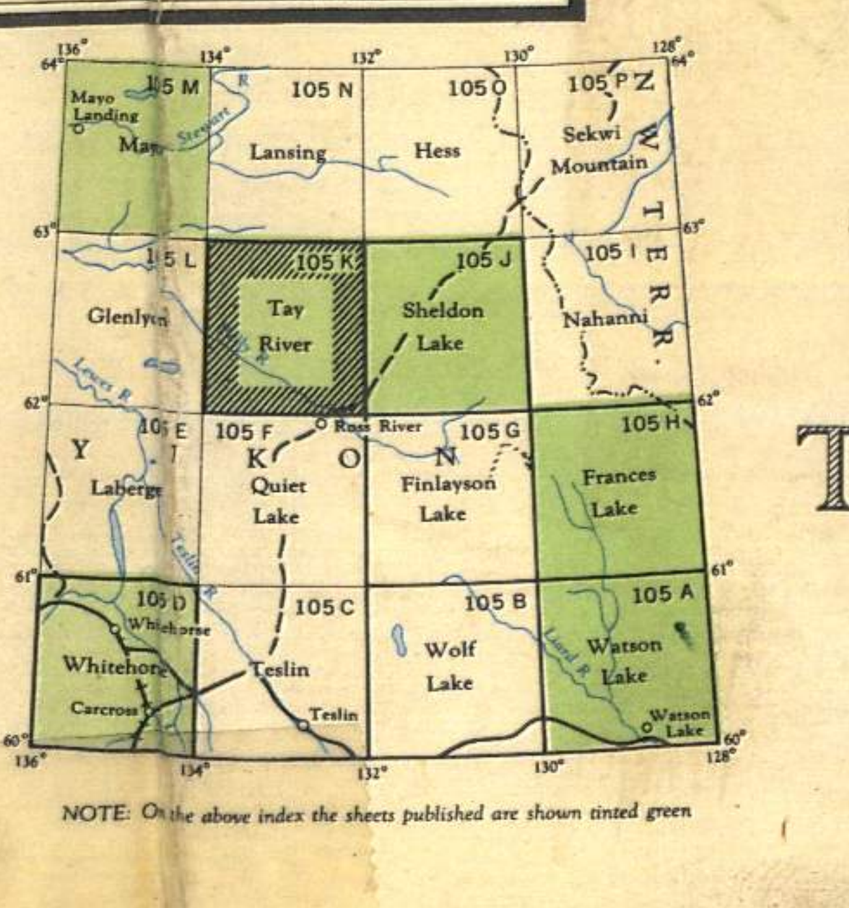

NOTE: On the above index the sheets published are shown tinted green

Note: Copies of this map required for official purposes may be obtained from the Army Survey Est. AHQ, Ottawa. The general public may obtain copies from the Map Distribution Office, Dept. of Mines and Technical Surveys, Ottawa, at 25 cents per copy.

TAY RIVER

YUKON TERRITORY

013622

SHEET 105 K
FIRST EDITION

Area Boundary

Tay River SHEET 105K

13	14	15	16
12	11	10	9
5	6	7	8
4	3	2	1