

013751

SUITE 1102-347 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-9251

DAVE FOR YR INFO.

NEWS RELEASE

March 31, 1971

Matt Berry Mines Ltd. has purchased from Radio Hill Mines Co. Ltd. two groups consisting of 28 claims in the Frances Lake area of the Yukon. The Claim group known as the Frances 1-14 and 15 - 28 form a continuous block of ground with other Matt Berry holdings of 264 claims for a total 292 claims.

The purchase price of the Frances claims 1 to 28 was the issuing of 110,000 Matt Berry treasury shares to Radio Hill mines. The Frances claims now become part of the ground held under option by an agreement dated June 1st. 1970 between Matt Berry and Canadian Nickel Company Limited (Canico) and Metallgesellschaft Canada Limited.

Under the agreement, if Canadian Nickel and Metallgesellschaft spend \$500,000. they together will earn a 60% interest in the Matt Berry Frances Lake property which now includes the 28 Radio Hill claims. Canadian Nickel and Metallgesellschaft also have the option to purchase 2,600,000 unissued shares of the total capital of 5,000,000 shares of Matt Berry Mines.

Prior to the agreement of June 1st. 1970, Matt Berry had expended over \$340,000 in exploration on the property. Since the agreement date, over \$125,000 additional exploration work has been carried out. Exploration is continuing.

The Company has assigned its interest in the Province of Ontario Exploration license No. 20 in the Winisk River area of northwestern Ontario to Nordev Mines Ltd. In return for the working rights to license No. 20, Matt Berry has received 50,000 escrowed shares of Nordev Mines. Nordev Mines has arranged through major company interest, financing of \$80,000 for airborne exploration and ground work in the Winisk River area.

MATT BERRY MINES LIMITED.

Leon La Prairie

Leon La Prairie, P. Eng.
Managing Director.


LLP/rk

P. 10.20, H. J.

FILE NUMBER - 10.20.170

RADIO HILL MINES
 CLAIMS PURCHASED BY
 MATT BERRY MINES
 FRANCES LAKE AREA - YUKON

APR 7 1971

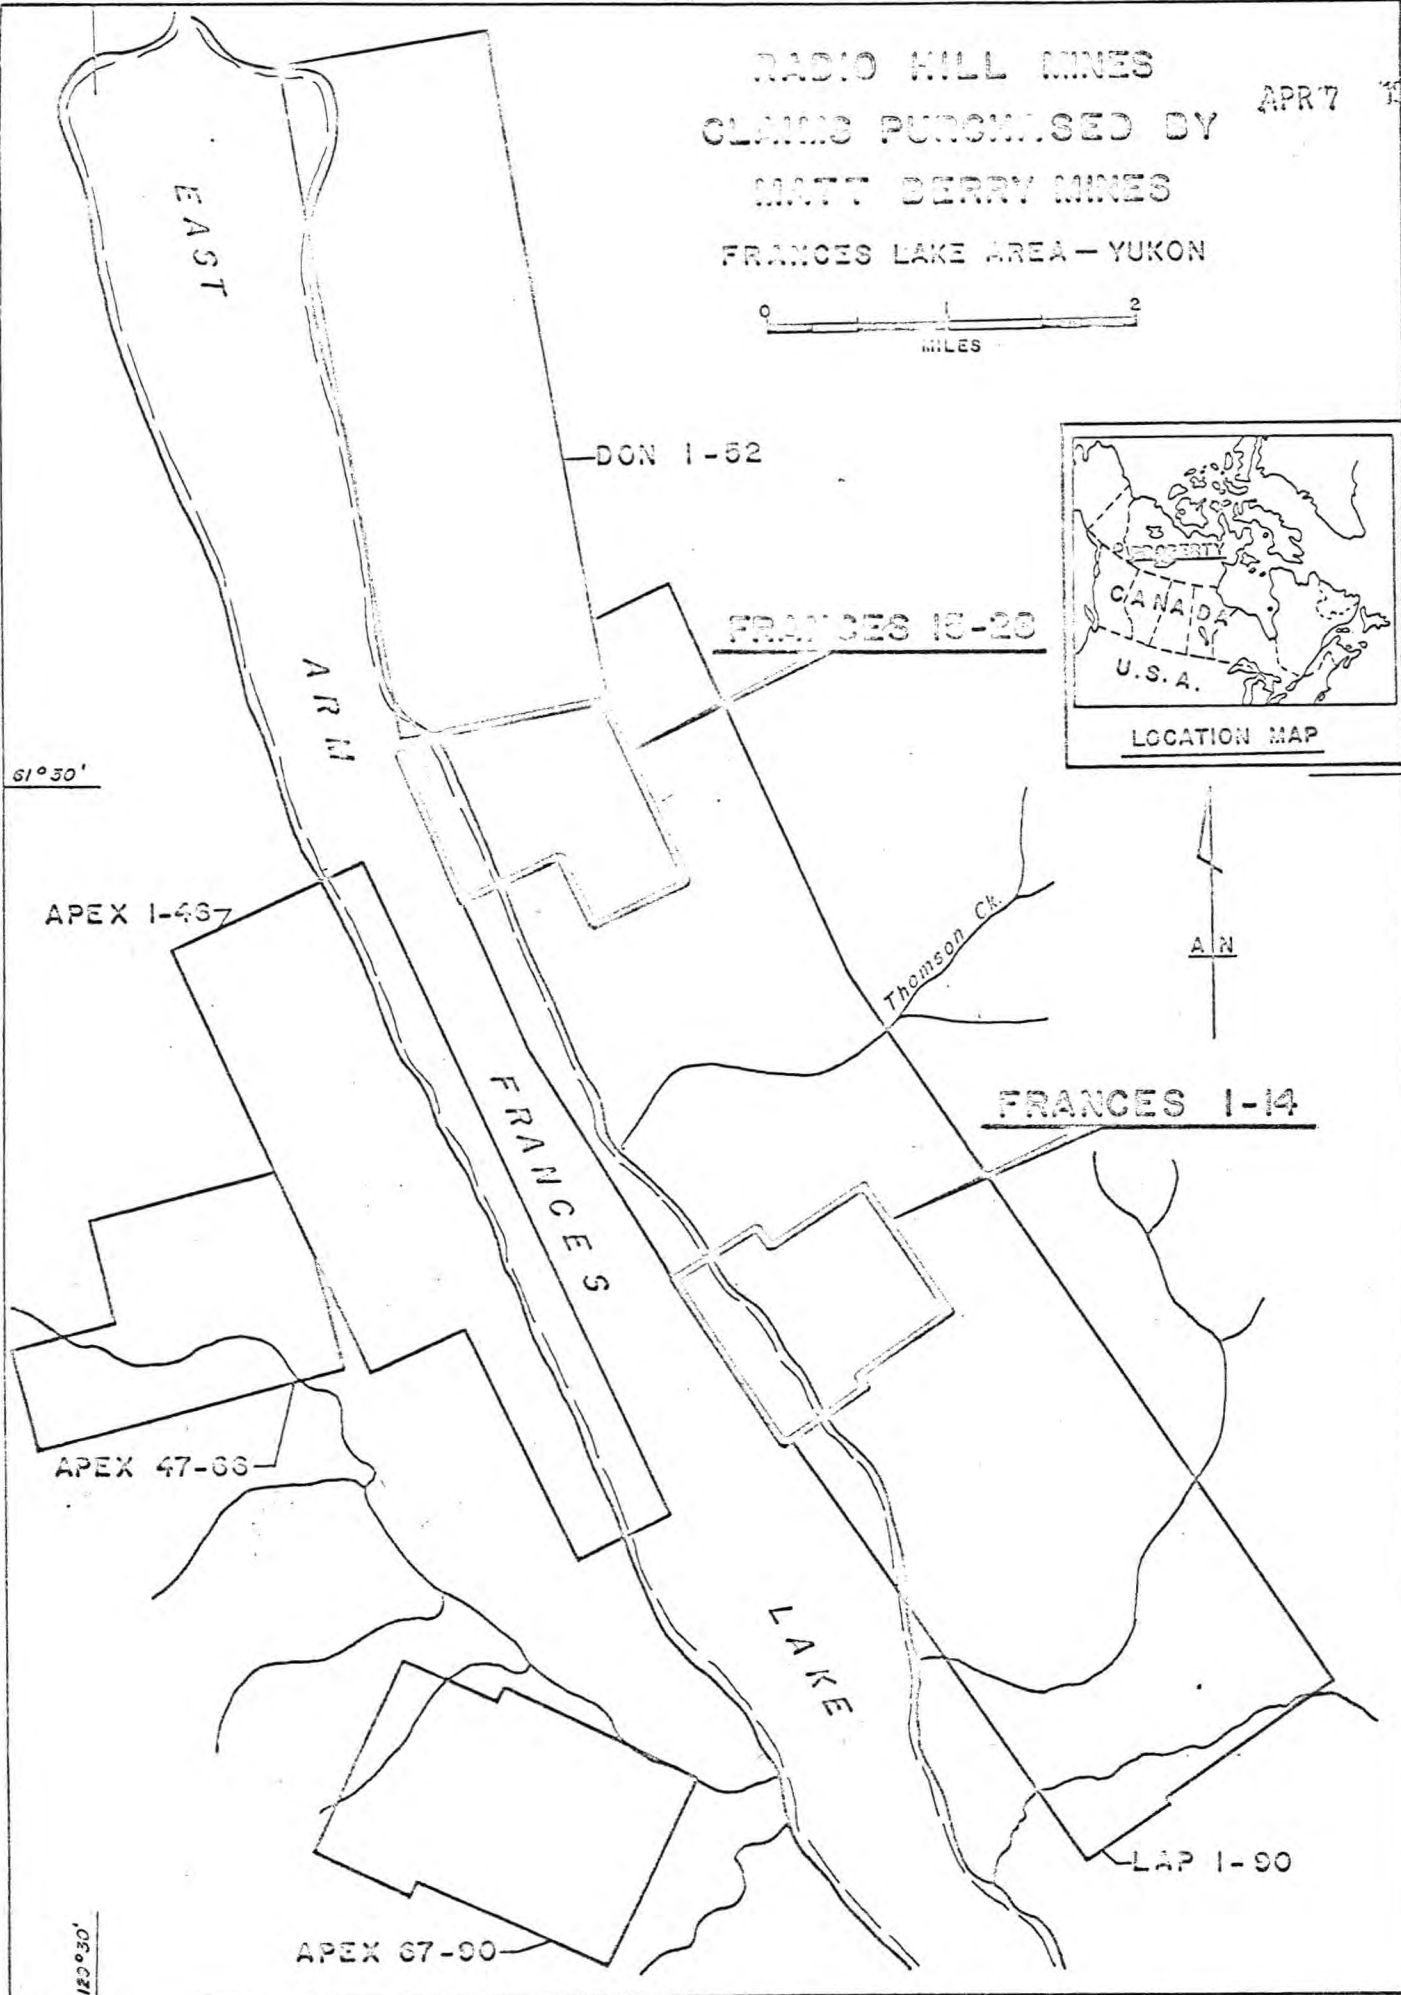

SUITE 1102 - 847 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-9251

June 9th, 1971.

FOR THE INFORMATION OF SHAREHOLDERS:

A \$200,000 exploration program is planned for the Frances Lake, Yukon Territory properties of Matt Berry Mines Ltd.

This additional expenditure for 1971 has been committed by Canadian Nickel and Metallgesellschaft. It follows the \$100,000 exploration program of the past year. Exploration of the Frances Lake ground is under a June 1970 agreement with Canadian Nickel and Metallgesellschaft. When the two companies have spent \$500,000 they together will earn a 60% interest in the Matt Berry Frances Lake property. Both Canadian Nickel and Metallgesellschaft also have the option to purchase 2,600,000 unissued shares of the total capital of 5,000,000 shares of Matt Berry Mines.

Matt Berry Mines Ltd. has recently recorded an additional 60 claims comprised of two groups in the Yukon. The first group consisting of the Kay 1-52 claims adjoins the company's holdings on the west shore of Frances Lake and the second group is continuous with the original discovery group on the east shore of Frances Lake. The company has a total of 352 claims in the Joint Venture project held under the agreement in the Yukon holdings. The 1971 field program is now underway.

Matt Berry Mines also entered into a working option arrangement with Nordev Mines in which Nordev has to spend \$100,000 in exploration on the company's 37 claim group in Ontario's Sturgeon Lake area to earn a 50% interest. Matt Berry retains a non-assessable 50% interest until the \$100,000 is spent.



MATT BERRY MINES LIMITED.

Leon La Prairie

Leon La Prairie, P. Eng.
MANAGING DIRECTOR



MATT BERRY MINES LTD.
CLAIM HOLDINGS
JOINT VENTURE
(CANICO - METALL - MATT BERRY)
FRANCES LAKE AREA - YUKON

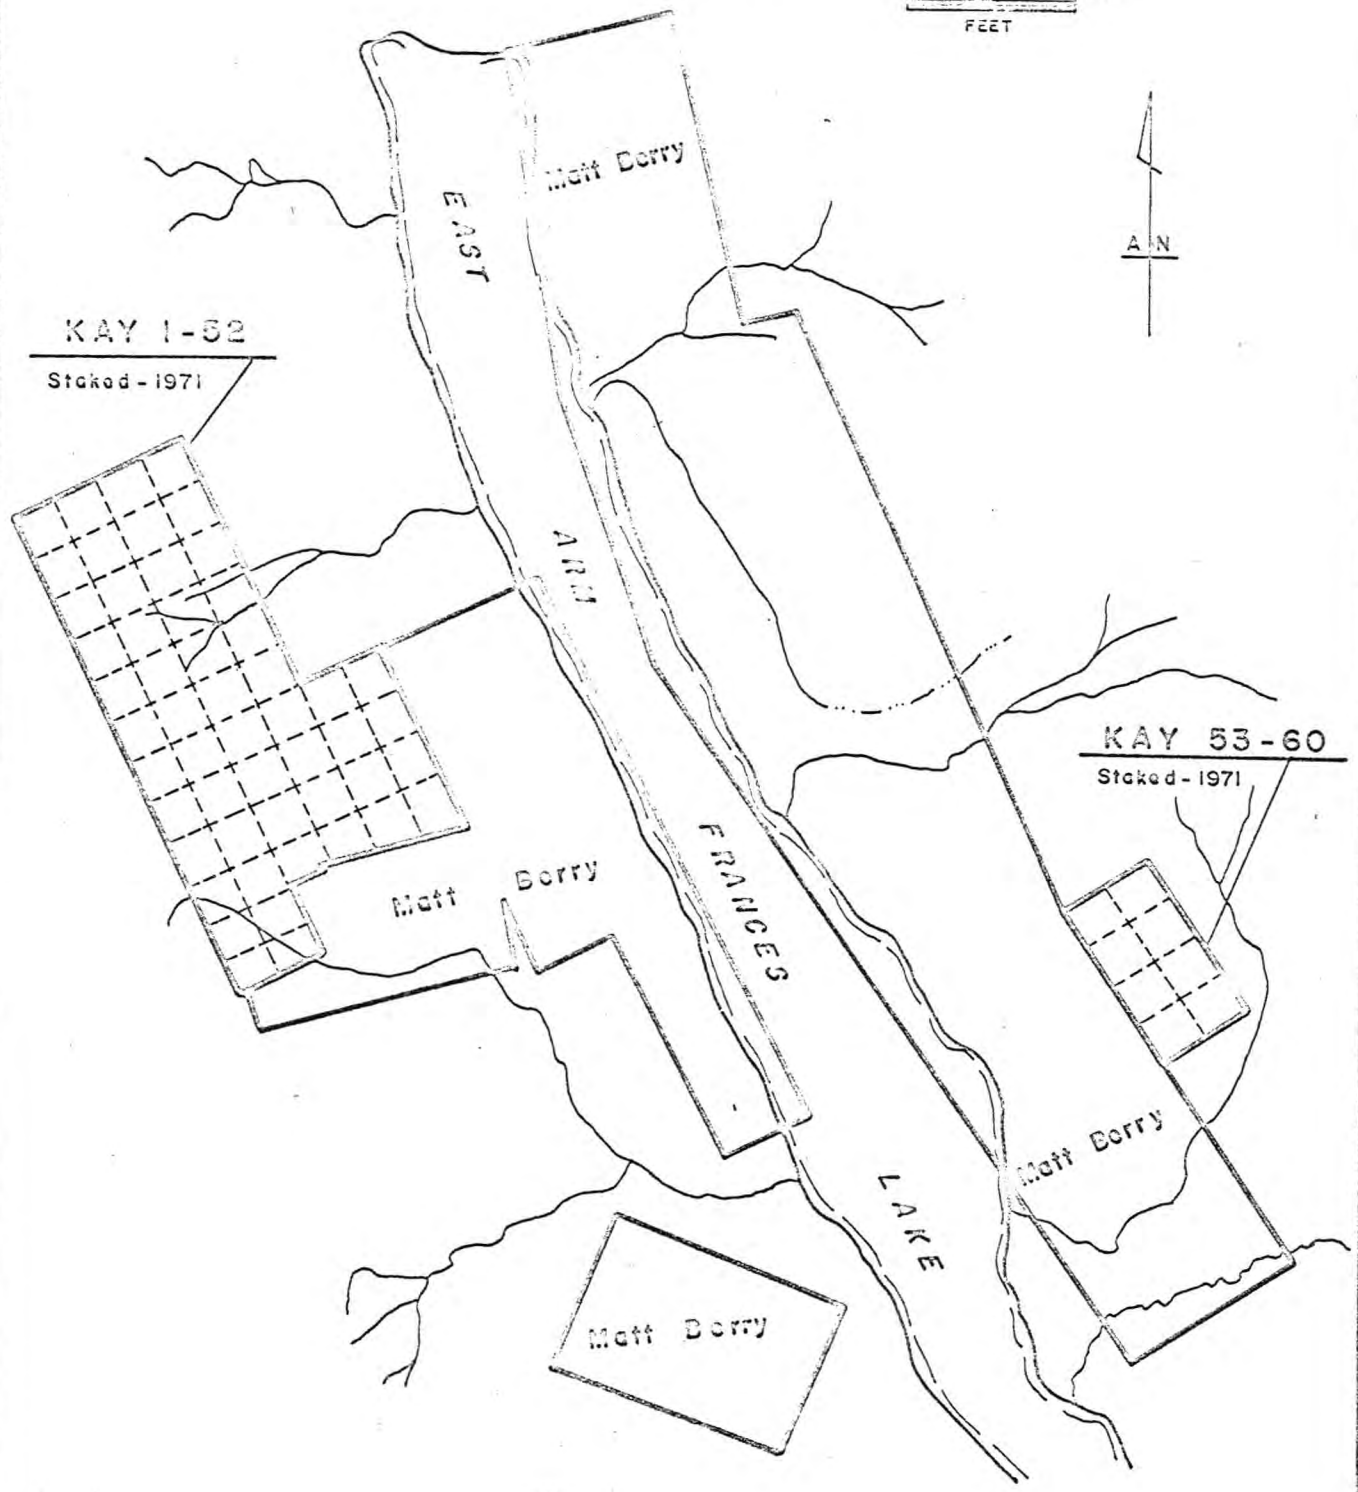

May 15, 1971

Property
105 H/6

SUITE 1102 - 347 BAY STREET
TORONTO 1, ONTARIO

MATT BERRY Mines Ltd.
Francis Lake, Yukon

1968-70

Telephone:
366-9251 Pb, Zn,
Ag

January 8, 1970


MATT BERRY MINES LIMITED
INFORMATION RELEASE

Assaying for Antimony content in surface and drill hole samples from the Matt Berry Mines Ltd. Francis Lake project in the Yukon shows this mineral to be present throughout the Matt Zone mineralization in varying amounts from minor values to 1% Antimony in surface trenching with 17.2 oz. Silver, 11.1% lead, 2.6% zinc along a length of 70 feet over a width of 22 inches and down the synclinal plunge in hole No. 25 at a depth of 460 feet with .91% Antimony and 3.7 oz. Silver, 6.36% lead, 11.48% zinc over a core intersection of 7 feet. In the mineralized sections the core recovery is in the order of 35% with stibnite mineralization (Antimony) expected the mineral most likely to be lost under the poor core recovery conditions. Antimony currently sells at \$1.05 per pound.

Hole No. 27 the latest in a series to be drilled has been suspended for the Yultide Season at 370 feet and will continue in the New Year. Hole No. 27 is the start of a step-out program and is expected to intersect the Matt Zone at about a depth of 650 feet. The property is located in the Yukon some 90 miles north of Watson Lake, about 12 miles east of the Ross River Highway.

The Company also has a block of 37 mineral claims in the Sturgeon Lake area of Northwestern Ontario which adjoins the west side of the Mattagami Lake Mines - Abitibi Paper Co. new Silver base metals discovery group.

Matt Berry

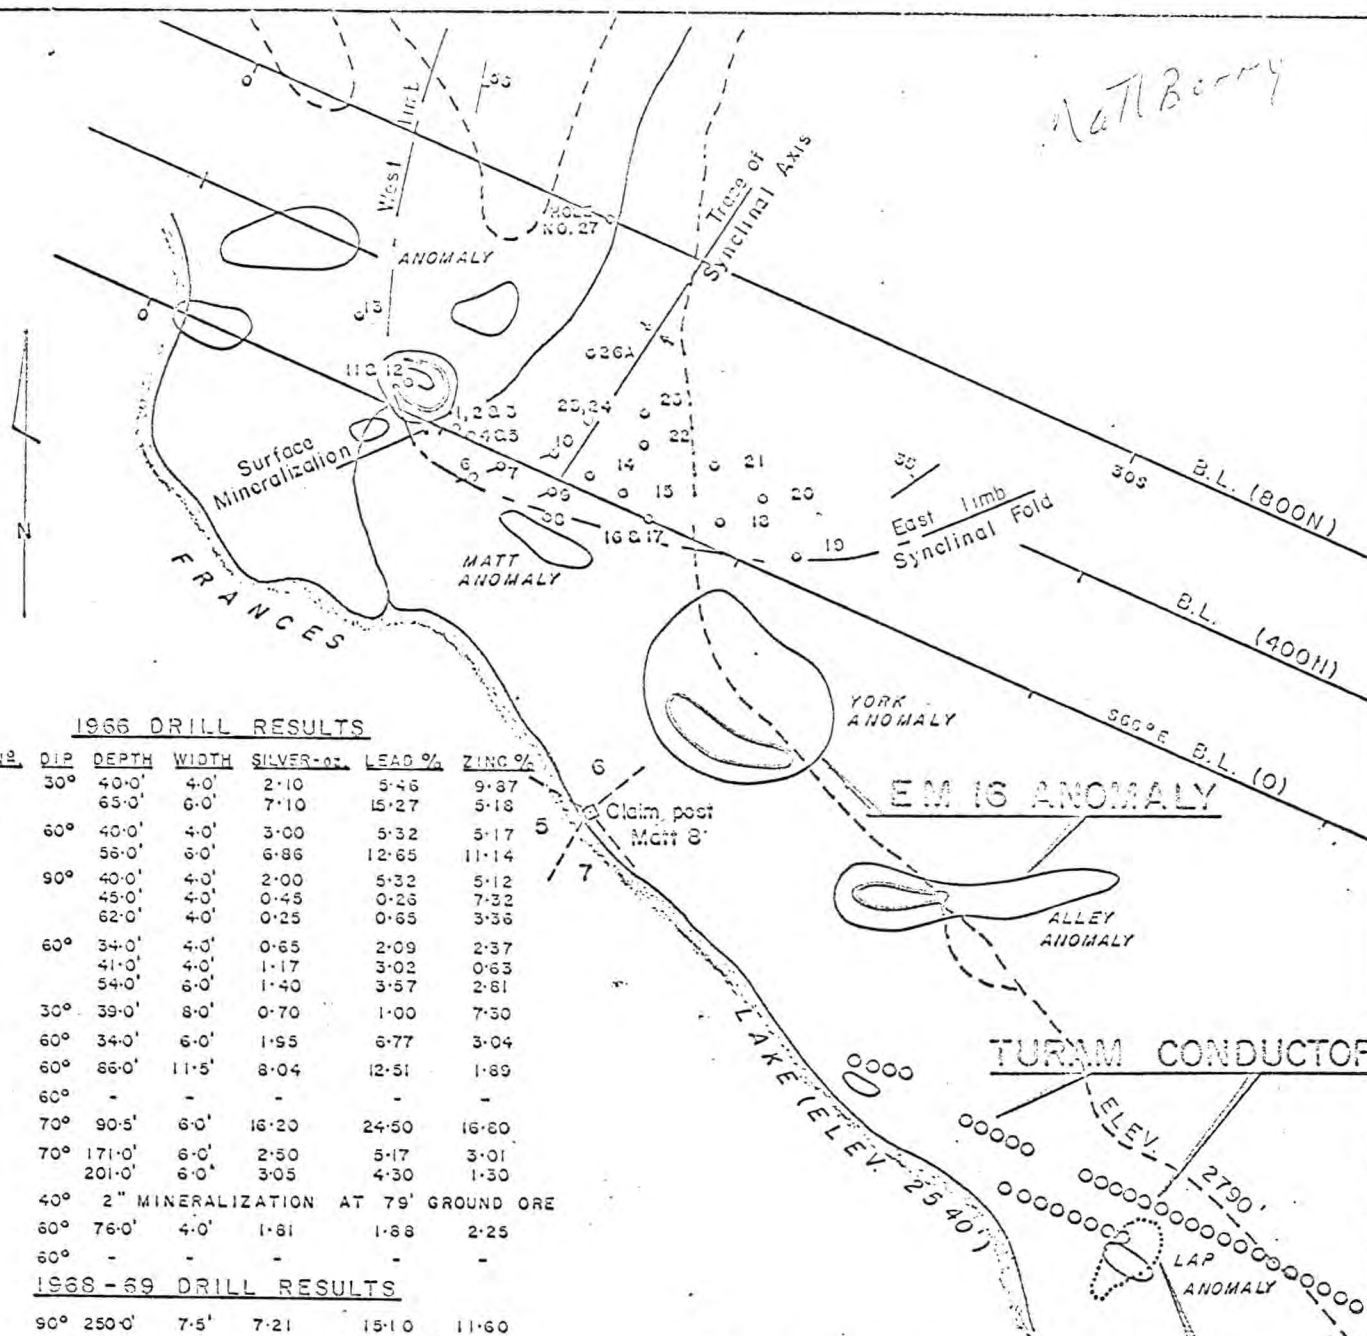

1966 DRILL RESULTS

HOLE NO.	DIP	DEPTH	WIDTH	SILVER-oz.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2-10	5-46	9-87
		65-0'	6-0'	7-10	15-27	5-18
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	6-0'	1-40	3-57	2-61
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	6-0'	1-95	6-77	3-04
7	60°	86-0'	11-5'	8-04	12-51	1-89
8	60°	-	-	-	-	-
9	70°	90-5'	6-0'	16-20	24-50	16-80
10	70°	171-0'	6-0'	2-50	5-17	3-01
		201-0'	6-0'	3-05	4-30	1-30
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-61	1-86	2-25
13	60°	-	-	-	-	-

1968-69 DRILL RESULTS

H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	6-0'	2-35	4-70	4-25
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	328-0'	4-0'	2-38	7-06	4-56
		333-0'	4-0'	5-30	11-31	16-95
		345-0'	3-4'	3-67	7-00	4-5
		361-0'	5-6'	0-60	1-01	3-03
H-23	70°	285-0'	6-0'	2-50	4-60	10-30
H-24	90°	266-0'	6-0'	0-30	0-43	3-40
H-25	70°	399-5'	4-0'	2-10	7-45	6-19
		411-0'	2-0'	2-50	5-14	1-08
		474-5'	7-0'	3-70	6-36	11-48


1969-1970 DRILL RESULTS

H-26A	70°	422-0'	6-5'	0-84	3-56	3-55
H-27	NOW DRILLING ON BASE LINE 800N					

GEOCHEMICAL ANOMALY

These diamond drill Silver-Lead-Zinc values occur in a stratiform structure which is being further drilled for mineralized extensions.

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE: Dec. 16, 1969



SUITE 1102 - 347 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-9251

November 3, 1969

FROM: MATT BERRY MINES LIMITED

On the Matt Berry Mines Frances Lake Project in the Yukon a geophysical crew of Seigel Associates Ltd. have completed a Turam electromagnetic survey over approximately 500 acres.

Results of the Turam survey show significant electromagnetic response over a strike length of some 3,000 feet. The Turam conductor is in an area not previously tested by drilling but is coincidental with an EM 16 electromagnetic and a geochemical survey that were carried out by the Company's own crews in 1968. The Turam conductor starts about 2,000 feet southeast of the Main Matt Zone which has known drill values of Silver - Lead and Zinc.

On the Main Matt Zone a total of 25 holes have been completed for a footage of 6,192 feet. The drilling has outlined a syncline with continuous mineralization across the structure for 1,400 feet and down plunge for 450 feet. On the west flank and near the axis of the syncline drilling has cut from moderate to high grade silver, lead and zinc values over widths ranging from 3 to 11½ feet. Hole No. 25 completed just prior to the spring break-up was drilled the furthest down plunge which assayed in the area of the synclinal axis 3.7 oz. silver, 6.99% lead and 11.48% zinc over a width of 7 feet. The ore values are in a stratiform formation and open to strike and plunge extensions.

To achieve a viable mining operation a large tonnage must first be proven. The immediate program is to extend the known Matt Zone mineralization through a diamond drilling program which is slated to commence shortly.

New financing is being covered under a current Prospectus to place funds in the treasury to proceed with the drill program.

As shareholders you will be kept informed of progress on the property.

Matt Berry Mines Limited

Matt Berry Mines Limited, with assays from two more holes, has revised tonnage estimates on its Frances Lake silver-lead-zinc property in Yukon. Tonnage is now indicated at an inferred 400,000 tons averaging 4.2 oz. silver per ton and 17% combined lead-zinc.

The current estimate is based on 24 completed drill holes covering a length of 900 feet. Slope length is estimated at 525 feet and the average width is 7.0 feet. Leon

Western Mines
Site Construction May 1969

LaPrairie, managing director, states. On current metal prices, the 400,000-ton estimate indicates a gross value of \$57.70 per ton. The tonnage is contained in an area known as the Matt zone which is open along strike and to depth.


MATT BERRY MINES LIMITED

PROGRESS REPORT

April 30, 1969

Leon La Prairie

Managing Director

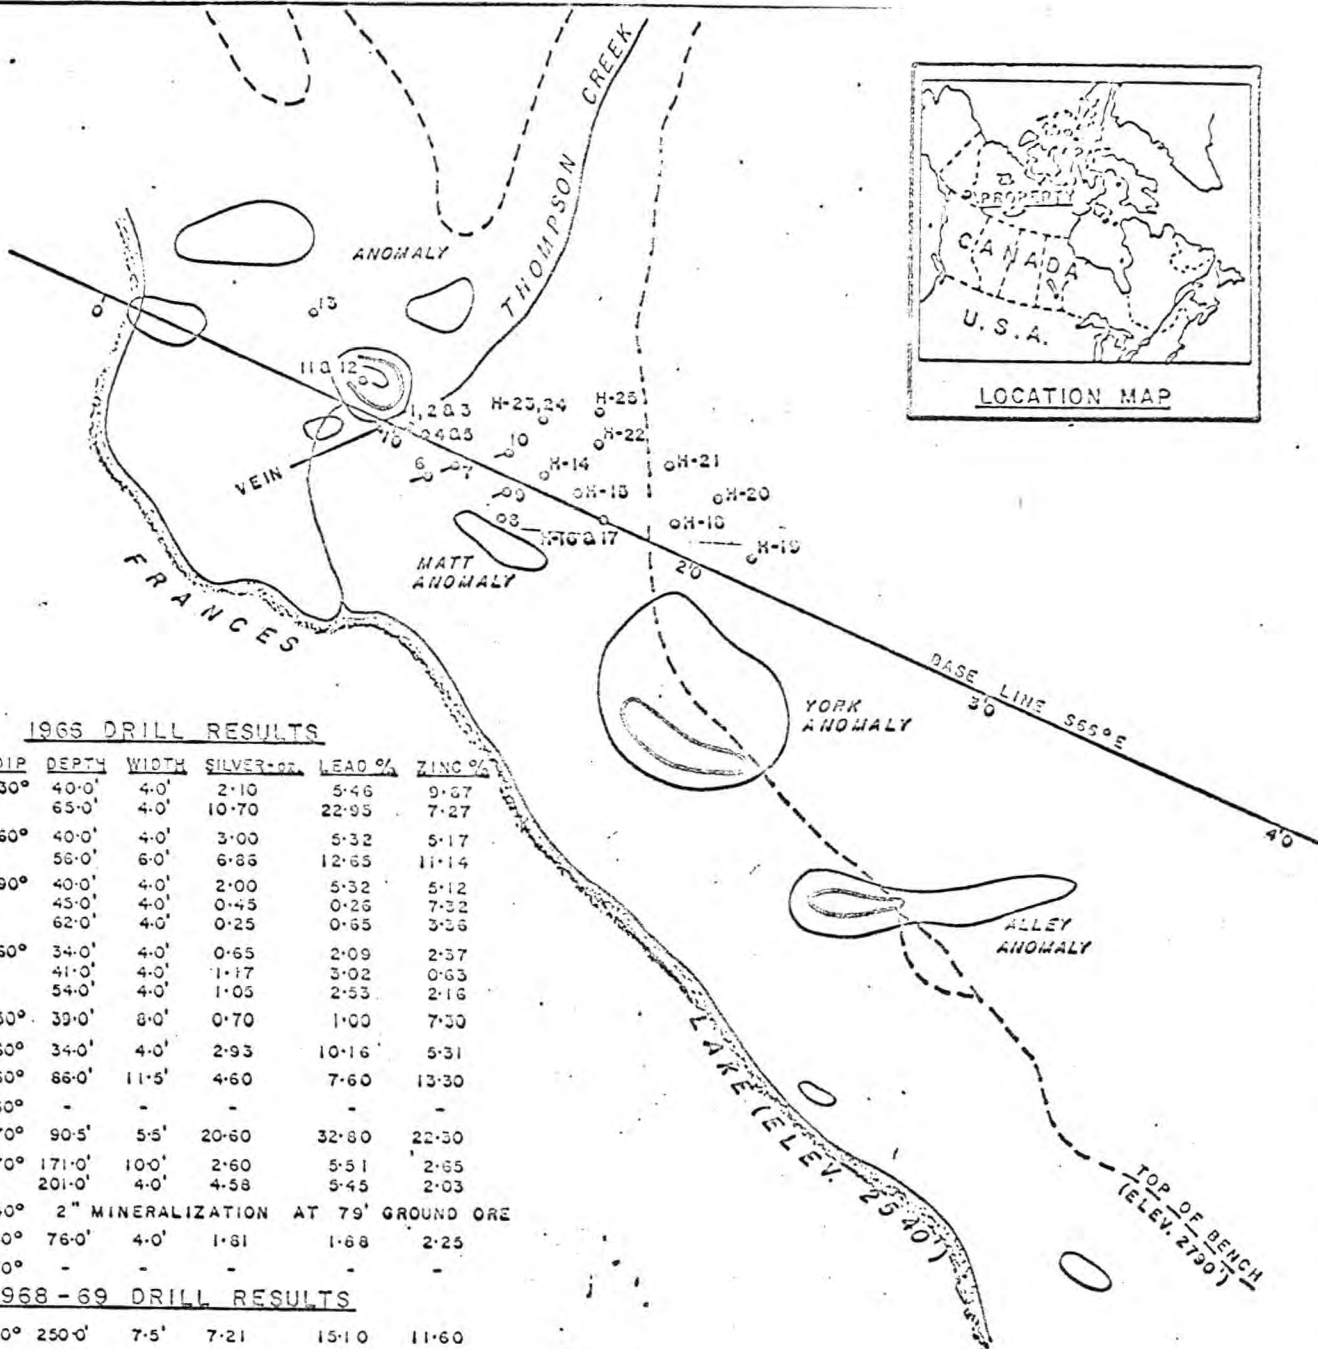

1966 DRILL RESULTS


HOLE NO.	DIP	DEPTH	WIDTH	SILVER-%	LEAD-%	ZINC-%
1	30°	40-0' 65-0'	4-0' 4-0'	2-10 10-70	5-46 22-95	9-67 7-27
2	60°	40-0' 56-0'	4-0' 6-0'	3-00 6-86	5-32 12-65	5-17 11-14
3	90°	40-0' 45-0' 62-0'	4-0' 4-0' 4-0'	2-00 0-45 0-25	5-32 0-26 0-65	5-12 7-32 3-36
4	60°	34-0' 41-0' 54-0'	4-0' 4-0' 4-0'	0-65 1-17 1-05	2-09 3-02 2-53	2-37 0-63 2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
10	70°	171-0' 201-0'	100' 4-0'	2-60 4-58	5-51 5-45	2-65 2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

1968-69 DRILL RESULTS

H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	4-8'	2-90	5-89	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	326-0' 338-0' 345-0'	4-0' 4-0' 3-4'	2-38 5-30 3-67	7-06 11-31 7-00	4-56 16-95 4-5
H-23	70°	285-0'	3-8'	4-14	8-00	17-90
H-24	90°	286-0'	4-0'	0-45	0-60	9-63
H-25	70°	399-3' 411-0' 474-5'	4-0' 20' NOW	2-10 2-50 BEING	7-45 5-14 ASSAYED	6-19 1-08

Presently line cutting is underway
is preparation of a Turam Survey.

MATT BERRY MINES LTD.
WATSON LAKE, AREA, Y.T.
LOCATION OF GEOPHYSICAL ANOMALIES
& DIAMOND DRILL HOLES
DATE May 12, 1969



MATT BERRY MINES LIMITED

PROGRESS REPORT

Period ending April 31, 1969

SUMMARY

The Matt Berry Mines property holdings consist of 3 groups comprising of 83 unpatented mineral claims. The holdings are located 96 miles north of Walson Lake and some 12 miles east of the Ross River highway, Yukon Territory.

Since the start of exploration on the Matt Zone, field work has comprised of prospecting and trenching, a limited geochemical and geophysical survey and 6,192 feet of diamond drilling.

The current tonnage based on 24 completed drill holes is now indicated at an inferred 400,000 tons averaging 4.2 oz. silver per ton and 17% combined lead and zinc.

The "Matt Zone" is open on both the strike and depth extension. The Zone is near a granite-sedimentary contact which is the same regional structure that ore deposits are associated with in the Dynasty and Swin Lake area that is some 90 miles to the north of the Matt Berry holdings.

FILED ACTIVITIES

During the month of April, 1,334 feet of drilling was completed which consisted of holes No. 23, 24 and 25. The summary of the drilling is as follows:

Hole No. 23 at 75°

Depth 435 feet casing 47 feet

Location 14+00 Base Line, 2+00 N24°E,
direction S39°W Elevation 2718

Objective To probe the depth extension of the Matt Zone.

Results The hole intersected the Matt Zone from 272 to 289.8' with mineralization occurring in two sections: from 274' to 275' and from 285' to 289.8.

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
274	1.0'	1.84	5.5	5.4
285	3.8	4.14	8.0	17.9

MATT BERRY MINES LIMITED

PROGRESS REPORT

FIELD ACTIVITIES (con't)

Hole No. 24 at 90°
Depth 409 feet Casing 32 feet
Location 14+00 Base Line 2+00 N24°E Elevation 2718
Objective To probe the depth extension of the Matt Zone
Results The Matt Zone mineralization was intersected at 286 feet to 289 feet and from 303 feet to 308 feet.

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
286.0	4.0	0.45	0.60	9.83

* * *

Hole No. 25 at 70°
Depth 500 feet Casing 56 feet
Location 15+60 Base line 3+50 N24°E Elevation 2743
Objective To probe the extension of the dip extension of Matt Zone
Results Intersected two mineralized sections:

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
399.8	4.0	2.10	7.45	6.19
411.0	2.0	2.50	5.14	1.08
474.5	Now being assayed			

* * *

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS - Hole 1 - 13 (1966)

<u>WIDTH</u>	<u>FROM</u>	<u>TO</u>	<u>SILVER</u>	<u>LEAD</u>	<u>ZINC</u>
<u>Hole No. 1 @ 30° - Section S-10 + 50</u>					
3.5 ft.	40.0	43.5	2.3 oz.	6.25	11.69
2 ft.	66.0	68.0	21.4 oz.	45.84	14.54
<u>Hole No. 2 @ 60° - Section S-10 + 50</u>					
2 ft.	33	40	6.1 oz.	10.65	10.34
5 ft.	57	62	7.9 oz.	16.34	13.01
<u>Hole No. 3 @ 90° - Section S 10 + 50</u>					
2 ft.	41	43	4.0 oz.	10.65	10.34
3 ft.	45.5	48½	.6 oz.	.3 %	9.79%
1 ft.	64.5	65.5	1.0 oz.	2.6	13.39%
<u>Hole No. 4 @ 60° - Section S 11+ 100</u>					
1 ft.	36	37	2.8 oz.	8.38	9.49
2 ft.	42	44	4.7 oz.	12.09	2.53
2 ft.	55	57	4.2 oz.	10.13	8.74
<u>Hole No. 5 @ 90° - Section S 10 + 50</u>					
8 ft.	39	47	.7	1.0 %	7.30%
<u>Hole No. 6 @ 60° - Section 11 + 50</u>					
3 ft.	34	37	3.9	13.54	7.08
<u>Hole No. 7 @ 60° - Section S 12 + 00</u>					
<u>Hole No. 8</u> NIL					
<u>Hole No. 9 @ 70° - Section S 15 + 50</u>					
1 ft.	61	62	8.6	13.7	2.3
2 ft.	77	79	.7	1.2	16.4
4.5 ft.	90.5	95.0	20.6	32.8	22.3
<u>Hole No. 10 @ 70° - Section S 13 + 00</u>					
10 ft.	171.0	181.0	2.62	5.51	2.56
1.5 ft.	202.5	204.0	12.2	17.2	5.4

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS - 1966 (cont)

Hole No. 11 @ 40° - Section 8 + 25

Two veins had been cut, one at 69 feet and one about 79 feet. Core recovery was extremely poor and the scattered mineralization recovered was not assayed.

Hole No. 12 @ 60° - Section 8 + 25

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
2½ ft.	78.5	81.0	2.9	3.0	3.6

The above intersection is from a fracture zone and appears to be the main MATT ZONE - recovery was extremely poor in area of the sulphides.

Hole No. 13 @ 90° - Section 6 + 10

No mineralized intersections were cut and it appears that the hole was set too far to the east to intersect the main MATT ZONE.

Holes No. 14 - 17 - 1968

Hole No. 14 @ 90° - Section 14 + 75

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
7.5	250.5	258.0	7.20	15.00	11.60

Hole No. 15 @ 90° - Section 16 + 50

4.8	191.5	196.3	2.93	5.87	5.35
-----	-------	-------	------	------	------

Hole No 16 @ 90° - Section 18 + 50

9.0	89.0	98.0	2.19	4.24	6.24
-----	------	------	------	------	------

Hole No. 17 @ 60° - Section 18 + 50

9.5'	63.0	79.0	.63 oz.	2.3%	7.9%
------	------	------	---------	------	------

Hole No. 18 @ 90° - Section 18 + 50 - start of 1969 drilling

3.0'	185'	188	1.0	1.71	1.48
	185'	246	Matt Zone - Scattered mineralization		

Hole No. 19 @ 90° - Section 21 + 50

2.6	117.3'	119.9	3.20	0.97	1.04
	108.5	152.1	Matt Zone - Scattered Mineralization		

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS 1968 (con't)

Hole No. 20 @ 90° - Section 20 + 00

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
	239'	350'	Matt Zone - Scattered mineralization		

Hole No. 21 @ 75° - Section 18+00

To be deepened

Hole No. 22 @ 75° Section 16+00

2.3	327.7	330.0	4.14	12.3	7.4
2.4	339.6	342.0	9.10	17.4	26.1
3.4	345.0	348.4	3.67	7.0	4.5

Hole No. 23 @ 75° - Section 14+00

3.8	286	289.8	4.14	8.00	17.9
-----	-----	-------	------	------	------

Hole No. 24 @ 90° Section 14 + 00

3.9	285.9	289.8	.46	.62	10.0
2.0	306.2	308.3	.62	1.30	10.3

Hole No. 25 @ 70° Section 15 + 60

4.0'	399.8	403.8	2.10	7.46	6.19
2.0	411.0	413.0	2.50	5.14	1.08
	474.5	now being assayed			

MATT BERRY MINES LIMITED

PROGRESS REPORT

1966 DILLING COMPLETED

Hole No. 66 - 1	-	12 foot casing	166' depth
66-2	-	15 foot casing	122' "
66-3	-	12 foot casing	71'
66-4	-	12 foot casing	141'
66-5	-	8 foot casing	93'
66-6	-	34 foot casing	148'
66-7	-	25 foot casing	25'
66-7A	-	56 foot casing	141'
66-8	-	25 foot casing	178'
66-9	-	18 foot casing	18'
66-10	-	12 BX casing	246'
66-11	-	12 foot casing	194'
66-12	-	10 foot casing	100'
66-13	-	32 foot casing	279'
66-14	-	42 foot casing	69' (hole frozen in)

Total footage drilled in 1966 - 1,991'

1968 DRILLING COMPLETED

Hole No. 66-14	-	42 foot casing	205' in December
68-15	-	61.5 foot casing	421'
68-16	-	31.5 foot casing	112'
68-17	-	37.0 foot casing	<u>37.0'</u>

Total footage drilled in 1968 775.0'

1969 DRILLING COMPLETED

Hole No. 68-17	-	see above	78
69-18	-	93.0 foot casing	331'
69-19	-	82.0 foot casing	407'
69-20	-	117 foot casing	433'
69-21	-	110 foot casing	340'
69-22	-	77 foot casing	503'
69-23	-	47 foot casing	425'
69-24	-	32 foot casing	409'
69-25	-	63 foot casing	<u>500'?</u>

Total footage drilled in 1969 3,426'

Total footage drilled to date 6,192'

MATT BERRY MINES LIMITED

PROGRESS REPORT

SUMMARY OF CLAIM HOLDINGS

Frances Lake - Watson Lake Mining Division, Yukon Territory

<u>RECORDED</u>	<u>CLAIMS</u>	<u>REGISTRATION</u>	<u>STATUS</u>	<u>EXPIRY</u>
Matt 1 - 8				
86874-82	8	Matt Berry	Unpatented	Jan. 7, 1971
Jim 1 - 4				
86882-85	4	Matt Berry	Unpatented	Jan. 7, 1971
Berry 1-8				
7688-95	8	"	"	"
Berry 15-20				
7702-07	6	"	"	"
Berry 25-30				
7712-17	6	"	"	"
Yoshi 8 - 28				
28935-55	21	L. La Prairie	"	Feb. 19, 1970
Yoshi 37-46				
28964-73	10	"	"	"
Sam 1-20				
28986-29005	<u>20</u>	"	"	"
	83			

MATT BERRY MINES LIMITED


PROGRESS REPORT

COMPANY SHARE DATA SUMMARY

1)	<u>Issued Shares (Qualified for trading)</u>	<u>Monies Received</u>
	Free Vendor 75,000	\$ -
	Barclay & Crawford Ltd. (1966) 200,000	50,000.00
	La Prairie 1966 management option 100,000	25,000.00
	York 1966 management option 20,000	5,000.00
	1968 Underwriting 100,000	30,000.00
	100,000	35,000.00
	50,000	20,000.00
	La Prairie 1968 management option 50,000	15,000.00
	A. Arsenault 1968 qualification 38,500	9,625.00
	P. Smith - employee service 3,000	750.00
2)	<u>Issued shares (to be qualified)</u>	
	La Prairie 1968 management option 50,000	15,000.00
	Manifold 1968 management option 25,000	10,500.00
3)	<u>Management option</u>	
	Manifold @ 25¢ - expires June 30/71 15,000	
	Vendor escrowed - Datlasaka Mines 290,000	
	- 1966 underwriting 135,000	
	425,000	<u>\$215,875.00</u>
	Total shares issued and optioned 1,261,500	

SUMMARY

Capitalization	5,000,000
Issued trading	736,500
Issued escrowed	425,000
Management option	15,000
To be qualified	85,000
Treasury shares	3,741,500

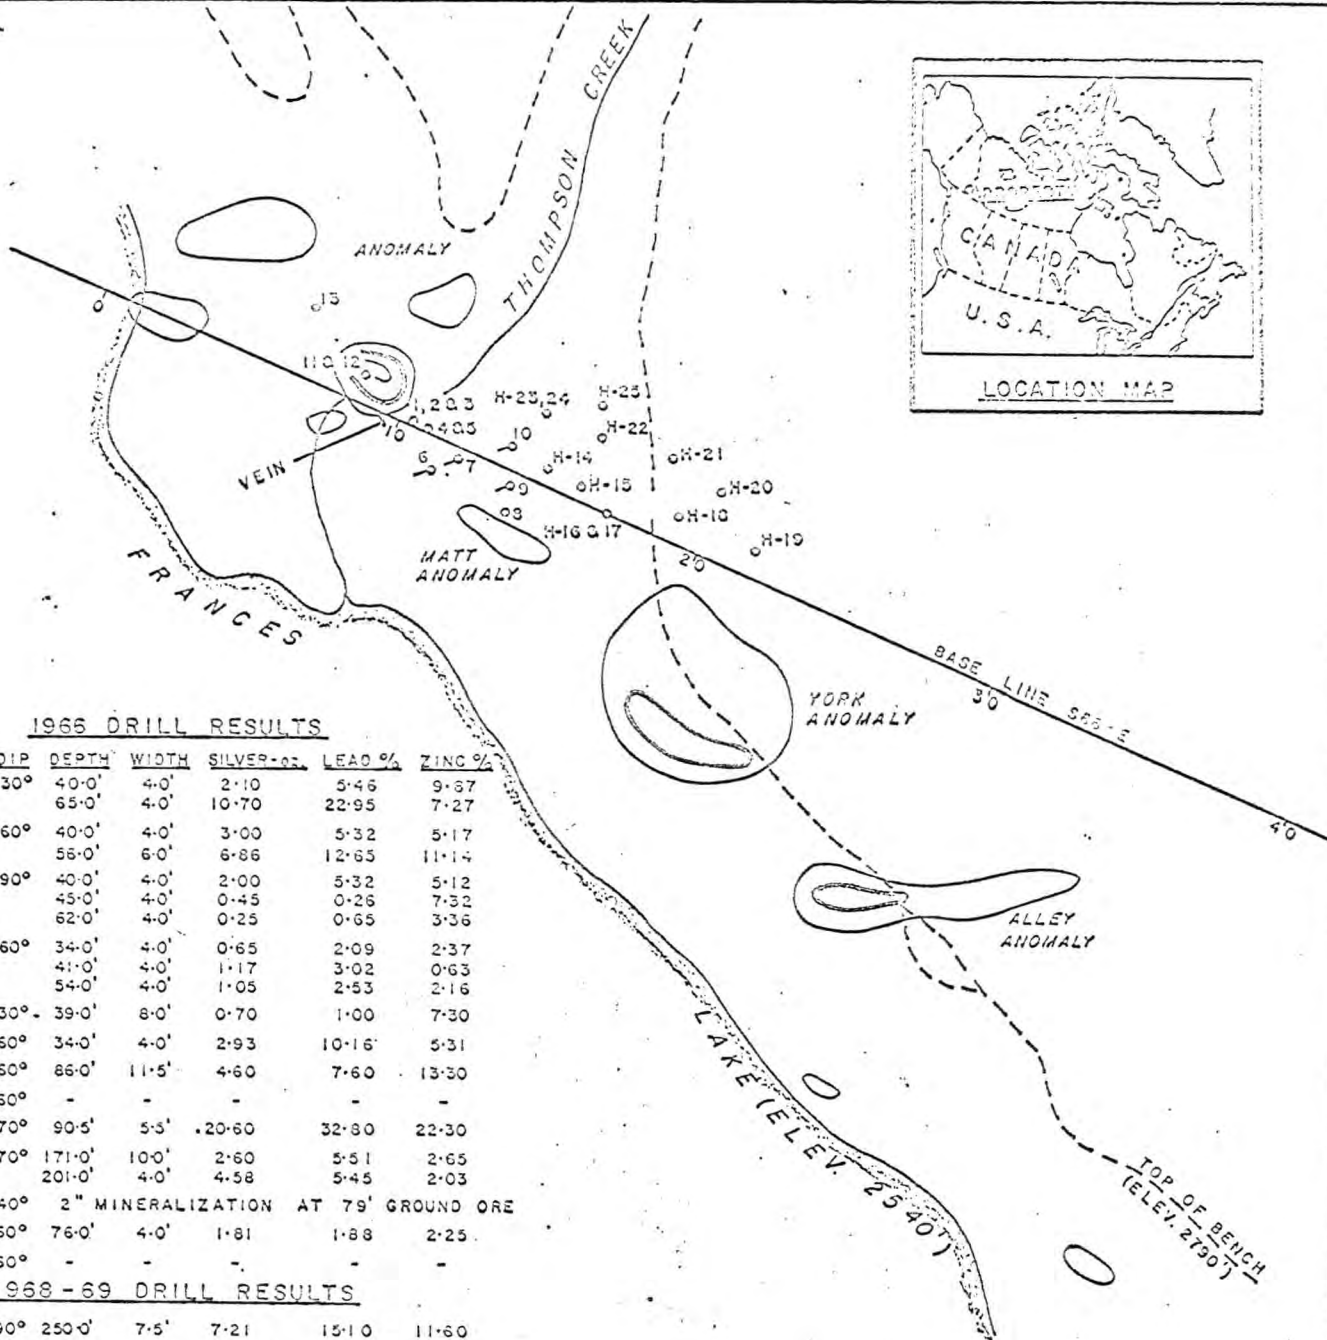


1966 DRILL RESULTS



HOLE NO.	DIP	DEPTH	WIDTH	SILVER-oz.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2-10	5-46	9-37
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-3'	20-60	32-80	22-30
10	70°	171-0'	10-0'	2-60	5-51	2-65
		201-0'	4-0'	4-58	5-45	2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

1968-69 DRILL RESULTS

H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	4-8'	2-90	5-89	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	326-0'	4-0'	2-38	7-06	4-56
		338-0'	4-0'	5-30	11-31	16-95
		345-0'	3-4'	3-67	7-00	4-5
H-23	70°	285-0'	3-8'	4-14	8-00	17-90
H-24	90°	286-0'	4-0'	0-45	0-60	9-63
H-25	NOW BEING ASSAYED					

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE May 1, 1969



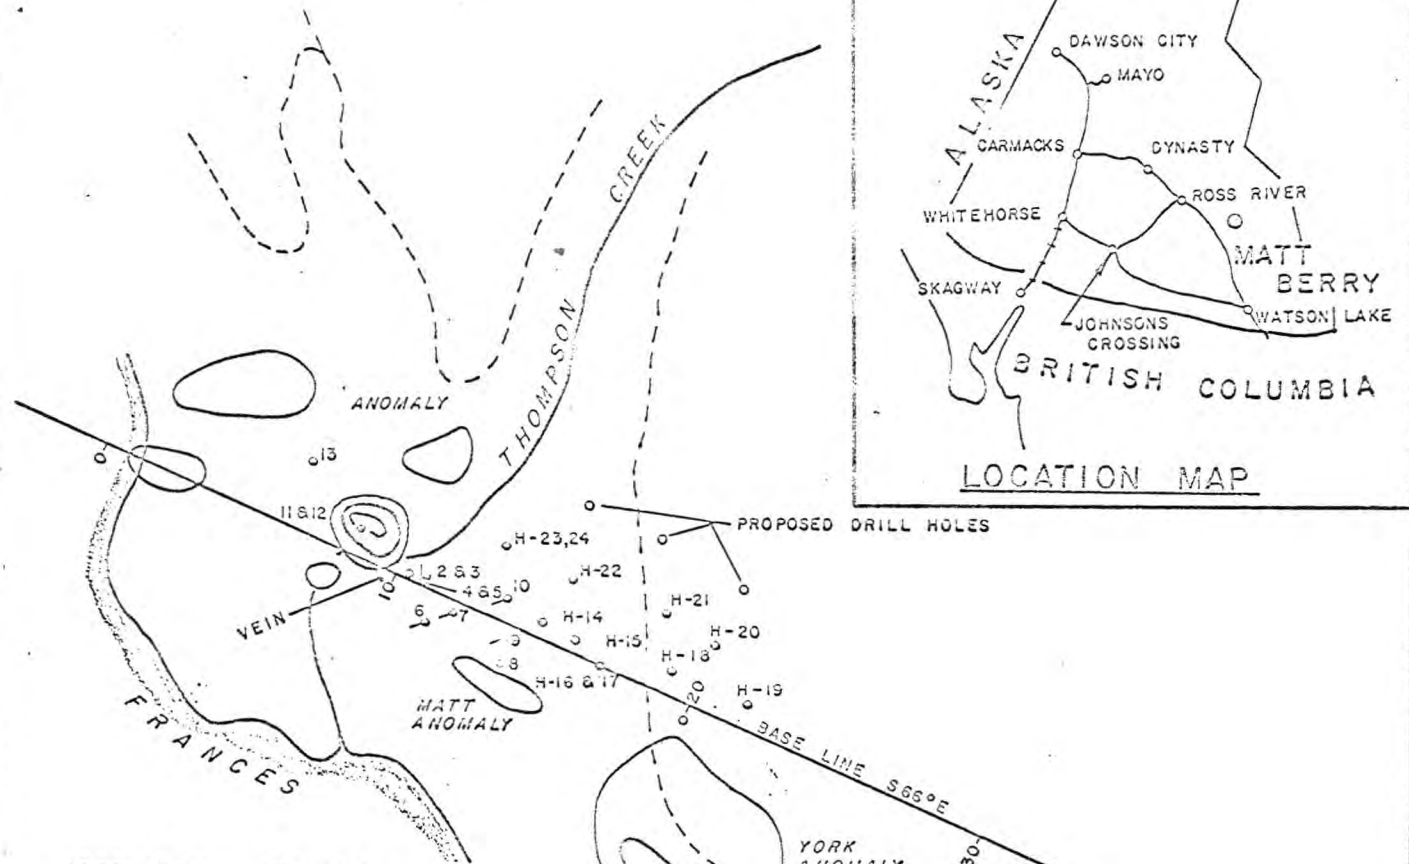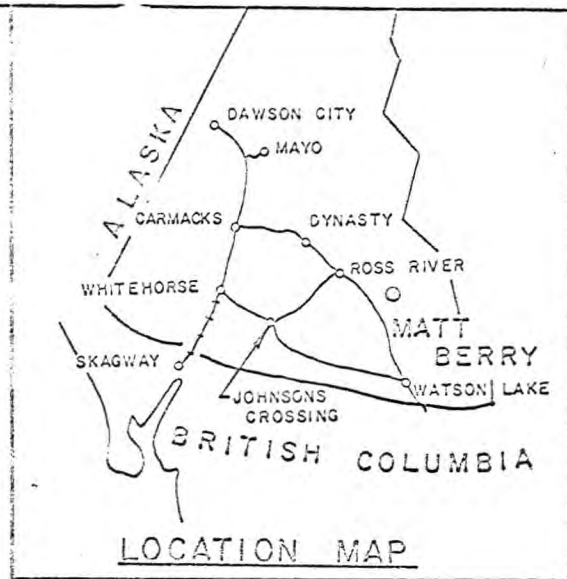


1966 DRILL RESULTS



HOLE NR.	DIP	DEPTH	WIDTH	SILVER-OZ.	LEAD %	ZINC%	
1	30°	40-0' 65-0'	4-0'	2-10 10-70	5-46 22-95	9-97 7-27	
2	60°	40-0' 56-0'	4-0' 6-0'	3-00 6-66	5-32 12-65	5-17 11-14	
3	90°	40-0' 45-0' 62-0'	4-0' 4-0' 4-0'	2-00 0-45 0-25	5-32 0-26 0-65	5-12 7-32 3-36	
4	60°	34-0' 41-0' 54-0'	4-0' 4-0' 4-0'	0-65 1-17 1-05	2-09 3-02 2-53	2-37 0-63 2-18	
5	30°	39-0'	8-0'	0-70	1-00	7-30	
6	60°	34-0'	4-0'	2-93	10-16	5-31	
7	60°	86-0'	11-5'	4-60	7-60	13-30	
8	60°	-	-	-	-	-	
9	70°	90-5'	5-5'	20-60	32-60	22-30	
10	70°	171-0' 201-0'	10-0' 4-0'	2-60 4-58	5-51 5-45	2-65 2-03	
11	40°	2" MINERALIZATION AT 78' GROUND ORE					
12	60°	78-0'	4-0'	1-81	1-88	2-25	
13	60°	-	-	-	-	-	

1968 - 1969 DRILL RESULTS

H-14	90°	250-5'	7-5'	7-21	15-1	11-6
H-15	90°	191-5'	4-8'	2-90	5-87	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-3'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	Zone Indefinite			
H-21	75°	340-0'	Lost hole - Caving - to be re-drilled			
H-22	75°	326-0' 338-0'	4-0' 4-0'	2-38 5-30	7-06 11-31	4-56 16-95
H-23	70°	285-0'	3-8'	4-14	6-00	17-90
H-24	90°	now being assayed				
H-25		now being drilled				

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE: April 25, 1969.



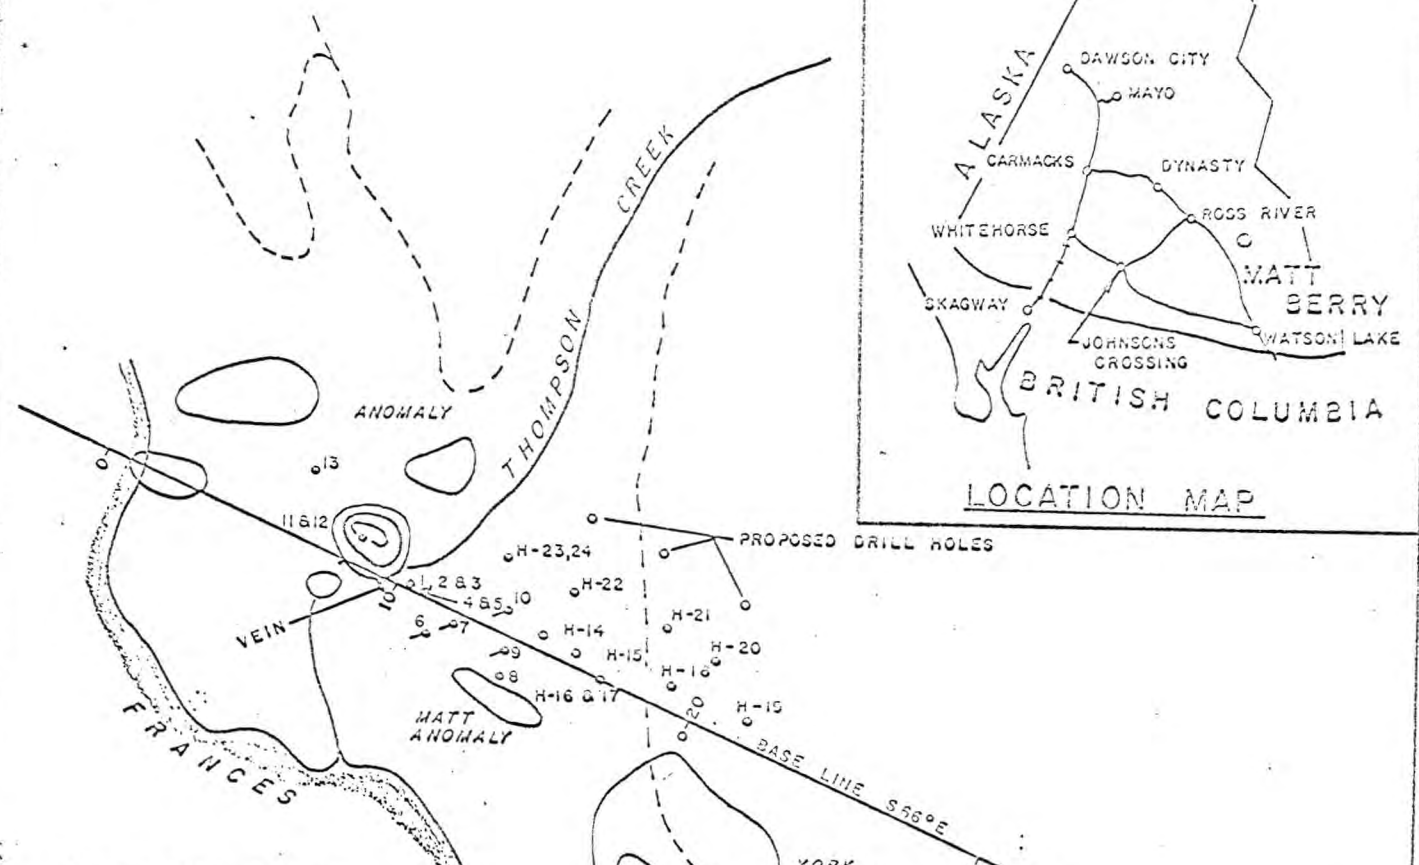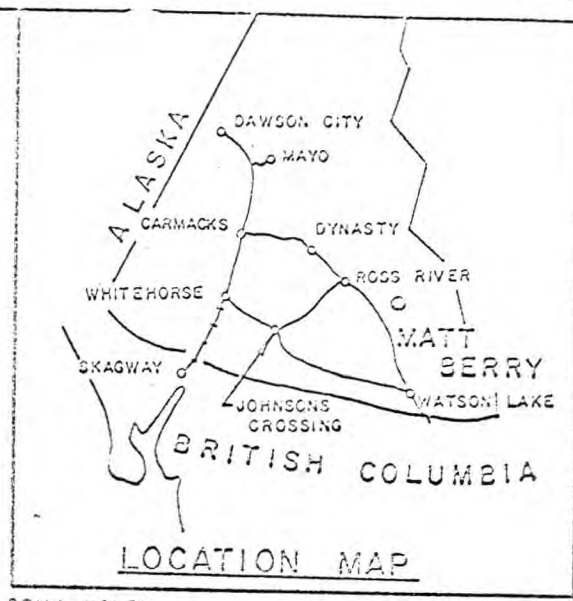


1966 DRILL RESULTS



HOLE NO.	DIP	DEPTH	WIDTH	SILVER-OZ	LEAD %	ZINC%
1	30°	40-0'	4-0'	2-10	5-48	9-87
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-66	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-53	10-46	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
10	70°	171-0'	10-0'	2-60	5-51	2-65
		201-0'	4-0'	4-58	5-45	2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	78-0'	4-0'	1-81	1-68	2-25
13	60°	-	-	-	-	-

1968 - 1969 DRILL RESULTS

H-14	90°	250-5'	7-5'	7-21	15-1	11-6
H-15	90°	191-5'	4-8'	2-90	5-87	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	165-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-3'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	Zone Indefinite			
H-21	75°	340-0'	Lost hole - Caving - to be re-drilled			
H-22	75°	326-0'	4-0'	2-38	7-06	4-58
		338-0'	4-0'	5-30	11-51	16-95
H-23	70°	now being assayed				
H-24	90°	now being drilled				

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE April 16, 1969



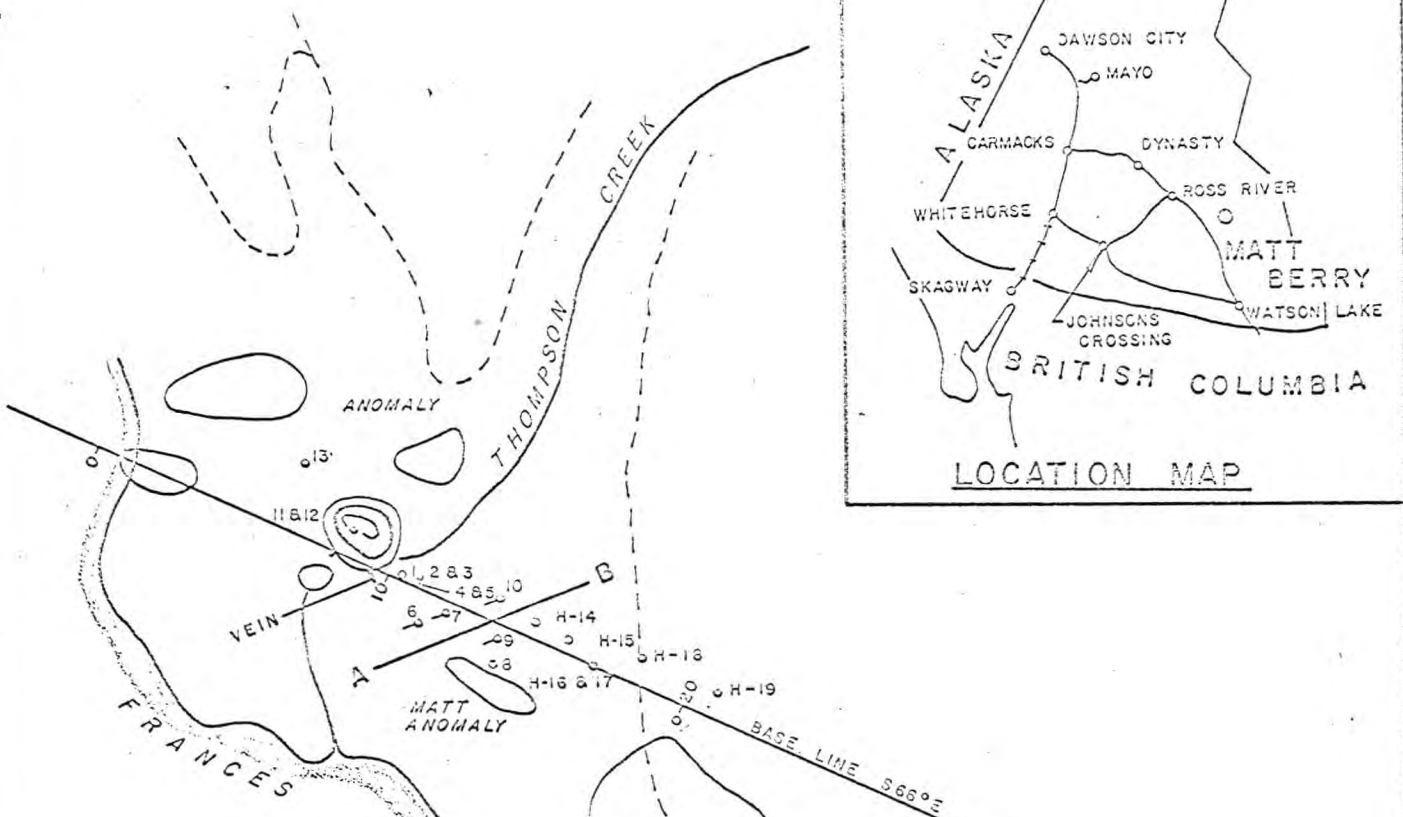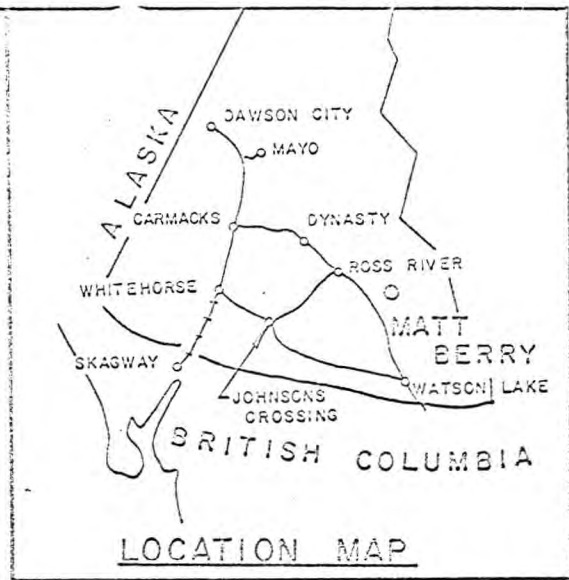

1966 DRILL RESULTS
DIAMOND DRILL ASSAYS IN SECTION A-B



HOLE NO.	DIP	DEPTH	WIDTH	SILVER-OZ.	LEAD %	ZINC%
1	30°	40-0'	4-0'	2-10	5-46	9-67
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-00
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
10	70°	171-0'	10-0'	2-60	5-51	2-65
		201-0'	4-0'	4-58	5-45	2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	78-0'	4-0'	1-81	1-08	2-25
13	60°	-	-	-	-	-

1968 - 1969 DRILL RESULTS

H-14	90°	250-5'	7-5'	7-21	15-1	11-6
H-15	90°	191-5'	4-8'	2-90	5-87	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	0-6'	2-30	2-30	7-90

H-18 90° completed - mineralization being assayed

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE: Feb. 20, 1969
 0' 600' 1200'
 SCALE IN FEET

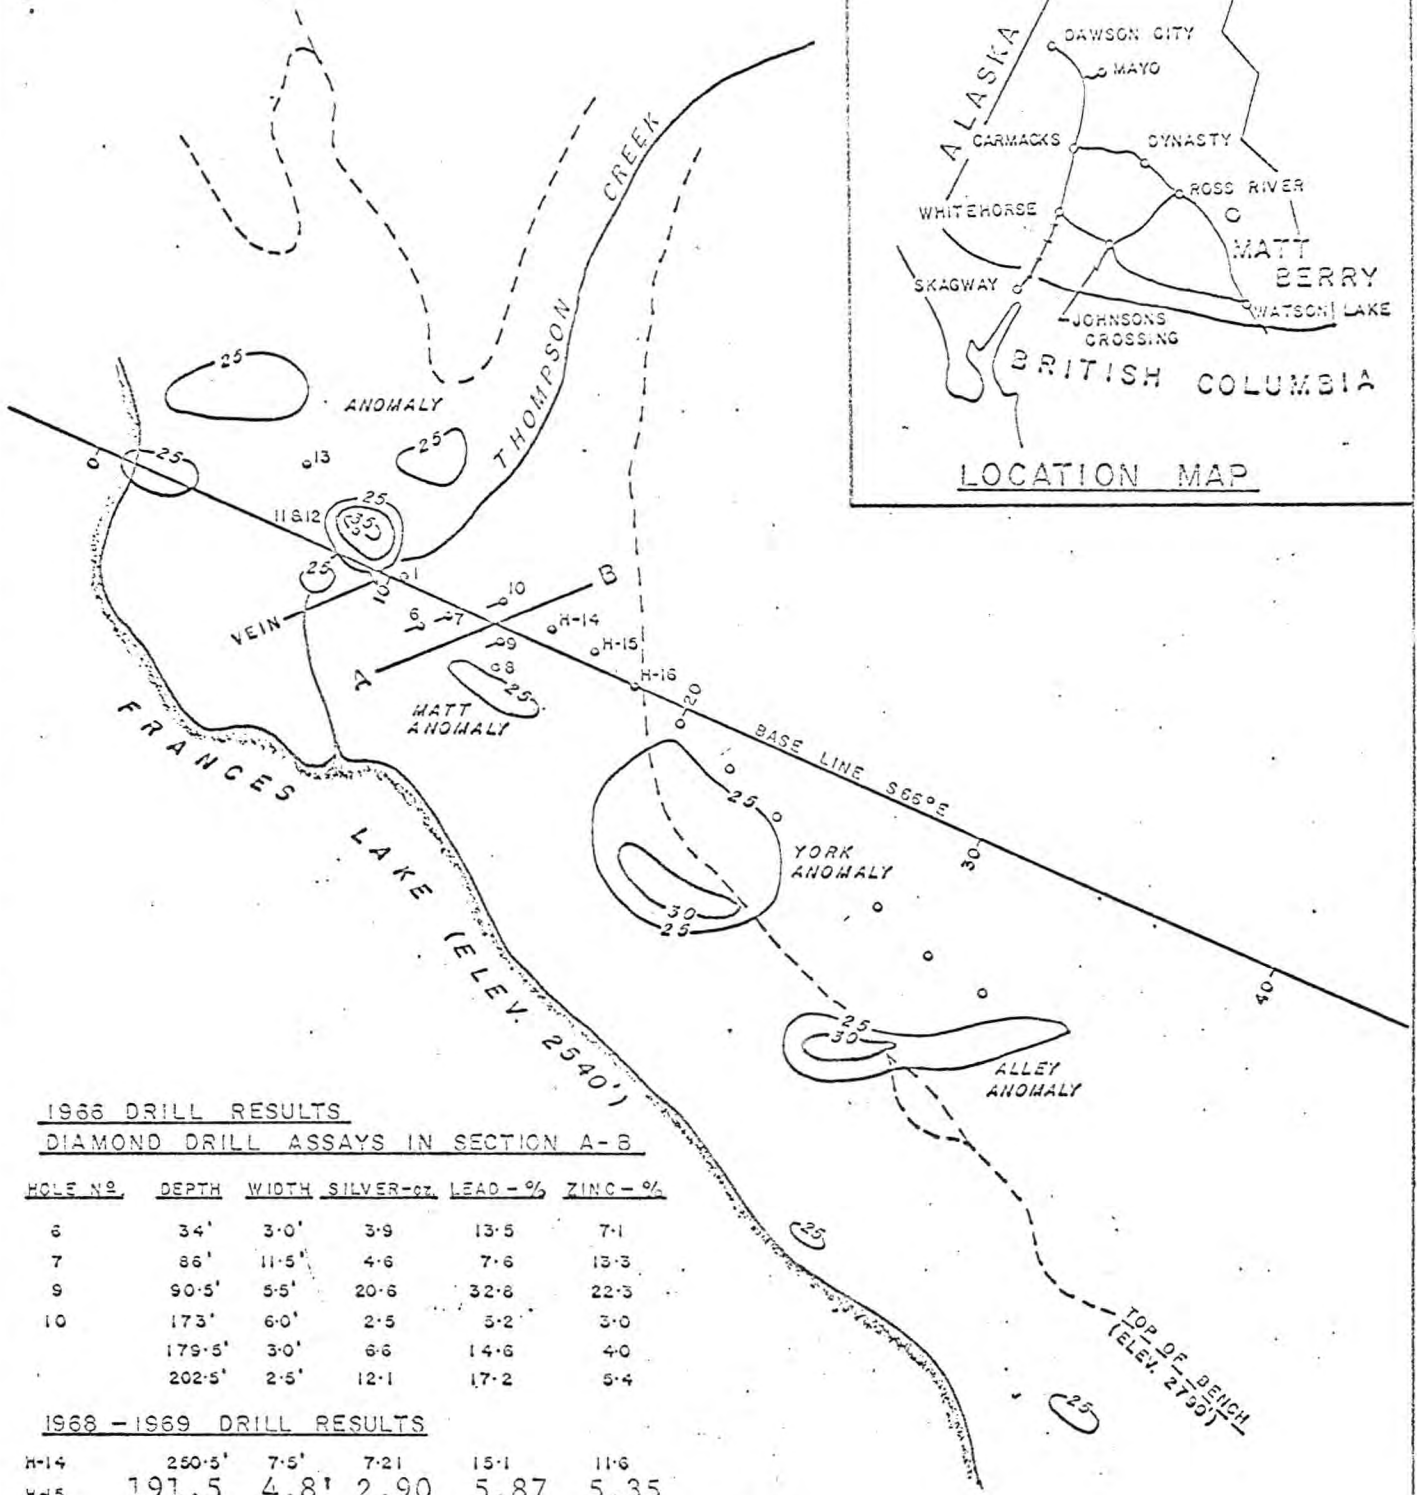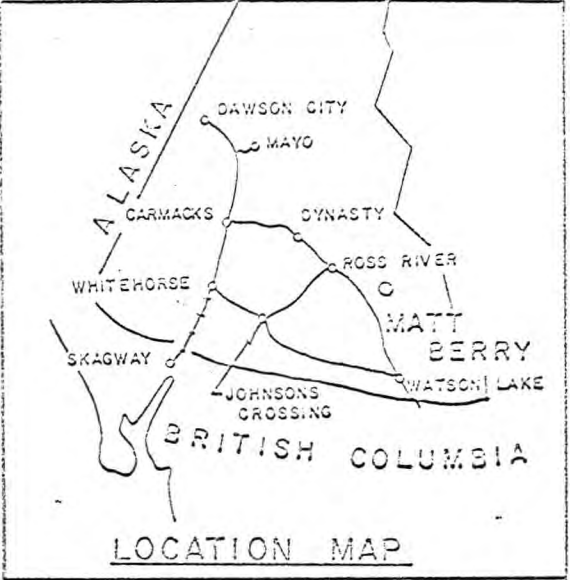

1966 DRILL RESULTS
DIAMOND DRILL ASSAYS IN SECTION A-B


HOLE NO.	DEPTH	WIDTH	SILVER-%	LEAD-%	ZINC-%
6	34'	3-0'	3.9	13.5	7.1
7	86'	11-5'	4.6	7.6	13.3
9	90-5'	5-5'	20.6	32.8	22.3
10	173'	6-0'	2.5	5.2	3.0
	179-5'	3-0'	6.6	14.6	4.0
	202-5'	2-5'	12.1	17.2	5.4



1968 - 1969 DRILL RESULTS

H-14 250-5' 7-5' 7.21 15.1 11.6
H-15 191.5 4.8' 2.90 5.87 5.35
H-16 (Vertical) completed Dec. 7th, 1968,
mineralized section between 189' and 198'
now being assayed.

H-17 (Angle Hole) started drilling Dec. 8th -
same drill location as No. 16.

MATT BERRY MINES LTD.
WATSON LAKE, AREA, Y.T.
LOCATION OF GEOPHYSICAL ANOMALIES
& DIAMOND DRILL HOLES
DEC 9 '68



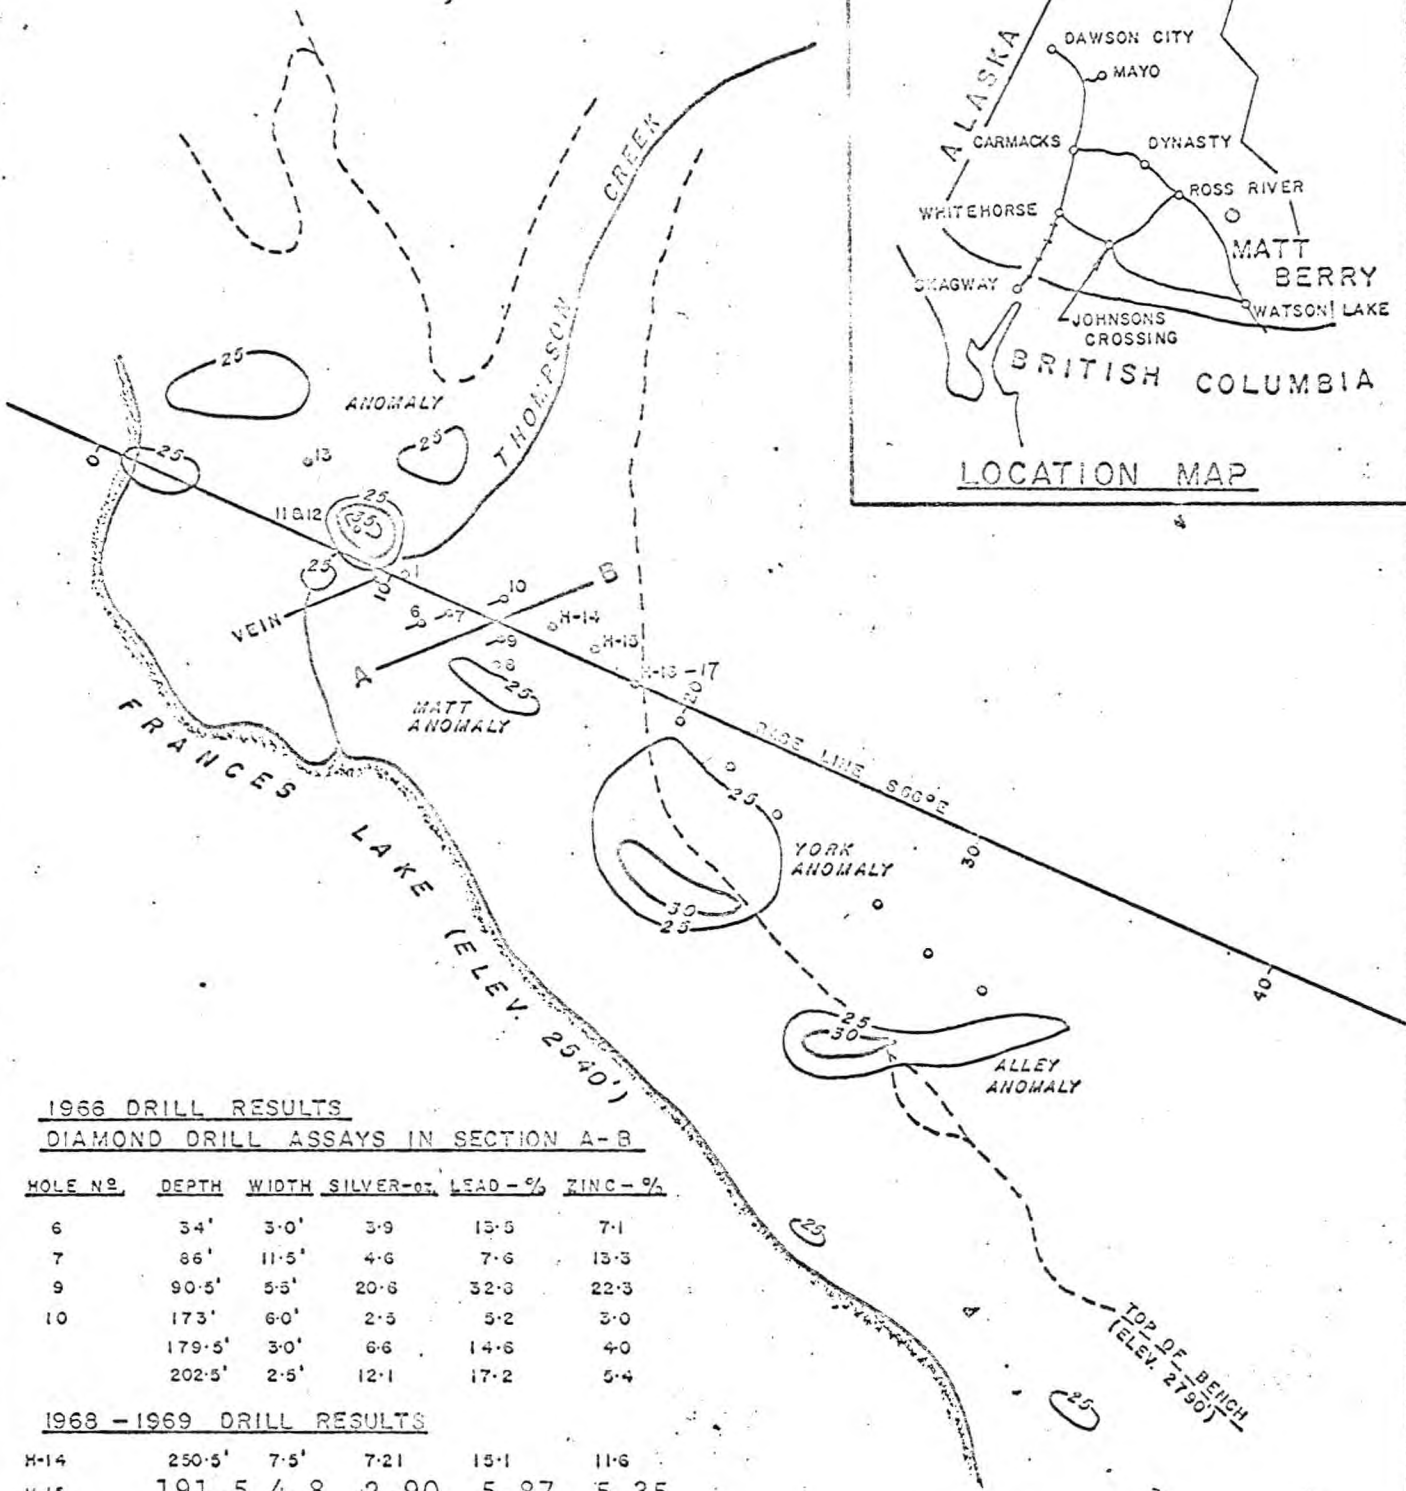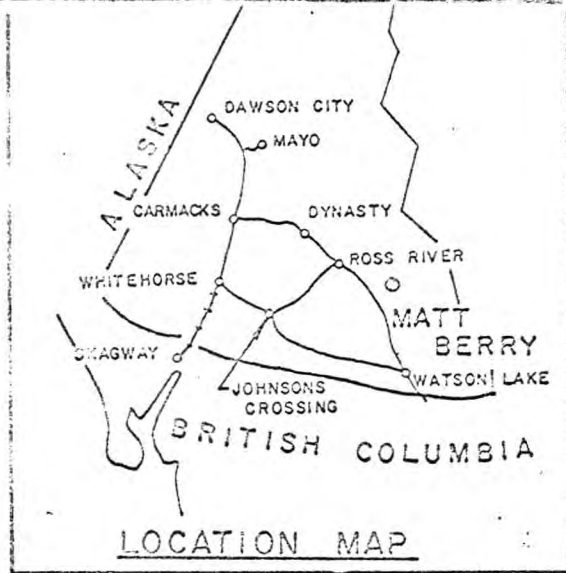


1966 DRILL RESULTS
DIAMOND DRILL ASSAYS IN SECTION A-B



HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3-0'	3.9	13.5	7.1
7	86'	11-5'	4.6	7.6	13.3
9	90-5'	5-5'	20.6	32.3	22.3
10	173'	6-0'	2.5	5.2	3.0
	179-5'	3-0'	6.6	14.6	4.0
	202-5'	2-5'	12.1	17.2	5.4

1968 - 1969 DRILL RESULTS

H-14	250-5'	7-5'	7.21	15.1	11.6
H-15	191.5	4.8	2.90	5.87	5.35
H-16	89.0	9.0	2.19	4.24	6.24
or	91.6	6.4	2.93	5.76	9.09
H-17	Collared - stopped - to resume January 6 1969				

MATT BERRY MINES LTD.
WATSON LAKE, AREA, Y.T.
LOCATION OF GEOPHYSICAL ANOMALIES
& DIAMOND DRILL HOLES
DEC 1968



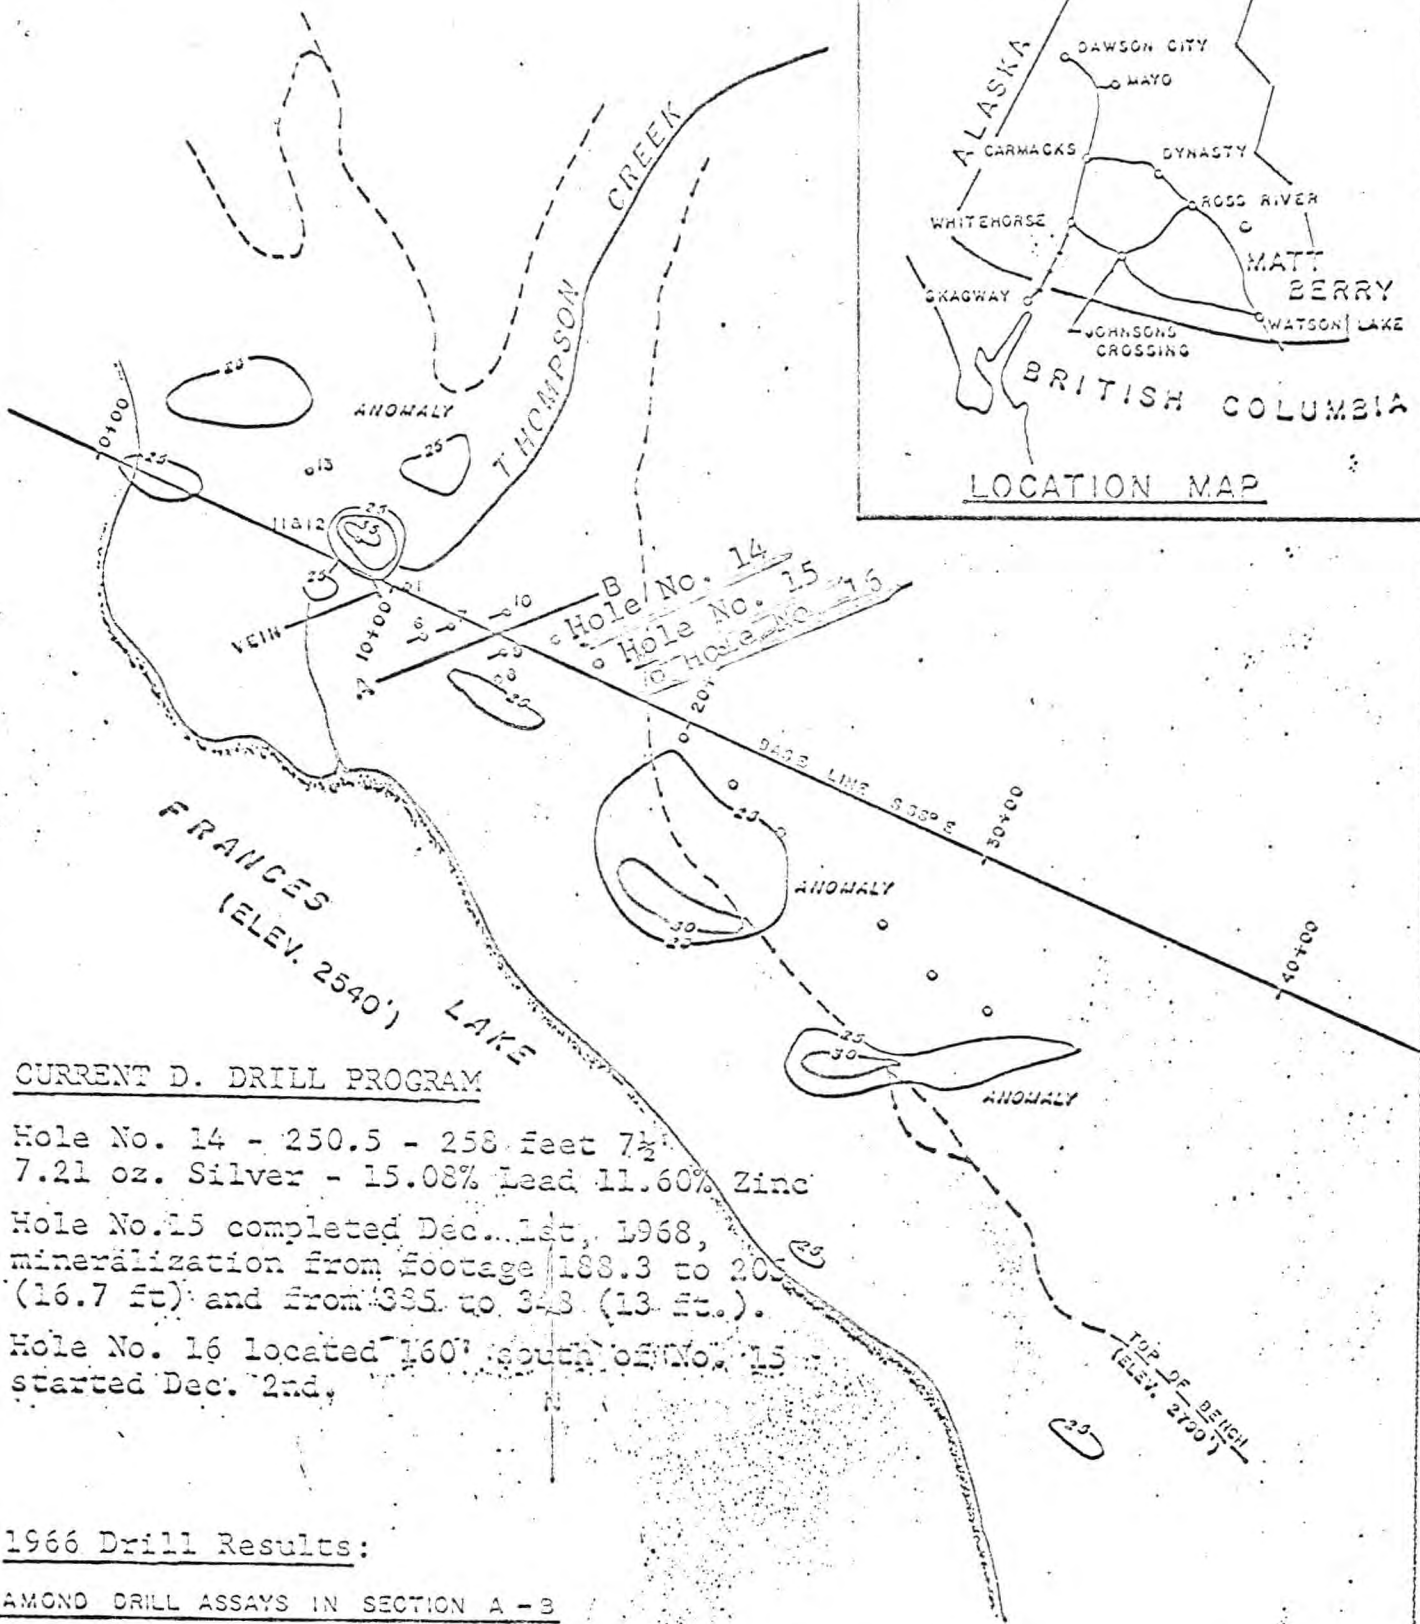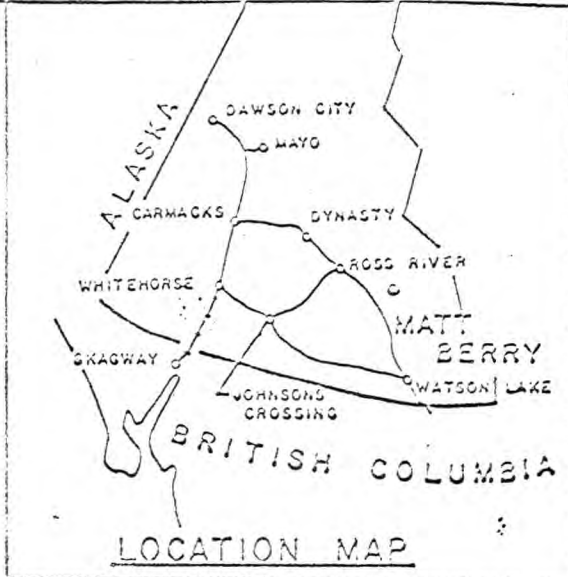

CURRENT D. DRILL PROGRAM

Hole No. 14 - 250.5 - 258 feet 7½
 7.21 oz. Silver - 15.08% Lead 11.60% Zinc

Hole No. 15 completed Dec. 1st, 1968,
 mineralization from footage 188.3 to 205
 (16.7 ft) and from 385. to 398 (13 ft.).


Hole No. 16 located 160' south of No. 15
 started Dec. 2nd.

1966 Drill Results:

DIAMOND DRILL ASSAYS IN SECTION A - B

HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3-0'	3-9	13-6	7-1
7	86'	11-5'	4-6	7-3	13-3
9	90-3'	5-5'	20-6	32-3	22-3
10	173'	6-0'	2-5	5-2	3-0
	179-5	3-0'	6-6	14-6	4-0
	202-5	2-5'	12-1	17-2	5-4

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 Location of Geophysical Anomalies
 and Diamond Drill Location
 Dec. 2nd 1968



MATT BERRY MINES LIMITED
SUITE 1102 - 347 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-0705

October 30, 1968

On the Company's 32 claim group on the east side of the East Arm of Frances Lake in the Yukon, drill equipment is now on the property for a start of work.

The 1966 field season drilling outlined Silver - Lead - Zinc mineralization for a distance of 750 feet along the hangwall and foot-wall contacts of a north-south shear in a phyllitic shale formation.

During August, 1968, a geophysical and geochemical survey was carried out in the area and along strike of the main Matt Zone. The Survey has outlined an anomalous area for a length of over 3,500 feet consisting of six separate anomalies, of which one overlies the previously drilled mineralization.

The immediate drill program is planned to extend the Matt Zone in the southerly direction where previously drilled mineralization assayed as follows:

Hole No. 6 depth of 34 feet - width of 3 feet assayed:
3.9 oz. Silver - 13.5% Lead - 7.1% Zinc

Hole No. 7 depth of 86 feet - width of 11½ feet assayed:
4.6 oz. Silver - 7.6% Lead - 13.3% Zinc.

Hole No. 9 depth of 90½ feet - width of 5½ feet assayed:
20.6 oz. Silver - 32.8% Lead - 22.3% Zinc.

Hole No. 10 depth of 173 feet - width of 6 feet assayed:
2.5 oz. Silver - 5.17% Lead - 3.0% Zinc.



" depth of 179½ feet - width of 3 feet assayed:
6.6 oz. Silver - 14.6% Lead - 4.0% Zinc.

" depth of 202½ feet - width of 2½ feet assayed:
12.1 oz. Silver - 17.2% Lead - 5.4% Zinc.

The first of a series of holes to be drilled in the current program will be No. 14 located on the southerly end of the Matt Zone which is expected to intersect the shear zone at about 300 feet vertically below surface.

The Treasury has received \$45,000.00 for the drill program through a current take-down of 150,000 treasury shares.

Leon La Prairie, P. Eng.
Managing Director

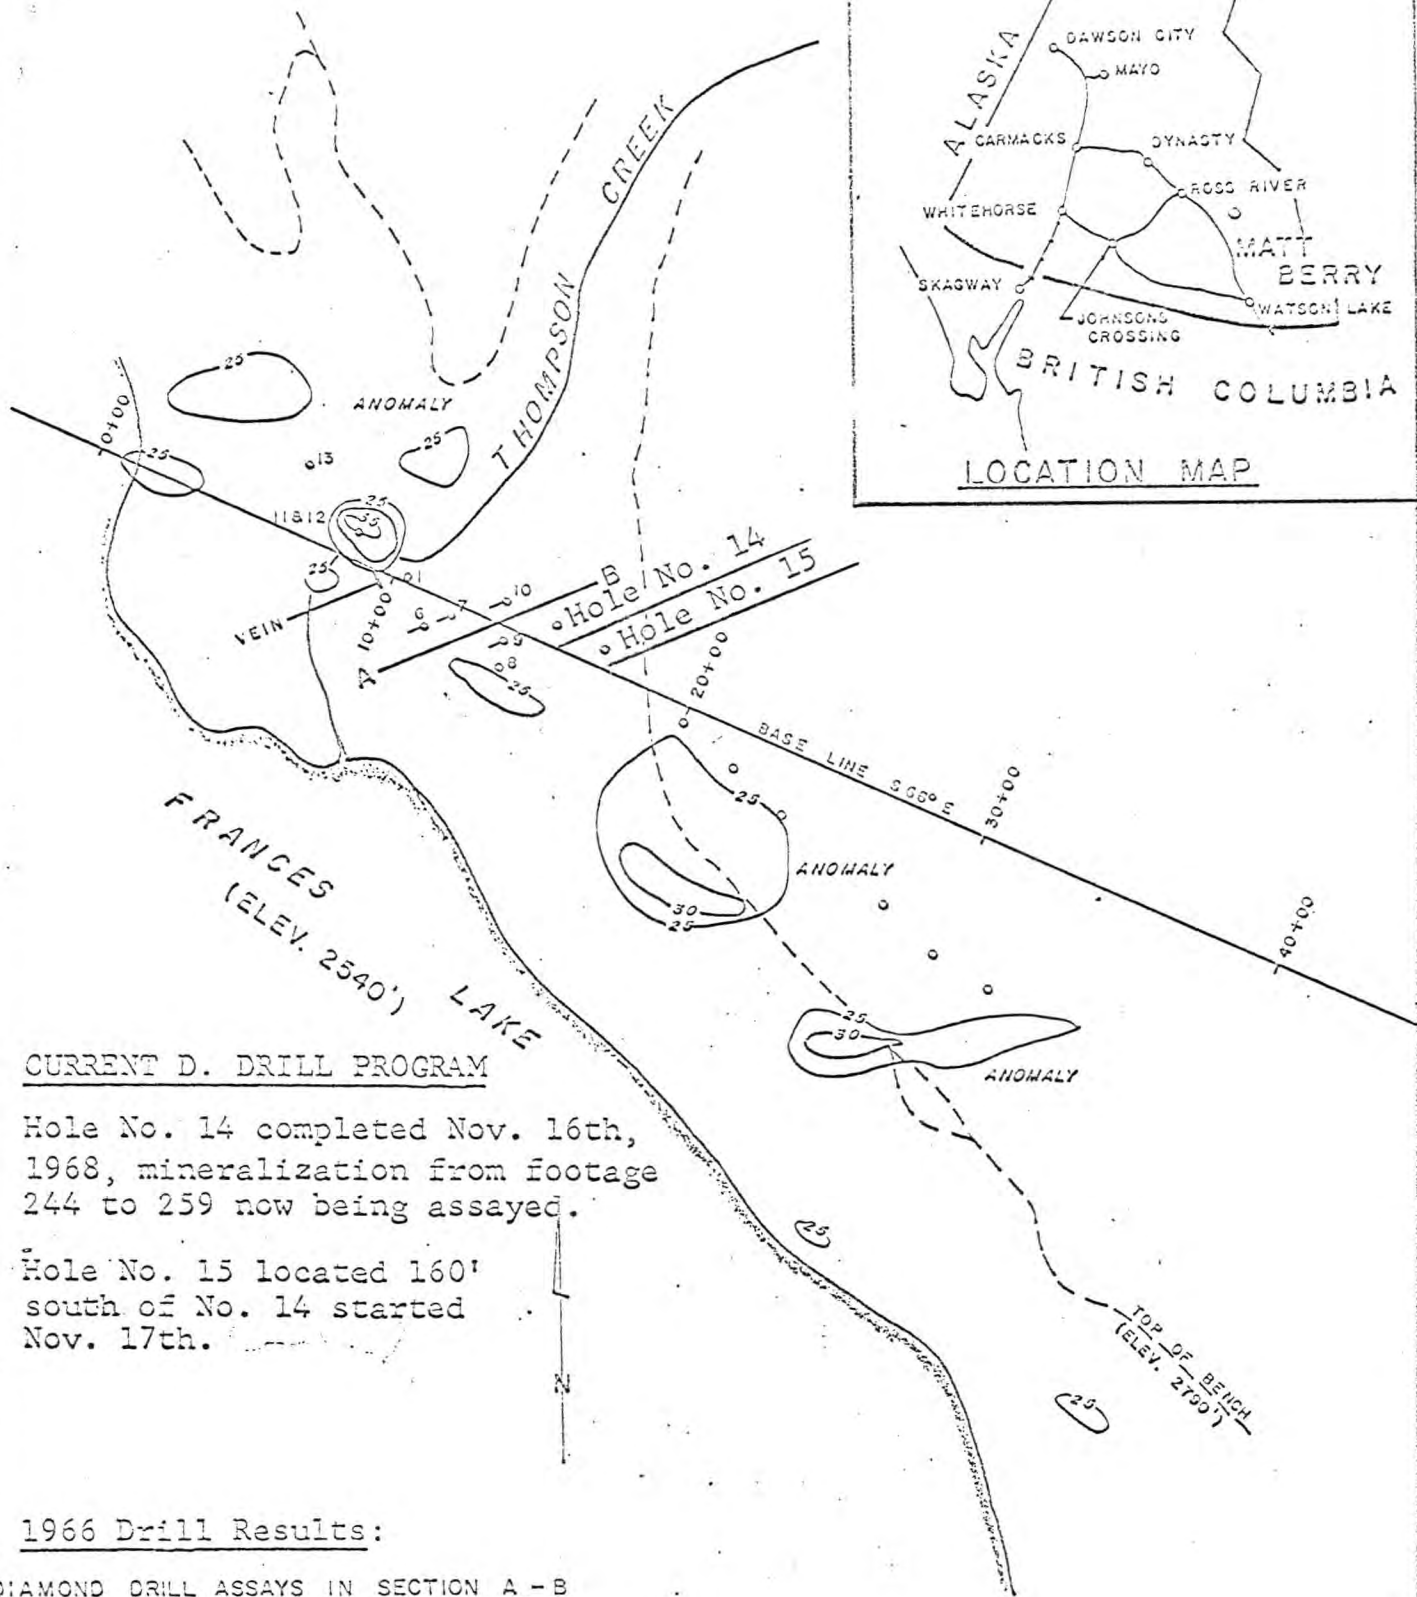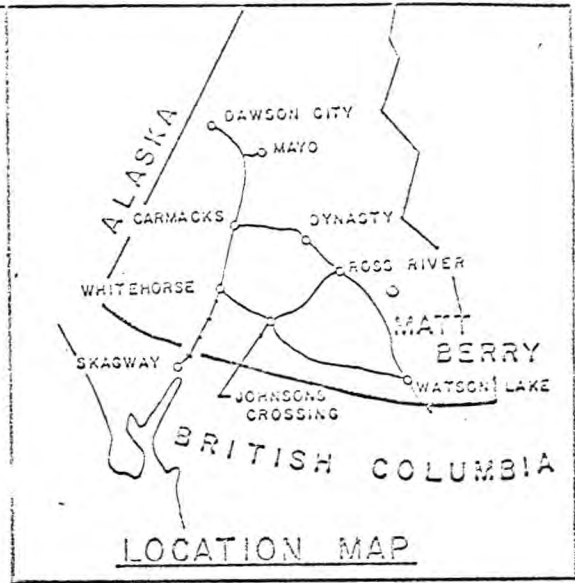

CURRENT D. DRILL PROGRAM

Hole No. 14 completed Nov. 16th, 1968, mineralization from footage 244 to 259 now being assayed.


Hole No. 15 located 160' south of No. 14 started Nov. 17th.

1966 Drill Results:

DIAMOND DRILL ASSAYS IN SECTION A - B

HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3.0'	3.9	13.5	7.1
7	86'	11.5'	4.6	7.6	13.3
9	90.5'	55'	20.6	32.8	22.3
10	173'	60'	2.5	5.2	3.0
	179.5'	3.0'	6.6	14.6	4.0
	202.5'	2.5'	12.1	17.2	5.4

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 Location of Geophysical Anomalies
 and Diamond Drill Location
 Nov. 18, 1968



SUITE 1102 - 347 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-9251

Pb, Zn,
Ag

MATT BERRY Mines Ltd
Francis Lake, Yukon

Property
105 H/6

1968-70

January 8, 1970

MATT BERRY MINES LIMITED


INFORMATION RELEASE

Assaying for Antimony content in surface and drill hole samples from the Matt Berry Mines Ltd. Francis Lake project in the Yukon shows this mineral to be present throughout the Matt Zone mineralization in varying amounts from minor values to 1% Antimony in surface trenching with 17.2 oz. Silver, 11.1% lead, 2.6% zinc along a length of 70 feet over a width of 22 inches and down the synclinal plunge in hole No. 25 at a depth of 460 feet with .91% Antimony and 3.7 oz. Silver, 6.36% lead, 11.48% zinc over a core intersection of 7 feet. In the mineralized sections the core recovery is in the order of 35% with stibnite mineralization (Antimony) expected the mineral most likely to be lost under the poor core recovery conditions. Antimony currently sells at \$1.05 per pound.

Hole No. 27 the latest in a series to be drilled has been suspended for the Yultide Season at 370 feet and will continue in the New Year. Hole No. 27 is the start of a step-out program and is expected to intersect the Matt Zone at about a depth of 650 feet. The property is located in the Yukon some 90 miles north of Watson Lake, about 12 miles east of the Ross River Highway.

The Company also has a block of 37 mineral claims in the Sturgeon Lake area of Northwestern Ontario which adjoins the west side of the Mattagami Lake Mines - Abitibi Paper Co. new Silver base metals discovery group.

Nat'l Berry

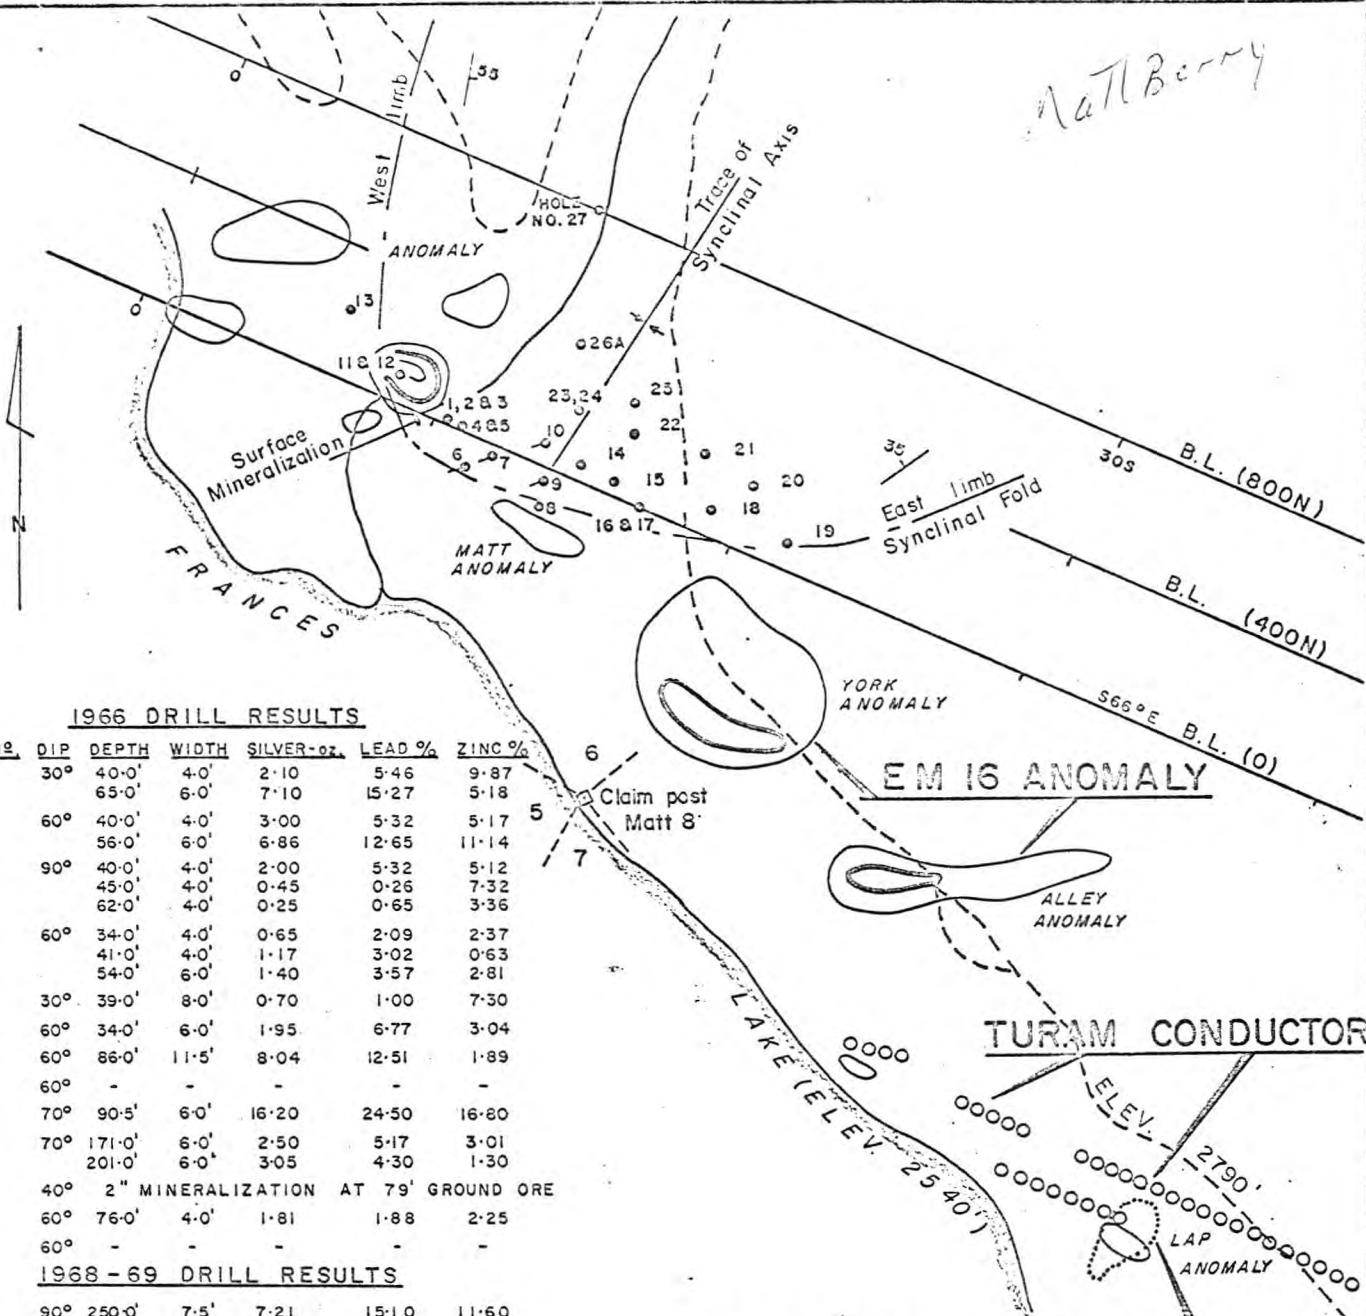

1966 DRILL RESULTS

HOLE NO.	DIP	DEPTH	WIDTH	SILVER-oz.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2-10	5-46	9-87
		65-0'	6-0'	7-10	15-27	5-18
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	6-0'	1-40	3-57	2-81
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	6-0'	1-95	6-77	3-04
		86-0'	11-5'	8-04	12-51	1-89
8	60°	-	-	-	-	-
9	70°	90-5'	6-0'	16-20	24-50	16-80
10	70°	171-0'	6-0'	2-50	5-17	3-01
		201-0'	6-0'	3-05	4-30	1-30
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

1968-69 DRILL RESULTS


H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	6-0'	2-35	4-70	4-25
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	326-0'	4-0'	2-38	7-06	4-56
		338-0'	4-0'	5-30	11-31	16-95
		345-0'	3-4'	3-67	7-00	4-5
		361-0'	5-6'	0-80	1-01	3-03
H-23	70°	285-0'	6-0'	2-50	4-80	10-30
H-24	90°	286-0'	6-0'	0-30	0-43	3-40
		399-8'	4-0'	2-10	7-45	6-19
H-25	70°	411-0'	2-0'	2-50	5-14	1-08
		474-5'	7-0'	3-70	6-36	11-48


1969-1970 DRILL RESULTS

H-26A	70°	422-0'	6-5'	0-84	3-56	3-55
H-27	NOW DRILLING ON BASE LINE 800N					

These diamond drill Silver-Lead-Zinc values occur in a stratiform structure which is being further drilled for mineralized extensions.

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE: Dec. 16, 1969



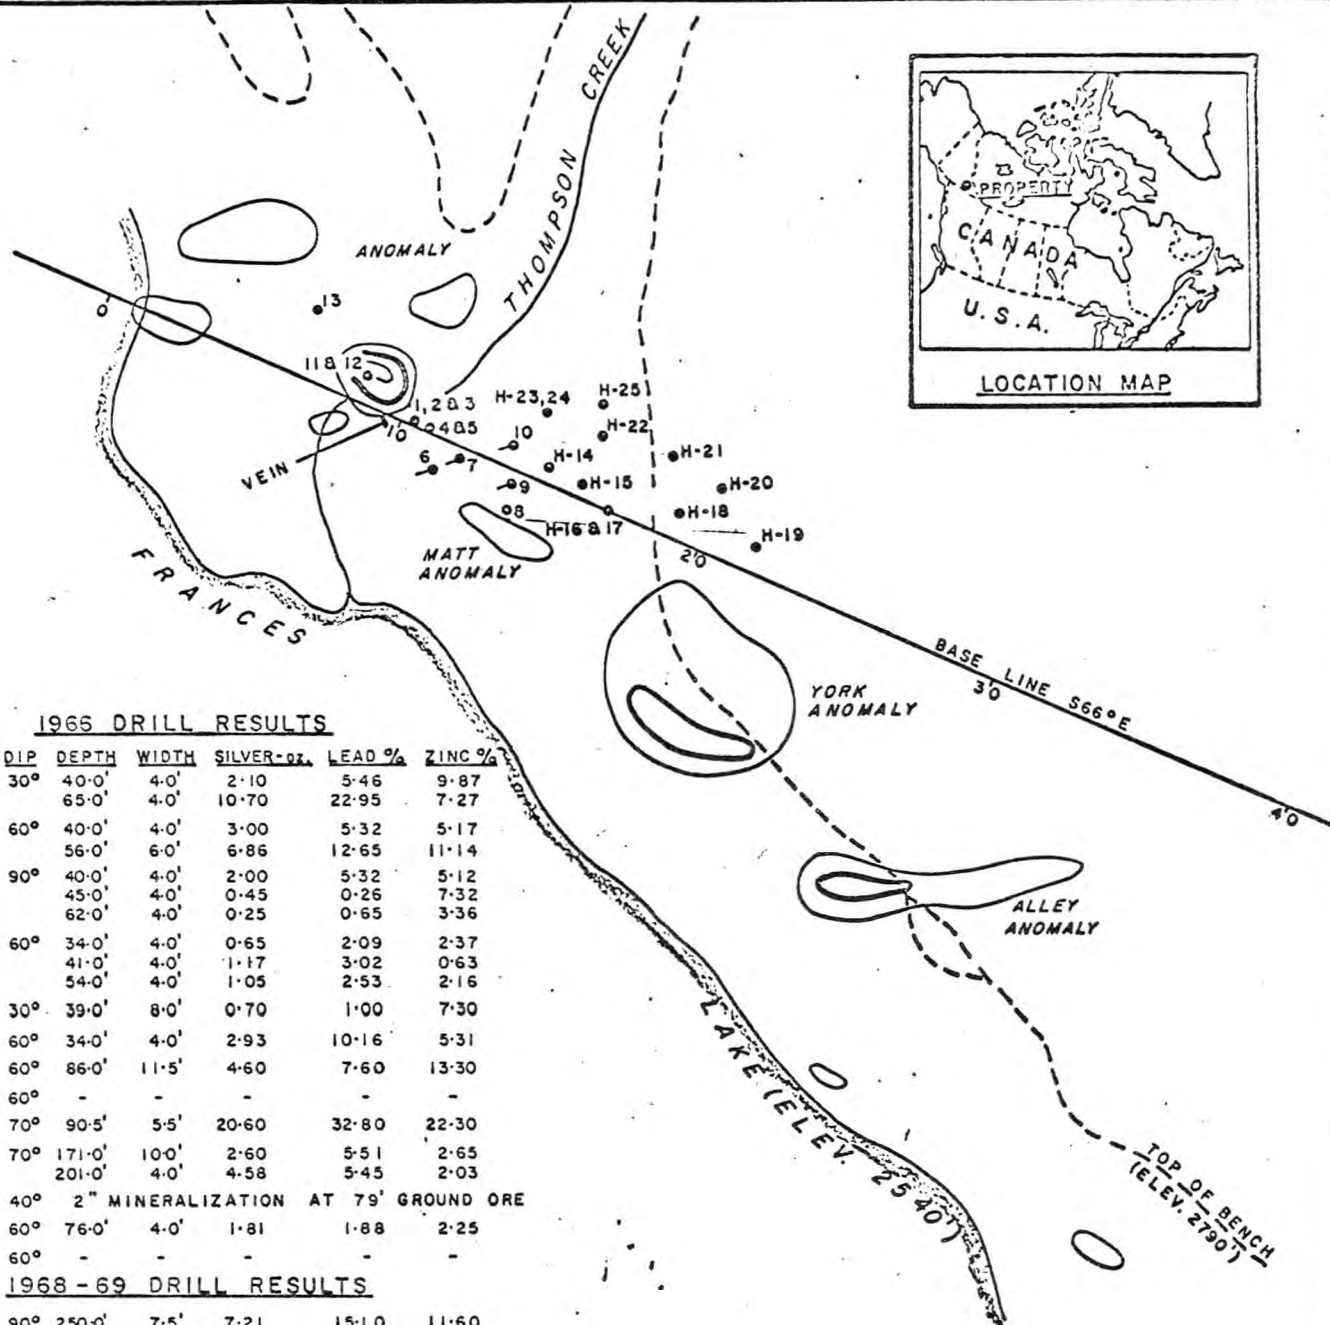

1965 DRILL RESULTS


HOLE NO.	DIP	DEPTH	WIDTH	SILVER-oz.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2-10	5-46	9-87
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
10	70°	171-0'	10-0'	2-60	5-51	2-65
		201-0'	4-0'	4-58	5-45	2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

1968-69 DRILL RESULTS

H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	4-8'	2-90	5-89	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	326-0'	4-0'	2-38	7-06	4-56
		338-0'	4-0'	5-30	11-31	16-95
		345-0'	3-4'	3-67	7-00	4-5
H-23	70°	285-0'	3-8'	4-14	8-00	17-90
H-24	90°	286-0'	4-0'	0-45	0-60	9-83
H-25	70°	399-8'	4-0'	2-10	7-45	6-19
		411-0'	2-0'	2-50	5-14	1-08
		474-5'	NOW BEING ASSAYED			

Presently line cutting is underway is preparation of a Turam Survey.

MATT BERRY MINES LTD.
WATSON LAKE, AREA, Y.T.
LOCATION OF GEOPHYSICAL ANOMALIES
& DIAMOND DRILL HOLES
DATE May 12, 1969



MATT BERRY MINES LIMITED

PROGRESS REPORT

Period ending April 31, 1969

SUMMARY

The Matt Berry Mines property holdings consist of 3 groups comprising of 83 unpatented mineral claims. The holdings are located 96 miles north of Walson Lake and some 12 miles east of the Ross River highway, Yukon Territory.

Since the start of exploration on the Matt Zone, field work has comprised of prospecting and trenching, a limited geochemical and geophysical survey and 6,192 feet of diamond drilling.

The current tonnage based on 24 completed drill holes is now indicated at an inferred 400,000 tons averaging 4.2 oz. silver per ton and 17% combined lead and zinc.

The "Matt Zone" is open on both the strike and depth extension. The Zone is near a granite-sedimentary contact which is the same regional structure that ore deposits are associated with in the Dynasty and Swin Lake area that is some 90 miles to the north of the Matt Berry holdings.

FILED ACTIVITIES

During the month of April, 1,334 feet of drilling was completed which consisted of holes No. 23, 24 and 25. The summary of the drilling is as follows:

<u>Hole No. 23</u>	at 75°
Depth	435 feet casing 47 feet
Location	14+00 Base Line, 2+00 N24°E, direction S39°W Elevation 2718
Objective	To probe the depth extension of the Matt Zone.
Results	The hole intersected the Matt Zone from 272 to 289.8' with mineralization occurring in two sections: from 274' to 275' and from 285' to 289.8.

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
274	1.0'	1.84	5.5	5.4
285	3.8	4.14	8.0	17.9

MATT BERRY MINES LIMITED

PROGRESS REPORT

FIELD ACTIVITIES (con't)

Hole No. 24 at 90°
Depth 409 feet Casing 32 feet
Location 14+00 Base Line 2+00 N24°E Elevation 2718
Objective To probe the depth extension of the Matt Zone
Results The Matt Zone mineralization was intersected at 286 feet to 289 feet and from 303 feet to 308 feet.

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
286.0	4.0	0.45	0.60	9.83

* * *

Hole No. 25 at 70°
Depth 500 feet Casing 56 feet
Location 15+60 Base line 3+50 N24°E Elevation 2743
Objective To probe the extension of the dip extension of Matt Zone
Results Intersected two mineralized sections:

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
399.8	4.0	2.10	7.45	6.19
411.0	2.0	2.50	5.14	1.08
474.5	Now being assayed			

* * *

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS - Hole 1 - 13 (1966)

<u>WIDTH</u>	<u>FROM</u>	<u>TO</u>	<u>SILVER</u>	<u>LEAD</u>	<u>ZINC</u>
<u>Hole No. 1 @ 30° - Section S-10 + 50</u>					
3.5 ft.	40.0	43.5	2.3 oz.	6.25	11.69
2 ft.	66.0	68.0	21.4 oz.	45.84	14.54
<u>Hole No. 2 @ 60° - Section S-10 + 50</u>					
2 ft.	38	40	6.1 oz.	10.65	10.34
5 ft.	57	62	7.9 oz.	16.34	13.01
<u>Hole No. 3 @ 90° - Section S 10 + 50</u>					
2 ft.	41	43	4.0 oz.	10.65	10.34
3 ft.	45.5	48½	.6 oz.	.3 %	9.79%
1 ft.	64.5	65.5	1.0 oz.	2.6	13.39%
<u>Hole No. 4 @ 60° - Section S 11+ 100</u>					
1 ft.	36	37	2.8 oz.	8.38	9.49
2 ft.	42	44	4.7 oz.	12.09	2.53
2 ft.	55	57	4.2 oz.	10.13	8.74
<u>Hole No. 5 @ 90° - Section S 10 + 50</u>					
8 ft.	39	47	.7	1.0 %	7.30%
<u>Hole No. 6 @ 60° - Section 11 + 50</u>					
3 ft.	34	37	3.9	13.54	7.08
<u>Hole No. 7 @ 60° - Section S 12 + 00</u>					
<u>Hole No. 8</u> NIL					
<u>Hole No. 9 @ 70° - Section S 15 + 50</u>					
1 ft.	61	62	8.6	13.7	2.3
2 ft.	77	79	.7	1.2	16.4
4.5 ft.	90.5	95.0	20.6	32.8	22.3
<u>Hole No. 10 @ 70° - Section S 13 + 00</u>					
10 ft.	171.0	181.0	2.62	5.51	2.56
1.5 ft.	202.5	204.0	12.2	17.2	5.4

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS - 1966 (con't)

Hole No. 11 @ 40° - Section 8 + 25

Two veins had been cut, one at 69 feet and one about 79 feet. Core recovery was extremely poor and the scattered mineralization recovered was not assayed.

Hole No. 12 @ 60° - Section 8 + 25

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
2½ ft.	78.5	81.0	2.9	3.0	3.6

The above intersection is from a fracture zone and appears to be the main MATT ZONE - recovery was extremely poor in area of the sulphides.

Hole No. 13 @ 90° - Section 6 + 10

No mineralized intersections were cut and it appears that the hole was set too far to the east to intersect the main MATT ZONE.

Holes No. 14 - 17 - 1968

Hole No. 14 @ 90° - Section 14 + 75

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
7.5	250.5	258.0	7.20	15.08	11.60

Hole No. 15 @ 90° - Section 16 + 50

4.8	191.5	196.3	2.93	5.87	5.35
-----	-------	-------	------	------	------

Hole No 16 @ 90° - Section 18 + 50

9.0	89.0	98.0	2.19	4.24	6.24
-----	------	------	------	------	------

Hole No. 17 @ 60° - Section 18 + 50

9.5'	63.0	79.0	.63 oz.	2.3%	7.9%
------	------	------	---------	------	------

Hole No. 18 @ 90° - Section 18 + 50 - start of 1969 drilling

3.0'	185'	188	1.0	1.71	1.48
	185'	246	Matt Zone - Scattered mineralization		

Hole No. 19 @ 90° - Section 21 + 50

2.6	117.3'	119.9	3.20	0.97	1.04
	108.5	152.1	Matt Zone - Scattered Mineralization		

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS 1968 (con't)

Hole No. 20 @ 90° - Section 20 + 00

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
	239'	350'	Matt Zone - Scattered mineralization		

Hole No. 21 @ 75° - Section 18+00

To be deepened

Hole No. 22 @ 75° Section 16+00

2.3	327.7	330.0	4.14	12.3	7.4
2.4	339.6	342.0	9.10	17.4	26.1
3.4	345.0	348.4	3.67	7.0	4.5

Hole No. 23 @ 75° - Section 14+00

3.8	286	289.8	4.14	8.00	17.9
-----	-----	-------	------	------	------

Hole No. 24 @ 90° Section 14 + 00

3.9	285.9	289.8	.46	.62	10.0
2.0	306.2	308.3	.62	1.30	10.3

Hole No. 25 @ 70° Section 15 + 60

4.0'	399.8	403.8	2.10	7.46	6.19
2.0	411.0	413.0	2.50	5.14	1.08
	474.5	now being assayed			

MATT BERRY MINES LIMITED

PROGRESS REPORT

1966 DILLING COMPLETED

Hole No. 66 - 1	-	12 foot casing	166' depth
66-2	-	15 foot casing	122' "
66-3	-	12 foot casing	71'
66-4	-	12 foot casing	141'
66-5	-	8 foot casing	93'
66-6	-	34 foot casing	148'
66-7	-	25 foot casing	25'
66-7A	-	56 foot casing	141'
66-8	-	25 foot casing	178'
66-9	-	18 foot casing	18'
66-10	-	12 BX casing	246'
66-11	-	12 foot casing	194'
66-12	-	10 foot casing	100'
66-13	-	32 foot casing	279'
66-14	-	42 foot casing	<u>69'</u> (hole frozen in)

Total footage drilled in 1966 - 1,991'

1968 DRILLING COMPLETED

Hole No. 66-14	-	42 foot casing	205' in December
68-15	-	61.5 foot casing	421'
68-16	-	31.5 foot casing	112'.
68-17	-	37.0 foot casing	<u>37.0'</u>

Total footage drilled in 1968 775.0'

1969 DRILLING COMPLETED

Hole No. 68-17	-	see above	78
69-18	-	93.0 foot casing	331'
69-19	-	82.0 foot casing	407'
69-20	-	117 foot casing	433'
69-21	-	110 foot casing	340'
69-22	-	77 foot casing	503'
69-23	-	47 foot casing	425'
69-24	-	32 foot casing	409'
69-25	-	63 foot casing	<u>500'?</u>

Total footage drilled in 1969 3,426'

Total footage drilled to date 6,192'

MATT BERRY MINES LIMITED

PROGRESS REPORT

SUMMARY OF CLAIMHOLDINGS

Frances Lake - Watson Lake Mining Division, Yukon Territory

<u>RECORDED</u>	<u>CLAIMS</u>	<u>REGISTRATION</u>	<u>STATUS</u>	<u>EXPIRY</u>
Matt 1 - 8 86874-82	8	Matt Berry	Unpatented	Jan. 7, 1971
Jim 1 - 4 86882-85	4	Matt Berry	Unpatented	Jan. 7, 1971
Berry 1-8 7688-95	8	"	"	"
Berry 15-20 7702-07	6	"	"	"
Berry 25-30 7712-17	6	"	"	"
Yoshi 8 - 28 28935-55	21	L. La Prairie	"	Feb. 19, 1970
Yoshi 37-46 28964-73	10	"	"	"
Sam 1-20 28986-29005	<u>20</u>	"	"	"
	83			

MATT BERRY MINES LIMITED


PROGRESS REPORT

COMPANY SHARE DATA SUMMARY

1) <u>Issued Shares (Qualified for trading)</u>		<u>Monies Received</u>
Free Vendor	75,000	\$ -
Barclay & Crawford Ltd. (1966)	200,000	50,000.00
La Prairie 1966 management option	100,000	25,000.00
York 1966 management option	20,000	5,000.00
1968 Underwriting	100,000	30,000.00
	100,000	35,000.00
	50,000	20,000.00
La Prairie 1968 management option	50,000	15,000.00
A. Arsenault 1968 qualification	38,500	9,625.00
P. Smith - employee service	3,000	750.00
2) <u>Issued shares (to be qualified)</u>		
La Prairie 1968 management option	50,000	15,000.00
Manifold 1968 management option	25,000	10,500.00
3) <u>Management option</u>		
Manifold @ 25¢ - expires June 30/71	15,000	
Vendor escrowed - Datlasaka Mines	290,000	
- 1966 underwriting	<u>135,000</u>	
	425,000	<u>\$215,875.00</u>
Total shares issued and optioned	1,261,500	

SUMMARY

Capitalization	5,000,000
Issued trading	736,500
Issued escrowed	425,000
Management option	15,000
To be qualified	85,000
Treasury shares	3,741,500

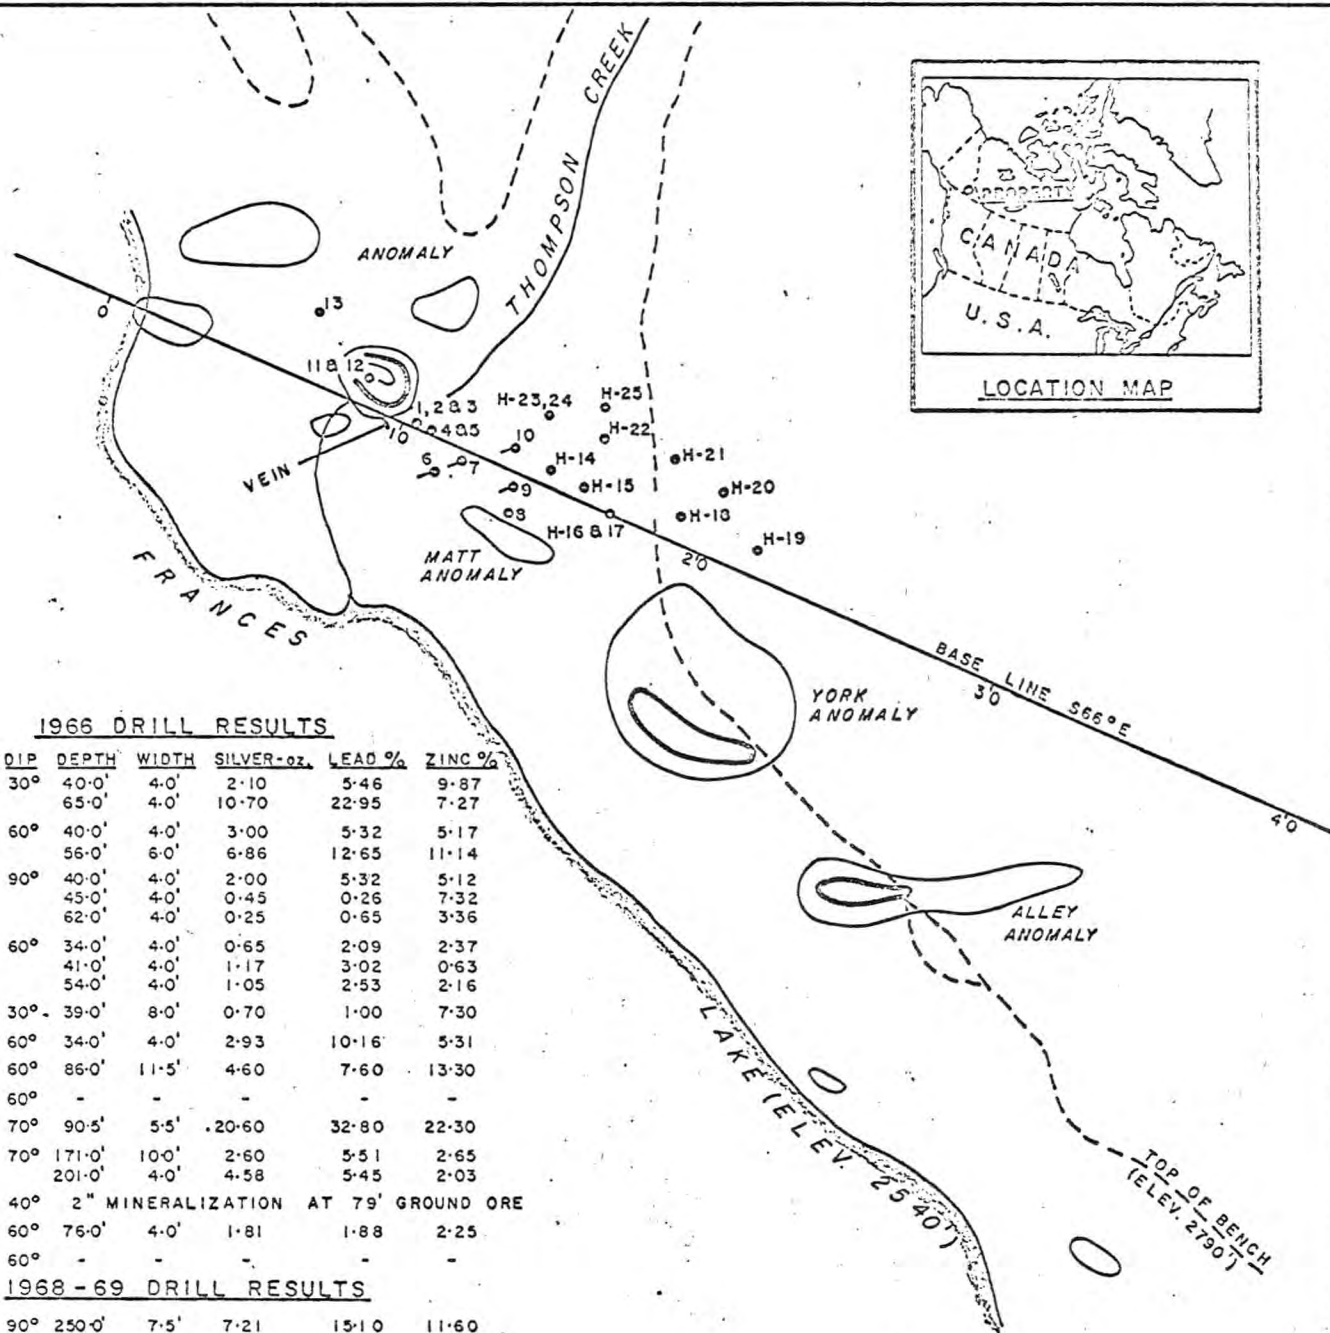


1966 DRILL RESULTS



HOLE NO.	DIP	DEPTH	WIDTH	SILVER-oz.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2-10	5-46	9-87
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
10	70°	171-0'	100'	2-60	5-51	2-65
		201-0'	4-0'	4-58	5-45	2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

1968-69 DRILL RESULTS

H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	4-8'	2-90	5-89	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	325-0'	4-0'	2-38	7-06	4-56
		338-0'	4-0'	5-30	11-31	16-95
		345-0'	3-4'	3-67	7-00	4-5
H-23	70°	285-0'	3-8'	4-14	8-00	17-90
H-24	90°	286-0'	4-0'	0-45	0-60	9-83
H-25	NOW BEING ASSAYED					

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE May 1, 1969



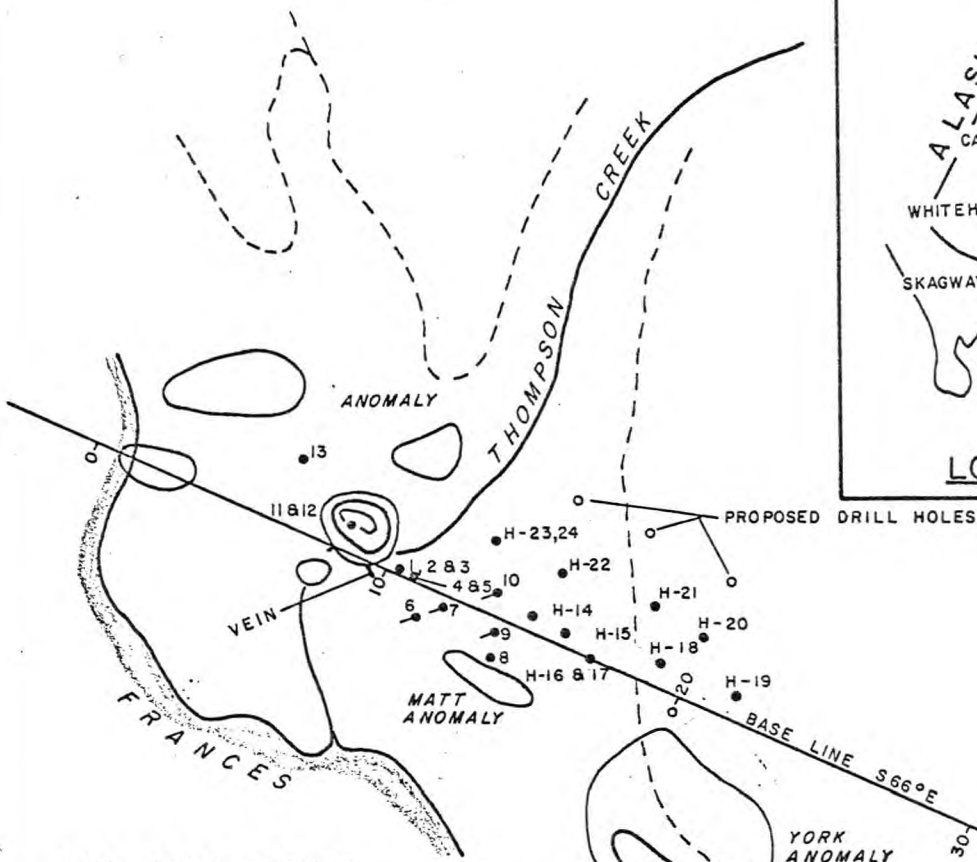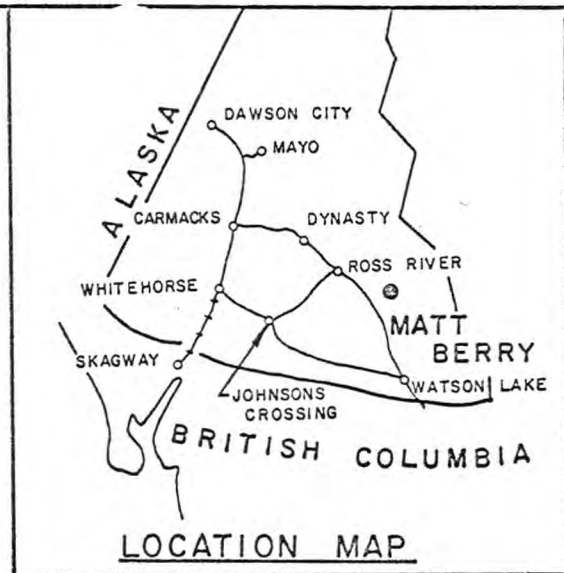


1966 DRILL RESULTS



HOLE NO.	DIP	DEPTH	WIDTH	SILVER-OZ.	LEAD %	ZINC%
1	30°	40-0'	4-0'	2-10	5-46	9-87
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-18
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
10	70°	171-0'	10-0'	2-60	5-51	2-65
		201-0'	4-0'	4-58	5-45	2-03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	78-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

1968 - 1969 DRILL RESULTS

H-14	90°	250-5'	7-5'	7-21	15-1	11-6
H-15	90°	191-5'	4-8'	2-90	5-87	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-3'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	Zone Indefinite			
H-21	75°	340-0'	Lost hole - Caving - to be re-drilled			
H-22	75°	326-0'	4-0'	2-38	7-06	4-56
		338-0'	4-0'	5-30	11-31	16-95
H-23	70°	285-0'	3-8'	4-14	8-00	17-90
H-24	90°	now being assayed				
H-25		now being drilled				

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE April 25, 1969.



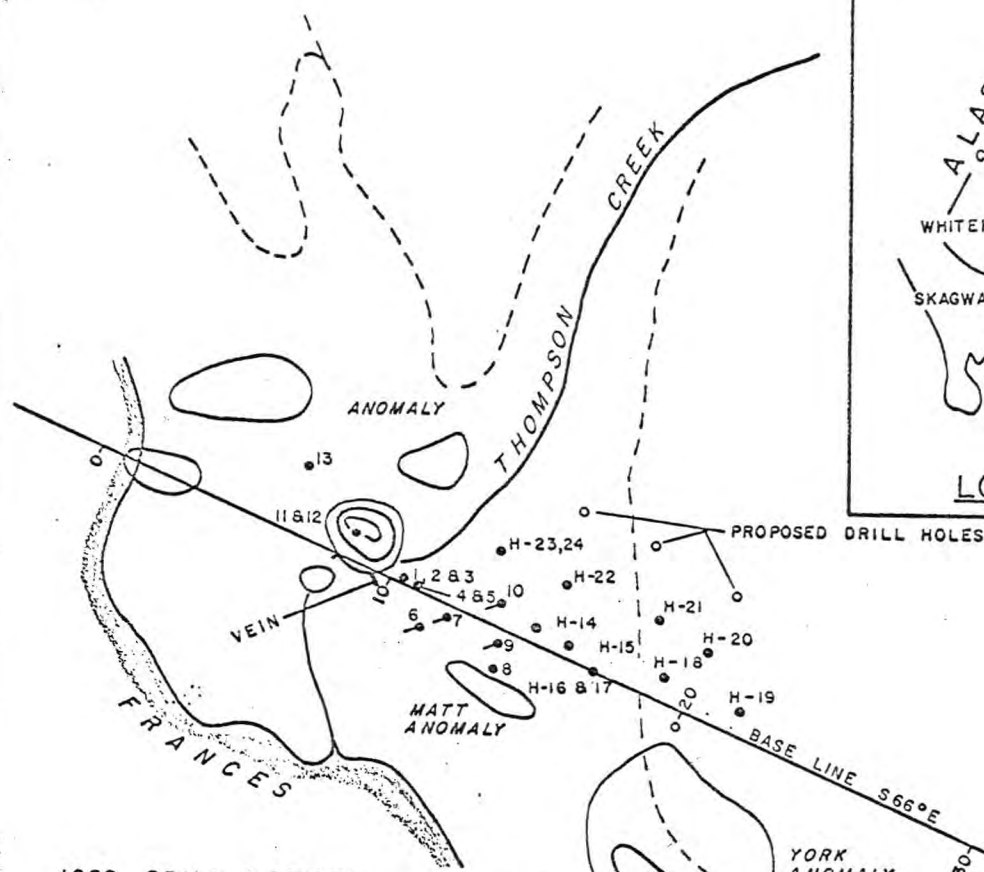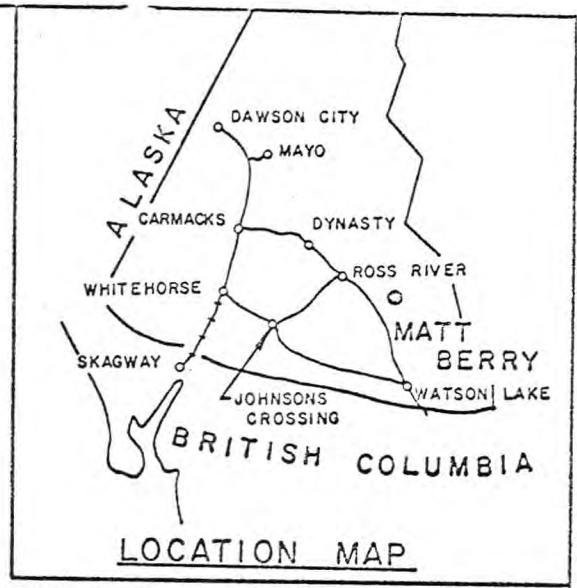


1966 DRILL RESULTS



HOLE NO.	DIP	DEPTH	WIDTH	SILVER-OZ.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2.10	5.46	9.87
		65-0'	4-0'	10.70	22.95	7.27
2	60°	40-0'	4-0'	3.00	5.32	5.17
		56-0'	6-0'	6.86	12.65	11.14
3	90°	40-0'	4-0'	2.00	5.32	5.12
		45-0'	4-0'	0.45	0.26	7.32
		62-0'	4-0'	0.25	0.65	3.36
4	60°	34-0'	4-0'	0.65	2.09	2.37
		41-0'	4-0'	1.17	3.02	0.63
		54-0'	4-0'	1.05	2.53	2.18
5	30°	39-0'	8-0'	0.70	1.00	7.30
6	60°	34-0'	4-0'	2.93	10.16	5.31
		86-0'	11.5'	4.60	7.60	13.30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20.60	32.80	22.30
		171-0'	10-0'	2.60	5.51	2.65
10	70°	201-0'	4-0'	4.58	5.45	2.03
		2" MINERALIZATION AT 79' GROUND ORE				
12	60°	78-0'	4-0'	1.81	1.88	2.25
13	68°	-	-	-	-	-

1968 - 1969 DRILL RESULTS

H-14	90°	250-5'	7-5'	7.21	15.1	11.6
H-15	90°	191-5'	4-8'	2.90	5.87	5.35
H-16	90°	89-0'	9-0'	2.19	4.24	6.24
H-17	60°	63-0'	9.5'	0.63	2.30	7.50
H-18	90°	185-0'	3-0'	1.00	1.71	1.48
H-19	90°	117-3'	2-6'	3.20	0.97	1.04
H-20	90°	349-0'	Zone	Indefinite		
H-21	75°	340-0'	Lost hole - Caving - to be re-drilled			
H-22	75°	326-0'	4-0'	2.38	7.06	4.56
		338-0'	4-0'	5.30	11.31	16.95
H-23	70°	now being assayed				
H-24	90°	now being drilled				

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE April 16, 1969



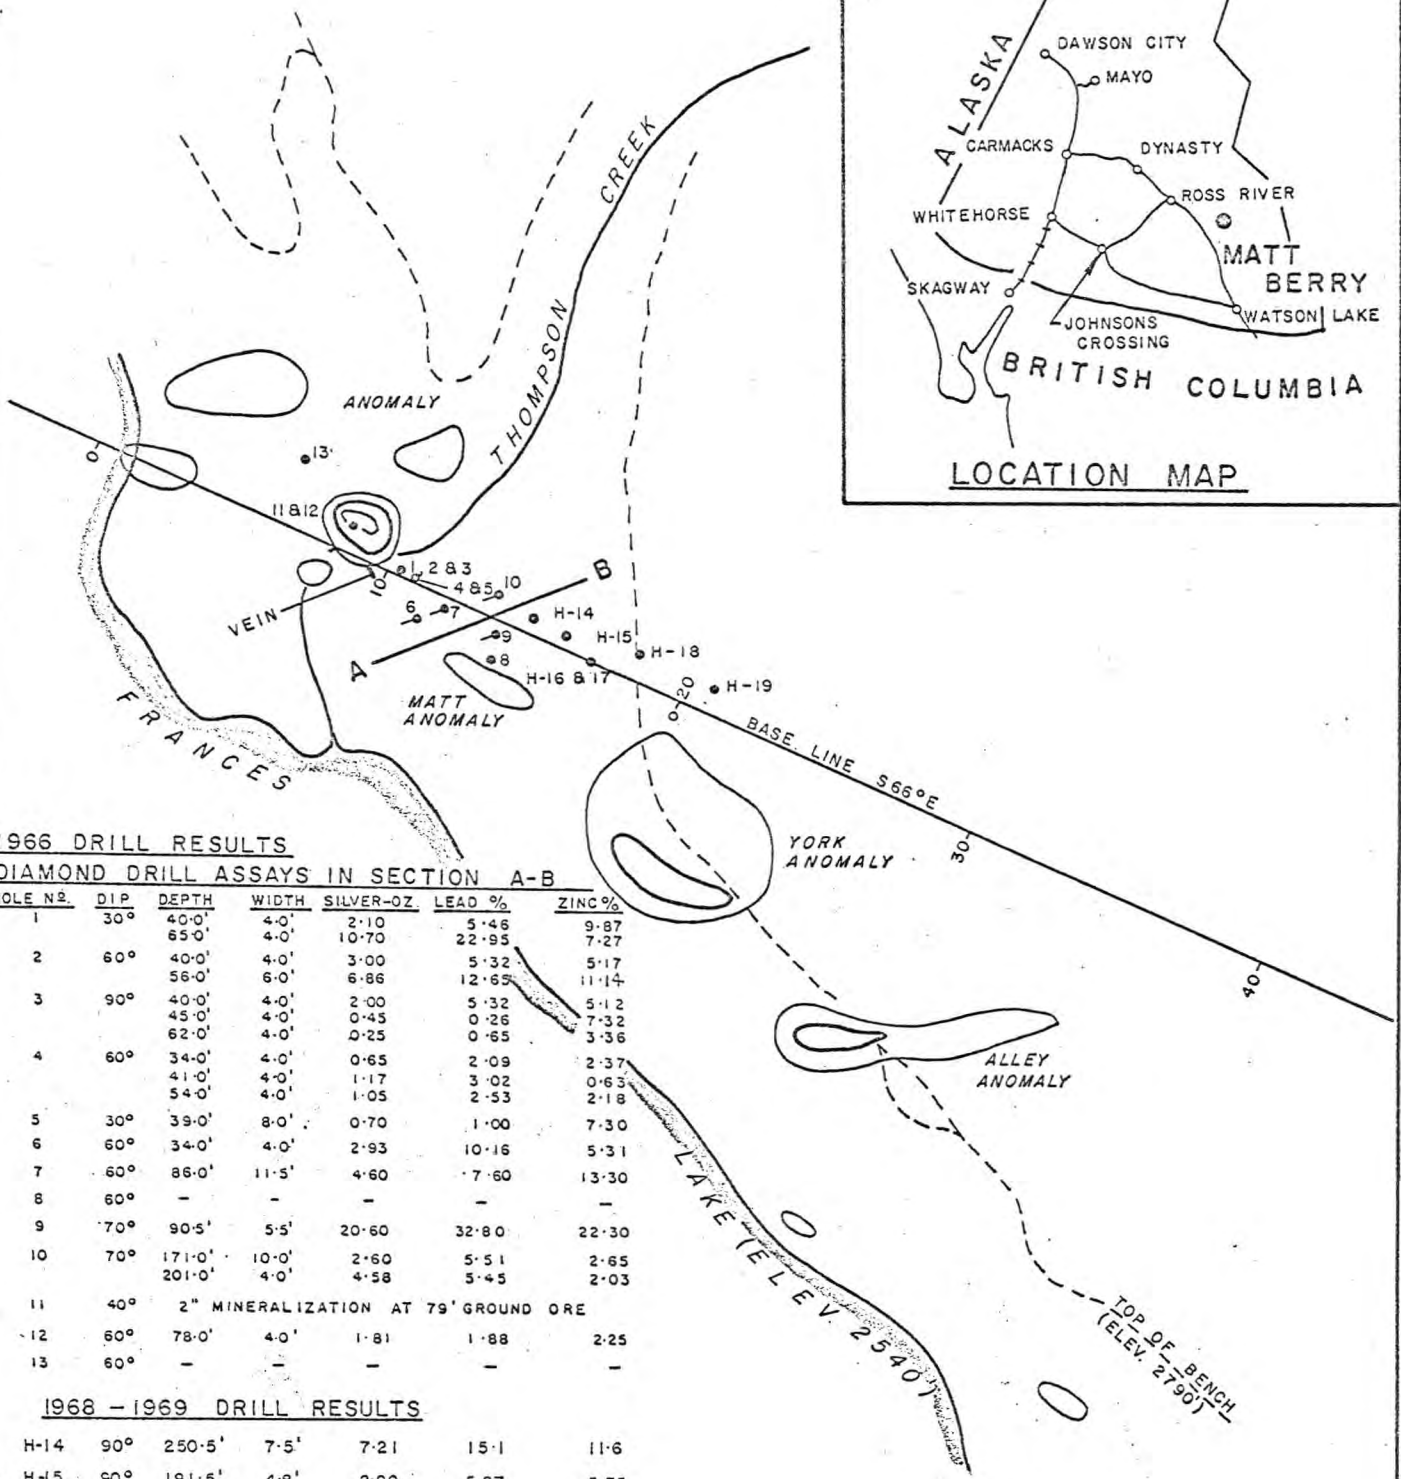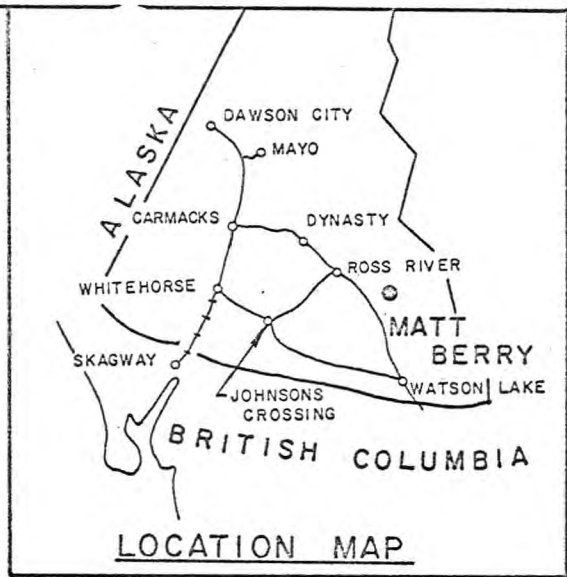

1966 DRILL RESULTS

DIAMOND DRILL ASSAYS IN SECTION A-B


HOLE NO.	DIP	DEPTH	WIDTH	SILVER-OZ	LEAD %	ZINC%
1	30°	40'-0"	4'-0"	2.10	5.46	9.87
		65'-0"	4'-0"	10.70	22.95	7.27
2	60°	40'-0"	4'-0"	3.00	5.32	5.17
		56'-0"	6'-0"	6.86	12.65	11.14
3	90°	40'-0"	4'-0"	2.00	5.32	5.12
		45'-0"	4'-0"	0.45	0.26	7.32
		62'-0"	4'-0"	0.25	0.65	3.36
4	60°	34'-0"	4'-0"	0.65	2.09	2.37
		41'-0"	4'-0"	1.17	3.02	0.63
		54'-0"	4'-0"	1.05	2.53	2.18
5	30°	39'-0"	8'-0"	0.70	1.00	7.30
6	60°	34'-0"	4'-0"	2.93	10.16	5.31
7	60°	86'-0"	11'-5"	4.60	7.60	13.30
8	60°	-	-	-	-	-
9	70°	90'-5"	5'-5"	20.60	32.80	22.30
10	70°	171'-0"	10'-0"	2.60	5.51	2.65
		201'-0"	4'-0"	4.58	5.45	2.03
11	40°	2" MINERALIZATION AT 79' GROUND ORE				
12	60°	78'-0"	4'-0"	1.81	1.88	2.25
13	60°	-	-	-	-	-



1968 - 1969 DRILL RESULTS

H-14	90°	250'-5"	7'-5"	7.21	15.1	11.6
H-15	90°	191'-5"	4'-8"	2.90	5.87	5.35
H-16	90°	89'-0"	9'-0"	2.19	4.24	6.24
H-17	60°	63'-0"	0'-6"	2.30	2.30	7.90

H-18 90° completed - mineralization being assayed

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DATE: Feb. 20, 1969



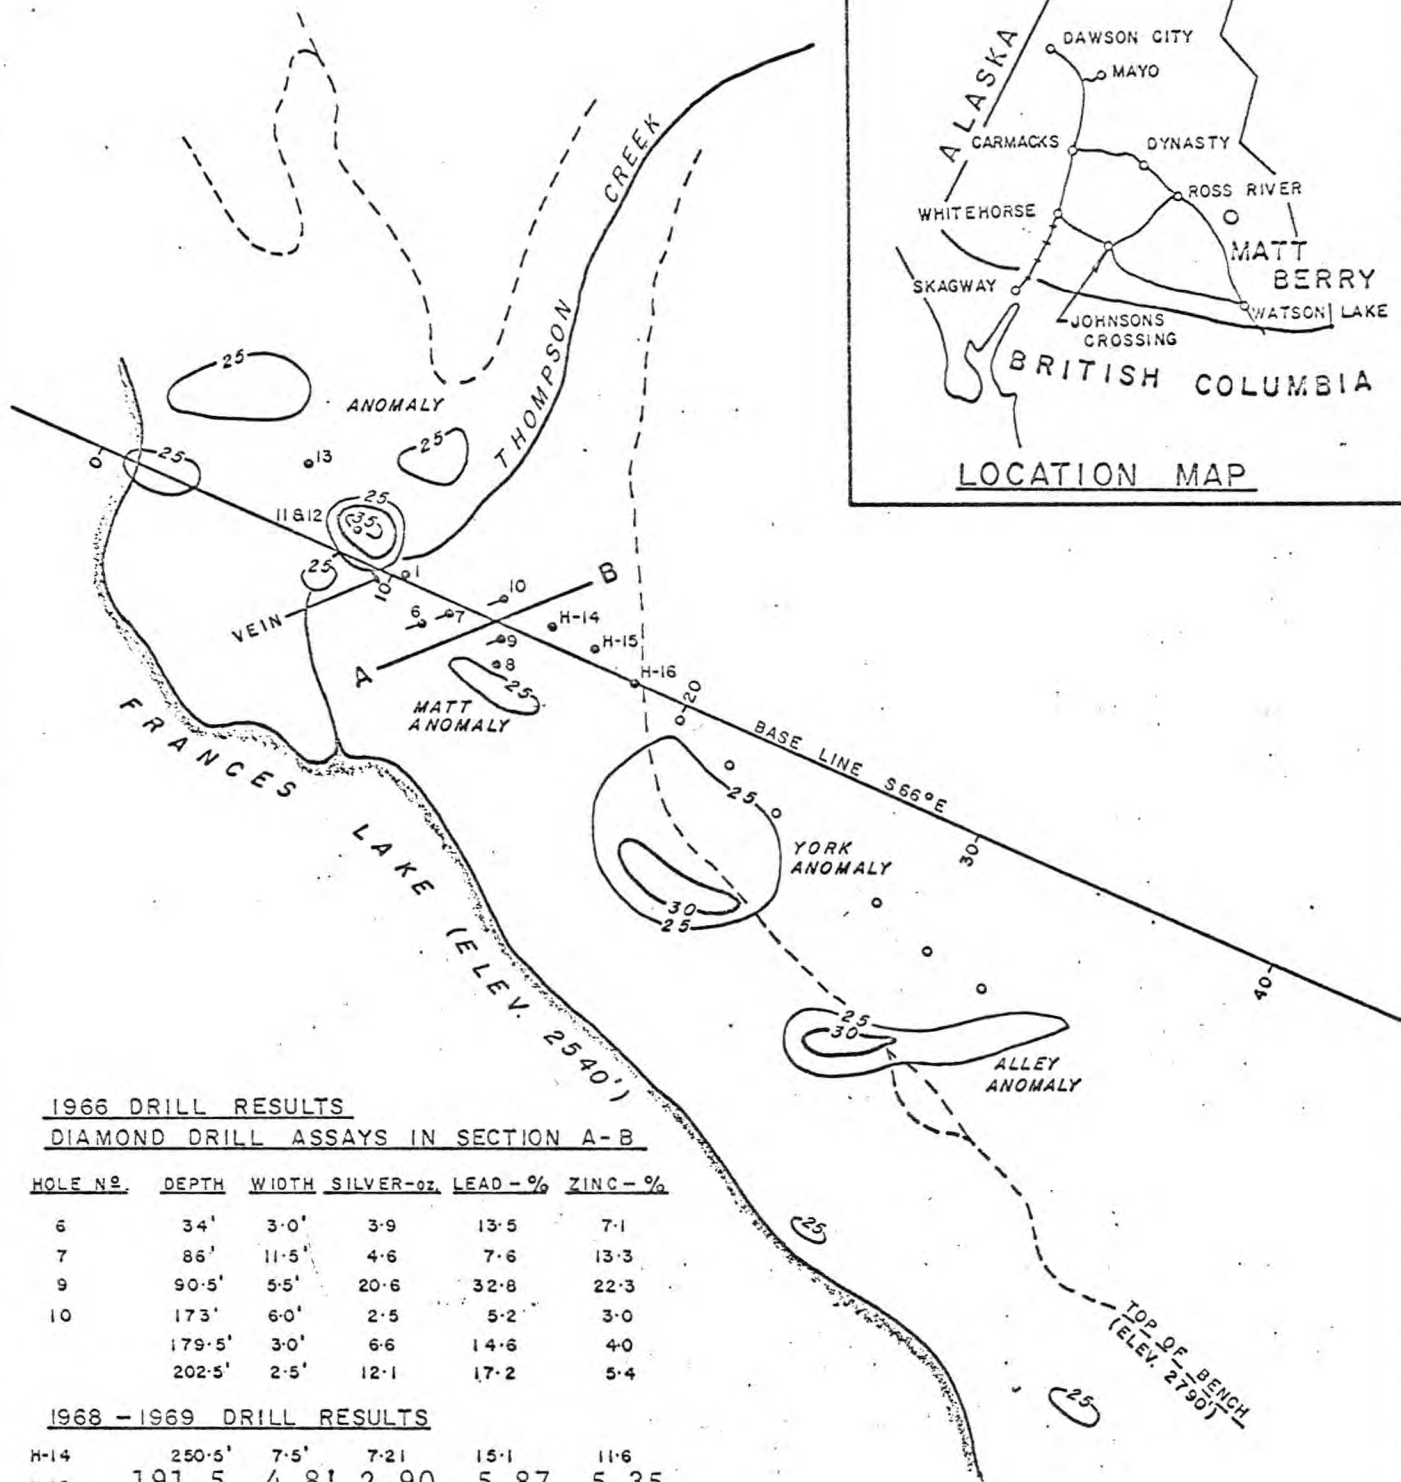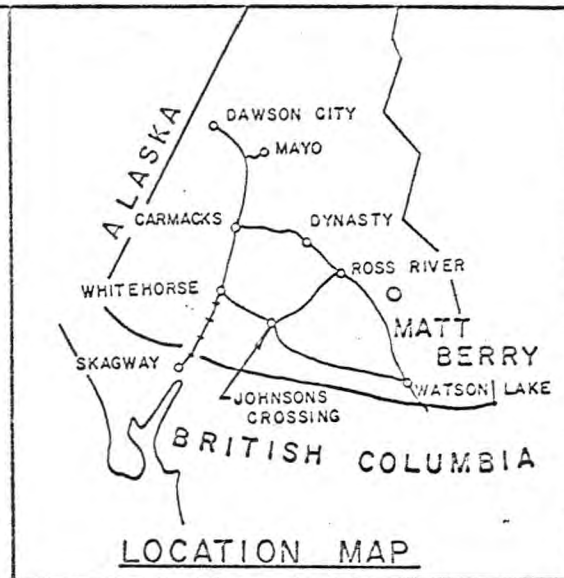

1966 DRILL RESULTS

DIAMOND DRILL ASSAYS IN SECTION A-B


HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3-0'	3.9	13.5	7.1
7	86'	11-5'	4.6	7.6	13.3
9	90-5'	5-5'	20.6	32.8	22.3
10	173'	6-0'	2.5	5.2	3.0
	179-5'	3-0'	6.6	14.6	4.0
	202-5'	2-5'	12.1	17.2	5.4



1968 - 1969 DRILL RESULTS

H-14 250-5' 7-5' 7.21 15.1 11.6
 H-15 191.5 4.8' 2.90 5.87 5.35
 H-16 (Vertical) completed Dec. 7th, 1968,
 mineralized section between 189' and 198'
 now being assayed.

H-17 (Angle Hole) started drilling Dec. 8th -
 same drill location as No. 16.

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 LOCATION OF GEOPHYSICAL ANOMALIES
 & DIAMOND DRILL HOLES
 DEC 9 '68



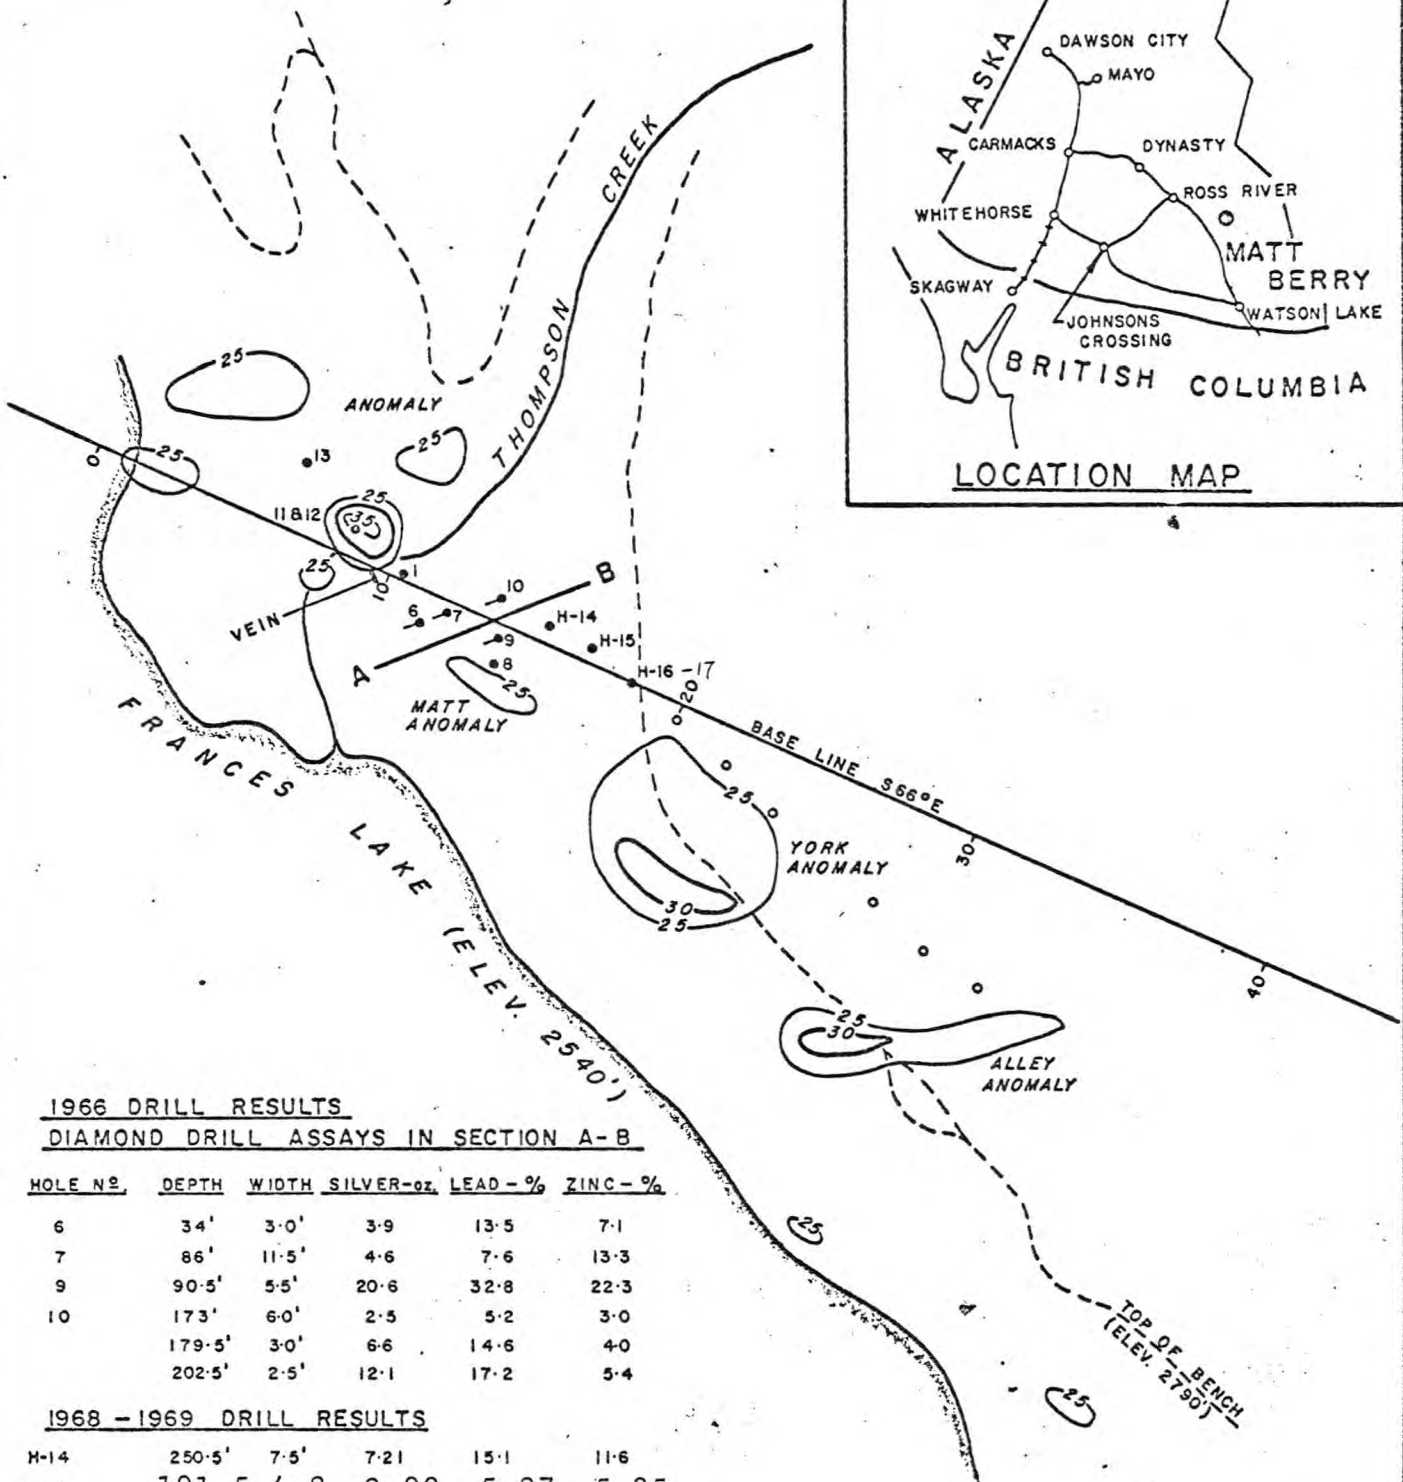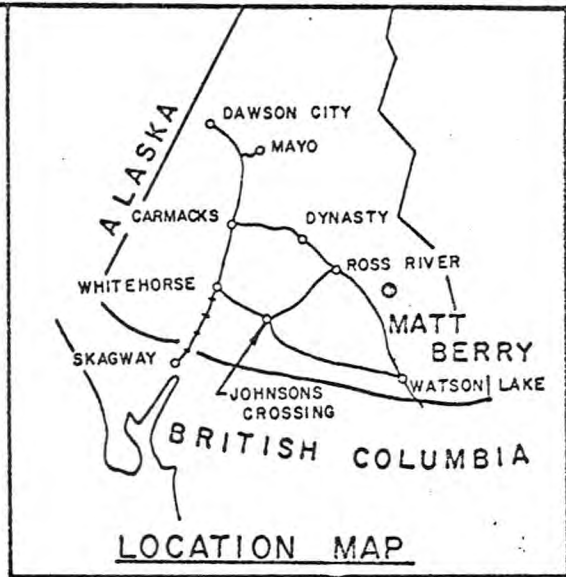

1966 DRILL RESULTS
DIAMOND DRILL ASSAYS IN SECTION A-B


HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3-0'	3.9	13.5	7.1
7	86'	11.5'	4.6	7.6	13.3
9	90.5'	5.5'	20.6	32.8	22.3
10	173'	6.0'	2.5	5.2	3.0
	179.5'	3.0'	6.6	14.6	4.0
	202.5'	2.5'	12.1	17.2	5.4



1968 - 1969 DRILL RESULTS

H-14	250.5'	7.5'	7.21	15.1	11.6
H-15	191.5	4.8	2.90	5.87	5.35
H-16	89.0	9.0	2.19	4.24	6.24
or	91.6	6.4	2.93	5.76	9.09

H-17 Collared - stopped - to resume January 6 1969

MATT BERRY MINES LTD.
WATSON LAKE, AREA, Y.T.
LOCATION OF GEOPHYSICAL ANOMALIES
& DIAMOND DRILL HOLES
DEC 1768



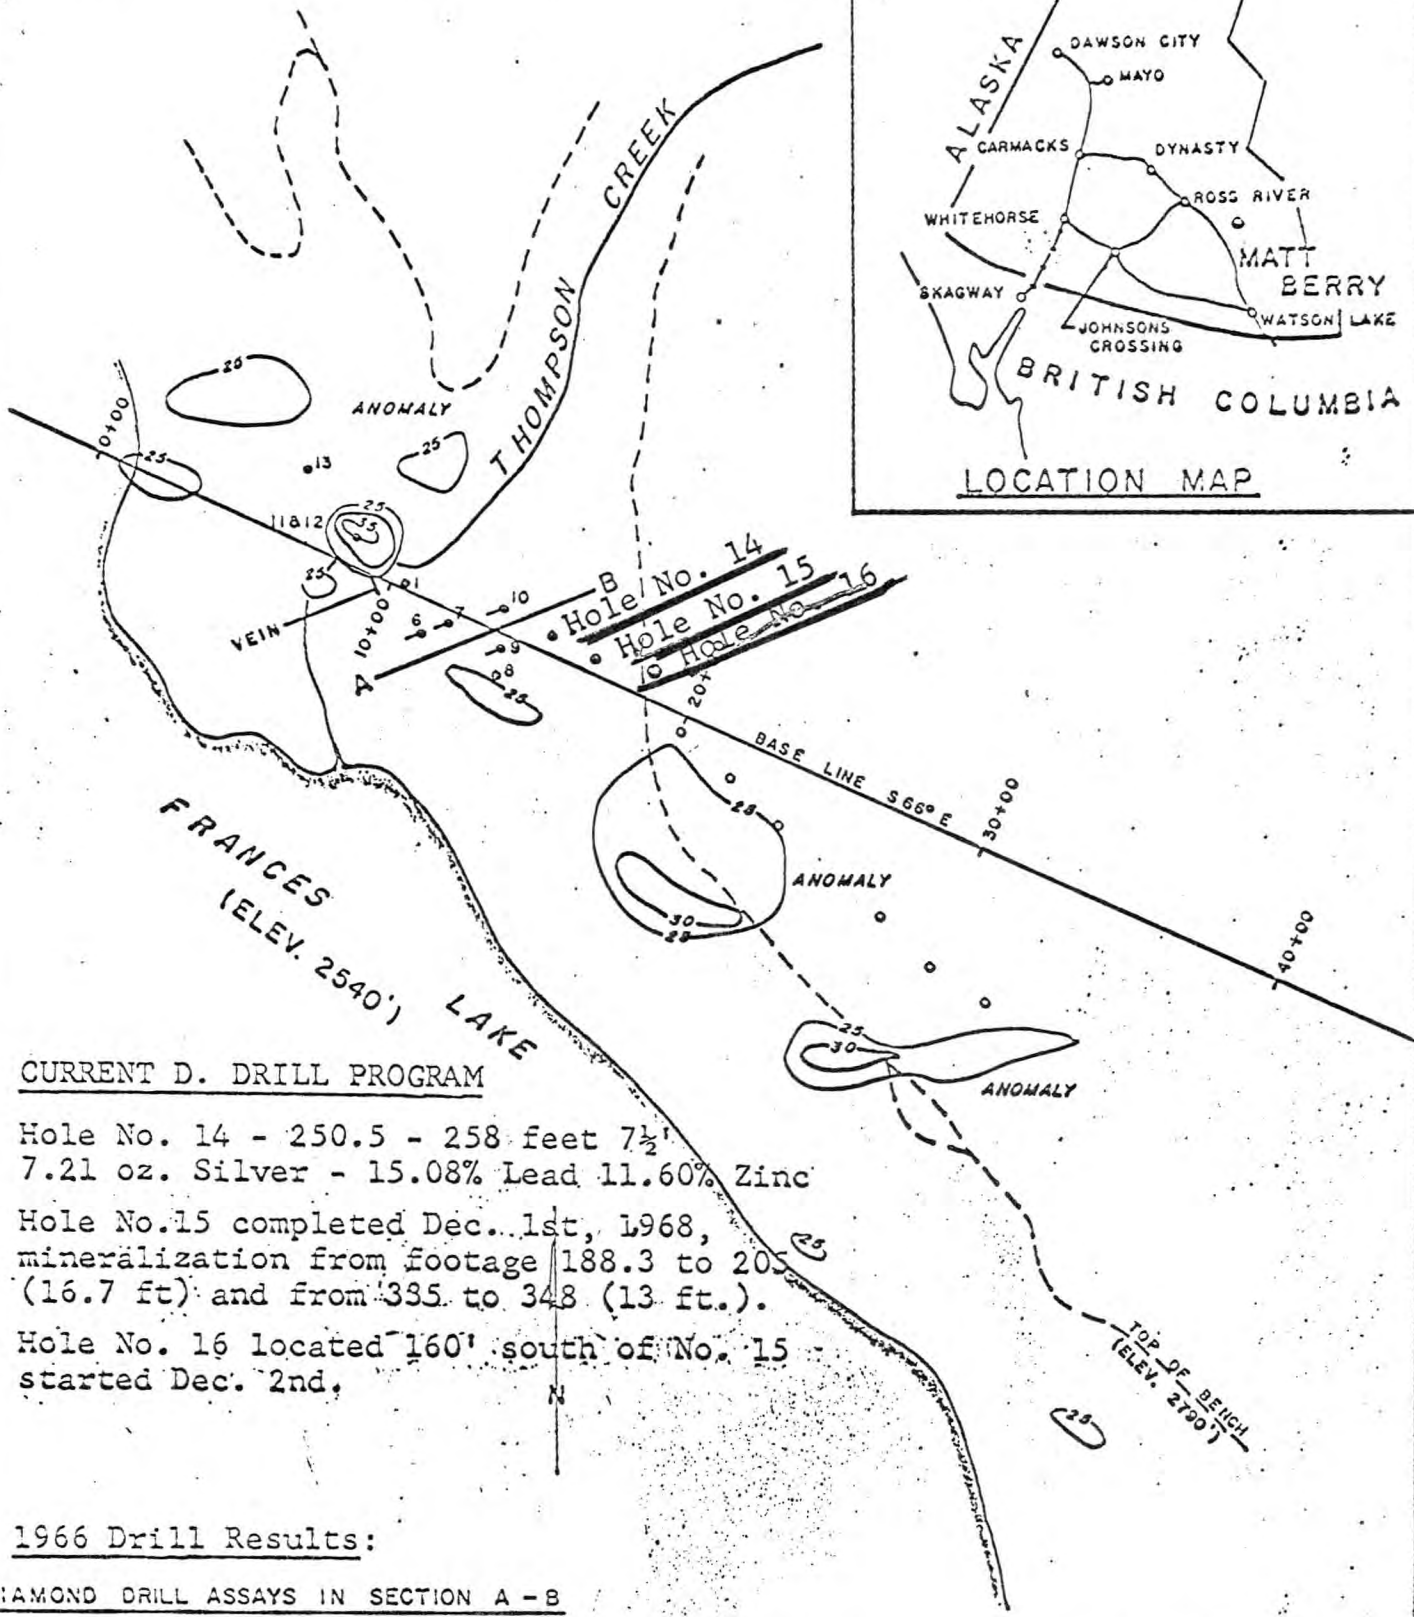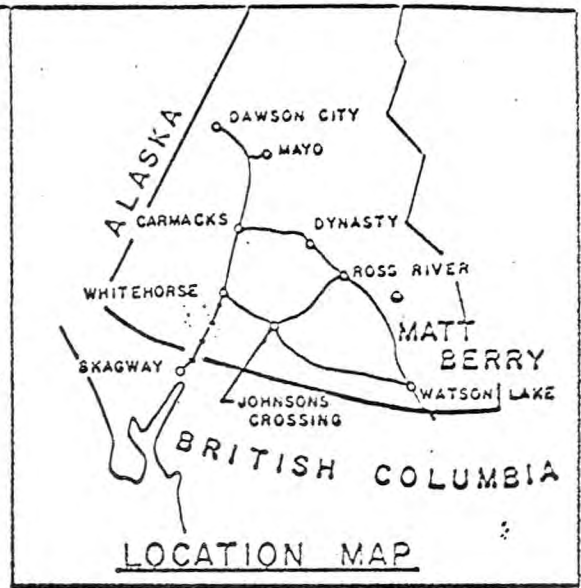

CURRENT D. DRILL PROGRAM

Hole No. 14 - 250.5 - 258 feet 7½'
 7.21 oz. Silver - 15.08% Lead 11.60% Zinc

Hole No. 15 completed Dec. 1st, 1968,
 mineralization from footage 188.3 to 205
 (16.7 ft) and from 335 to 348 (13 ft.).


Hole No. 16 located 160' south of No. 15
 started Dec. 2nd,

1966 Drill Results:

DIAMOND DRILL ASSAYS IN SECTION A - B

HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3-0'	3.9	13.5	7.1
7	86'	11-5'	4.6	7.6	13.3
9	90-5'	55'	20.6	32.8	22.3
10	173	60'	2.5	5.2	3.0
	179-5	3-0'	6.6	14.6	4.0
	202-5	2-5'	12.1	17.2	8.4

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 Location of Geophysical Anomalies
 and Diamond Drill Location
 Dec. 2nd 1968



SUITE 1102 - 347 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-0705

November 21, 1968

MATT BERRY MINES LIMITED

The first of a series of Holes (No. 14) in the current program on the Matt Berry Mines property in the Yukon has yielded the following results:

Footage 244 to 250.5 - mineralized zone below ore grade

Footage 250.5 to 258 - this section assayed:

7.21 oz.	Silver per ton
15.08%	Lead per ton
11.60%	Zinc per ton

Footage 258 to 259 - mineralized zone below ore grade

To-date, Hole No. 15 which is located 165 feet south of Hole No. 14 has advanced 52 feet and expected to intersect the extension of the Matt zone by November 26th.

MATT BERRY MINES LIMITED
SUITE 1102 - 347 BAY STREET
TORONTO 1, ONTARIO

Telephone:
366-0705

October 30, 1968

On the Company's 32 claim group on the east side of the East Arm of Frances Lake in the Yukon, drill equipment is now on the property for a start of work.

The 1966 field season drilling outlined Silver - Lead - Zinc mineralization for a distance of 750 feet along the hangwall and foot-wall contacts of a north-south shear in a phyllitic shale formation.

During August, 1968, a geophysical and geochemical survey was carried out in the area and along strike of the main Matt Zone. The Survey has outlined an anomalous area for a length of over 3,500 feet consisting of six separate anomalies, of which one overlies the previously drilled mineralization.

The immediate drill program is planned to extend the Matt Zone in the southerly direction where previously drilled mineralization assayed as follows:

Hole No. 6 depth of 34 feet - width of 3 feet assayed:
3.9 oz. Silver - 13.5% Lead - 7.1% Zinc

Hole No. 7 depth of 86 feet - width of 11½ feet assayed:
4.6 oz. Silver - 7.6% Lead - 13.3% Zinc.

Hole No. 9 depth of 90½ feet - width of 5½ feet assayed:
20.6 oz. Silver - 32.8% Lead - 22.3% Zinc.

Hole No. 10 depth of 173 feet - width of 6 feet assayed:
2.5 oz. Silver - 5.17% Lead - 3.0% Zinc.


" depth of 179½ feet - width of 3 feet assayed:
6.6 oz. Silver - 14.6% Lead - 4.0% Zinc.

" depth of 202½ feet - width of 2½ feet assayed:
12.1 oz. Silver - 17.2% Lead - 5.4% Zinc.

The first of a series of holes to be drilled in the current program will be No. 14 located on the southerly end of the Matt Zone which is expected to intersect the shear zone at about 300 feet vertically below surface.

The Treasury has received \$45,000.00 for the drill program through a current take-down of 150,000 treasury shares.

Leon La Prairie, P. Eng.
Managing Director

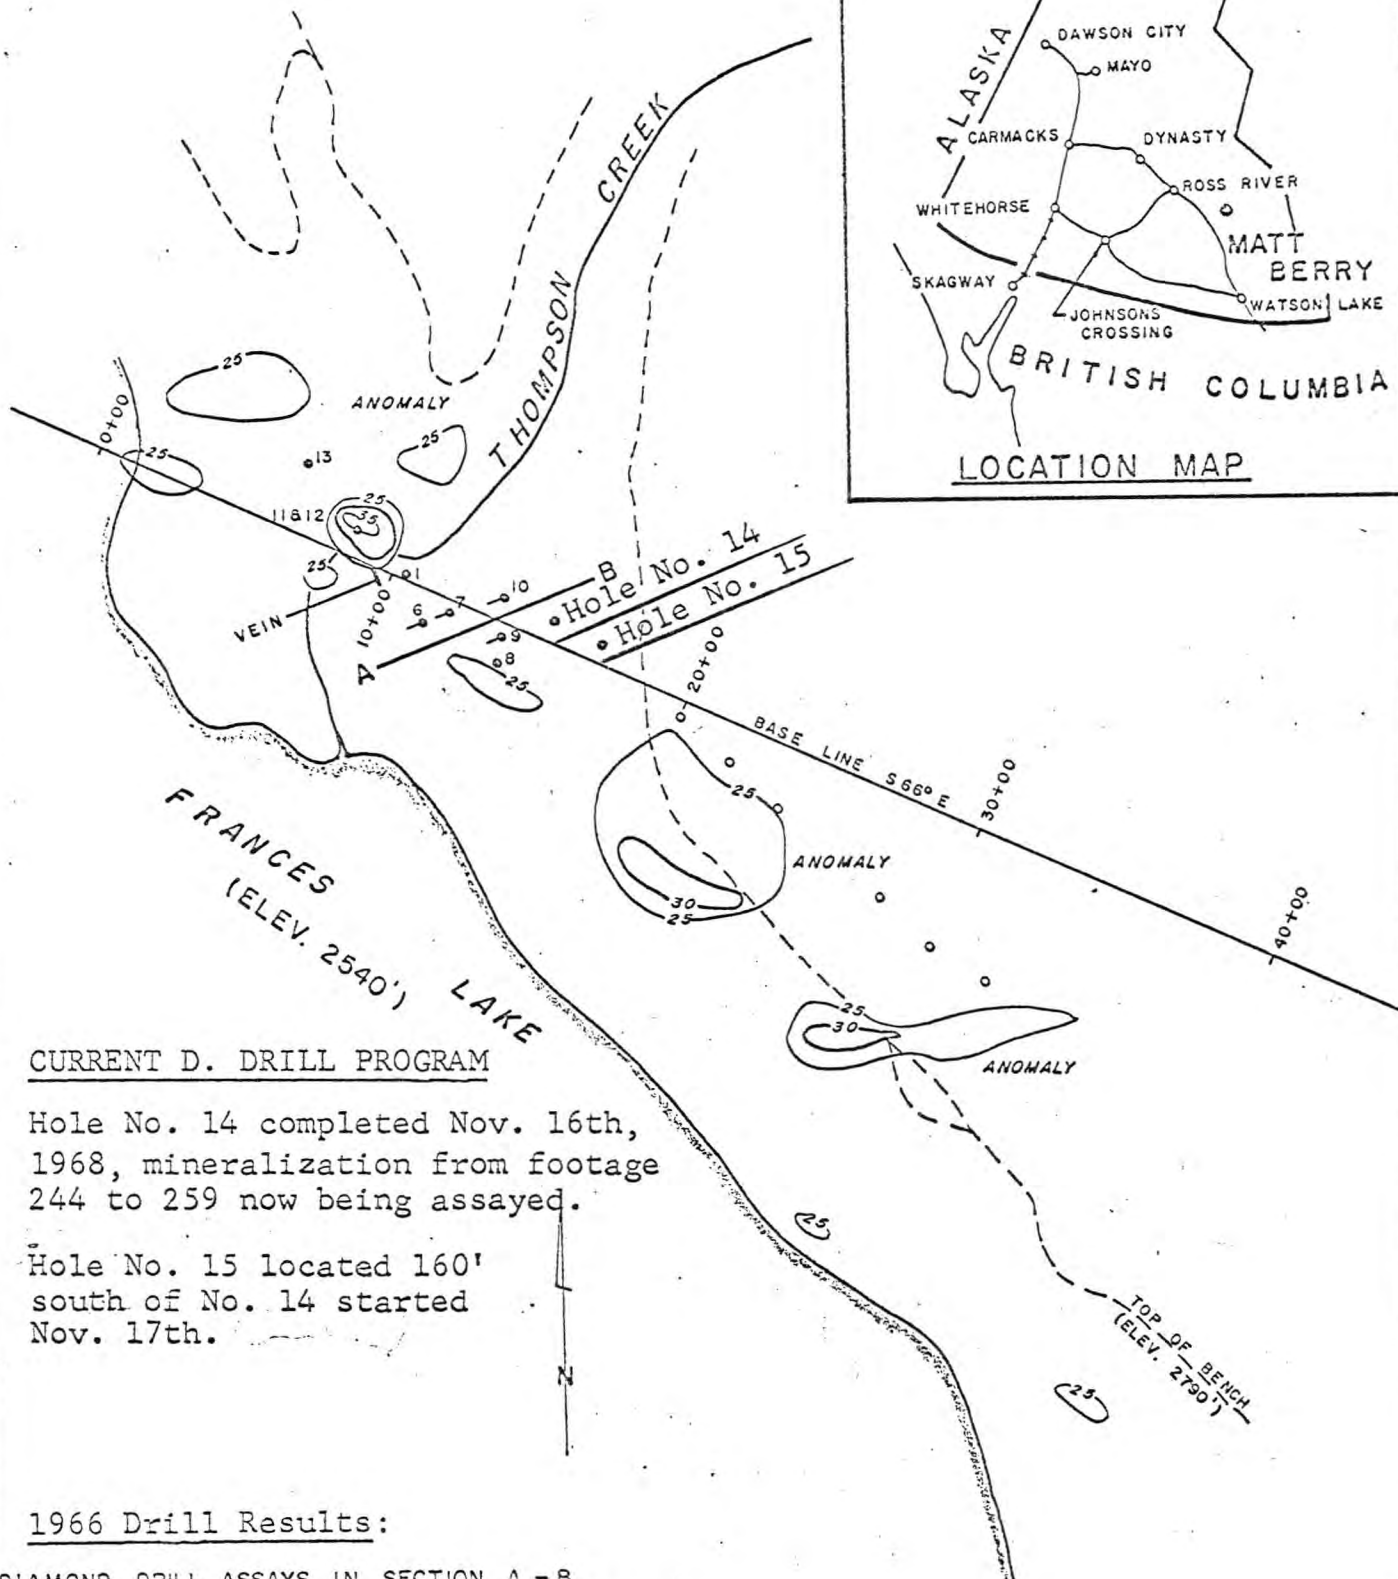

CURRENT D. DRILL PROGRAM

Hole No. 14 completed Nov. 16th, 1968, mineralization from footage 244 to 259 now being assayed.

Hole No. 15 located 160' south of No. 14 started Nov. 17th.

1966 Drill Results:

DIAMOND DRILL ASSAYS IN SECTION A - B

HOLE NO.	DEPTH	WIDTH	SILVER-oz.	LEAD-%	ZINC-%
6	34'	3-0'	3.9	13.5	7.1
7	86'	11.5'	4.6	7.6	13.3
9	90.5'	55'	20.6	32.8	22.3
10	173	60'	2.5	5.2	3.0
	179.5	3-0'	6.6	14.6	4.0
	202.5	2.5'	12.1	17.2	5.4

MATT BERRY MINES LTD.
 WATSON LAKE, AREA, Y.T.
 Location of Geophysical Anomalies
 and Diamond Drill Location
 Nov. 18, 1968

