ATLAS EXPLORATION LIMITED

AIRBORNE GEOPHYSICAL SURVEY

SHEET I

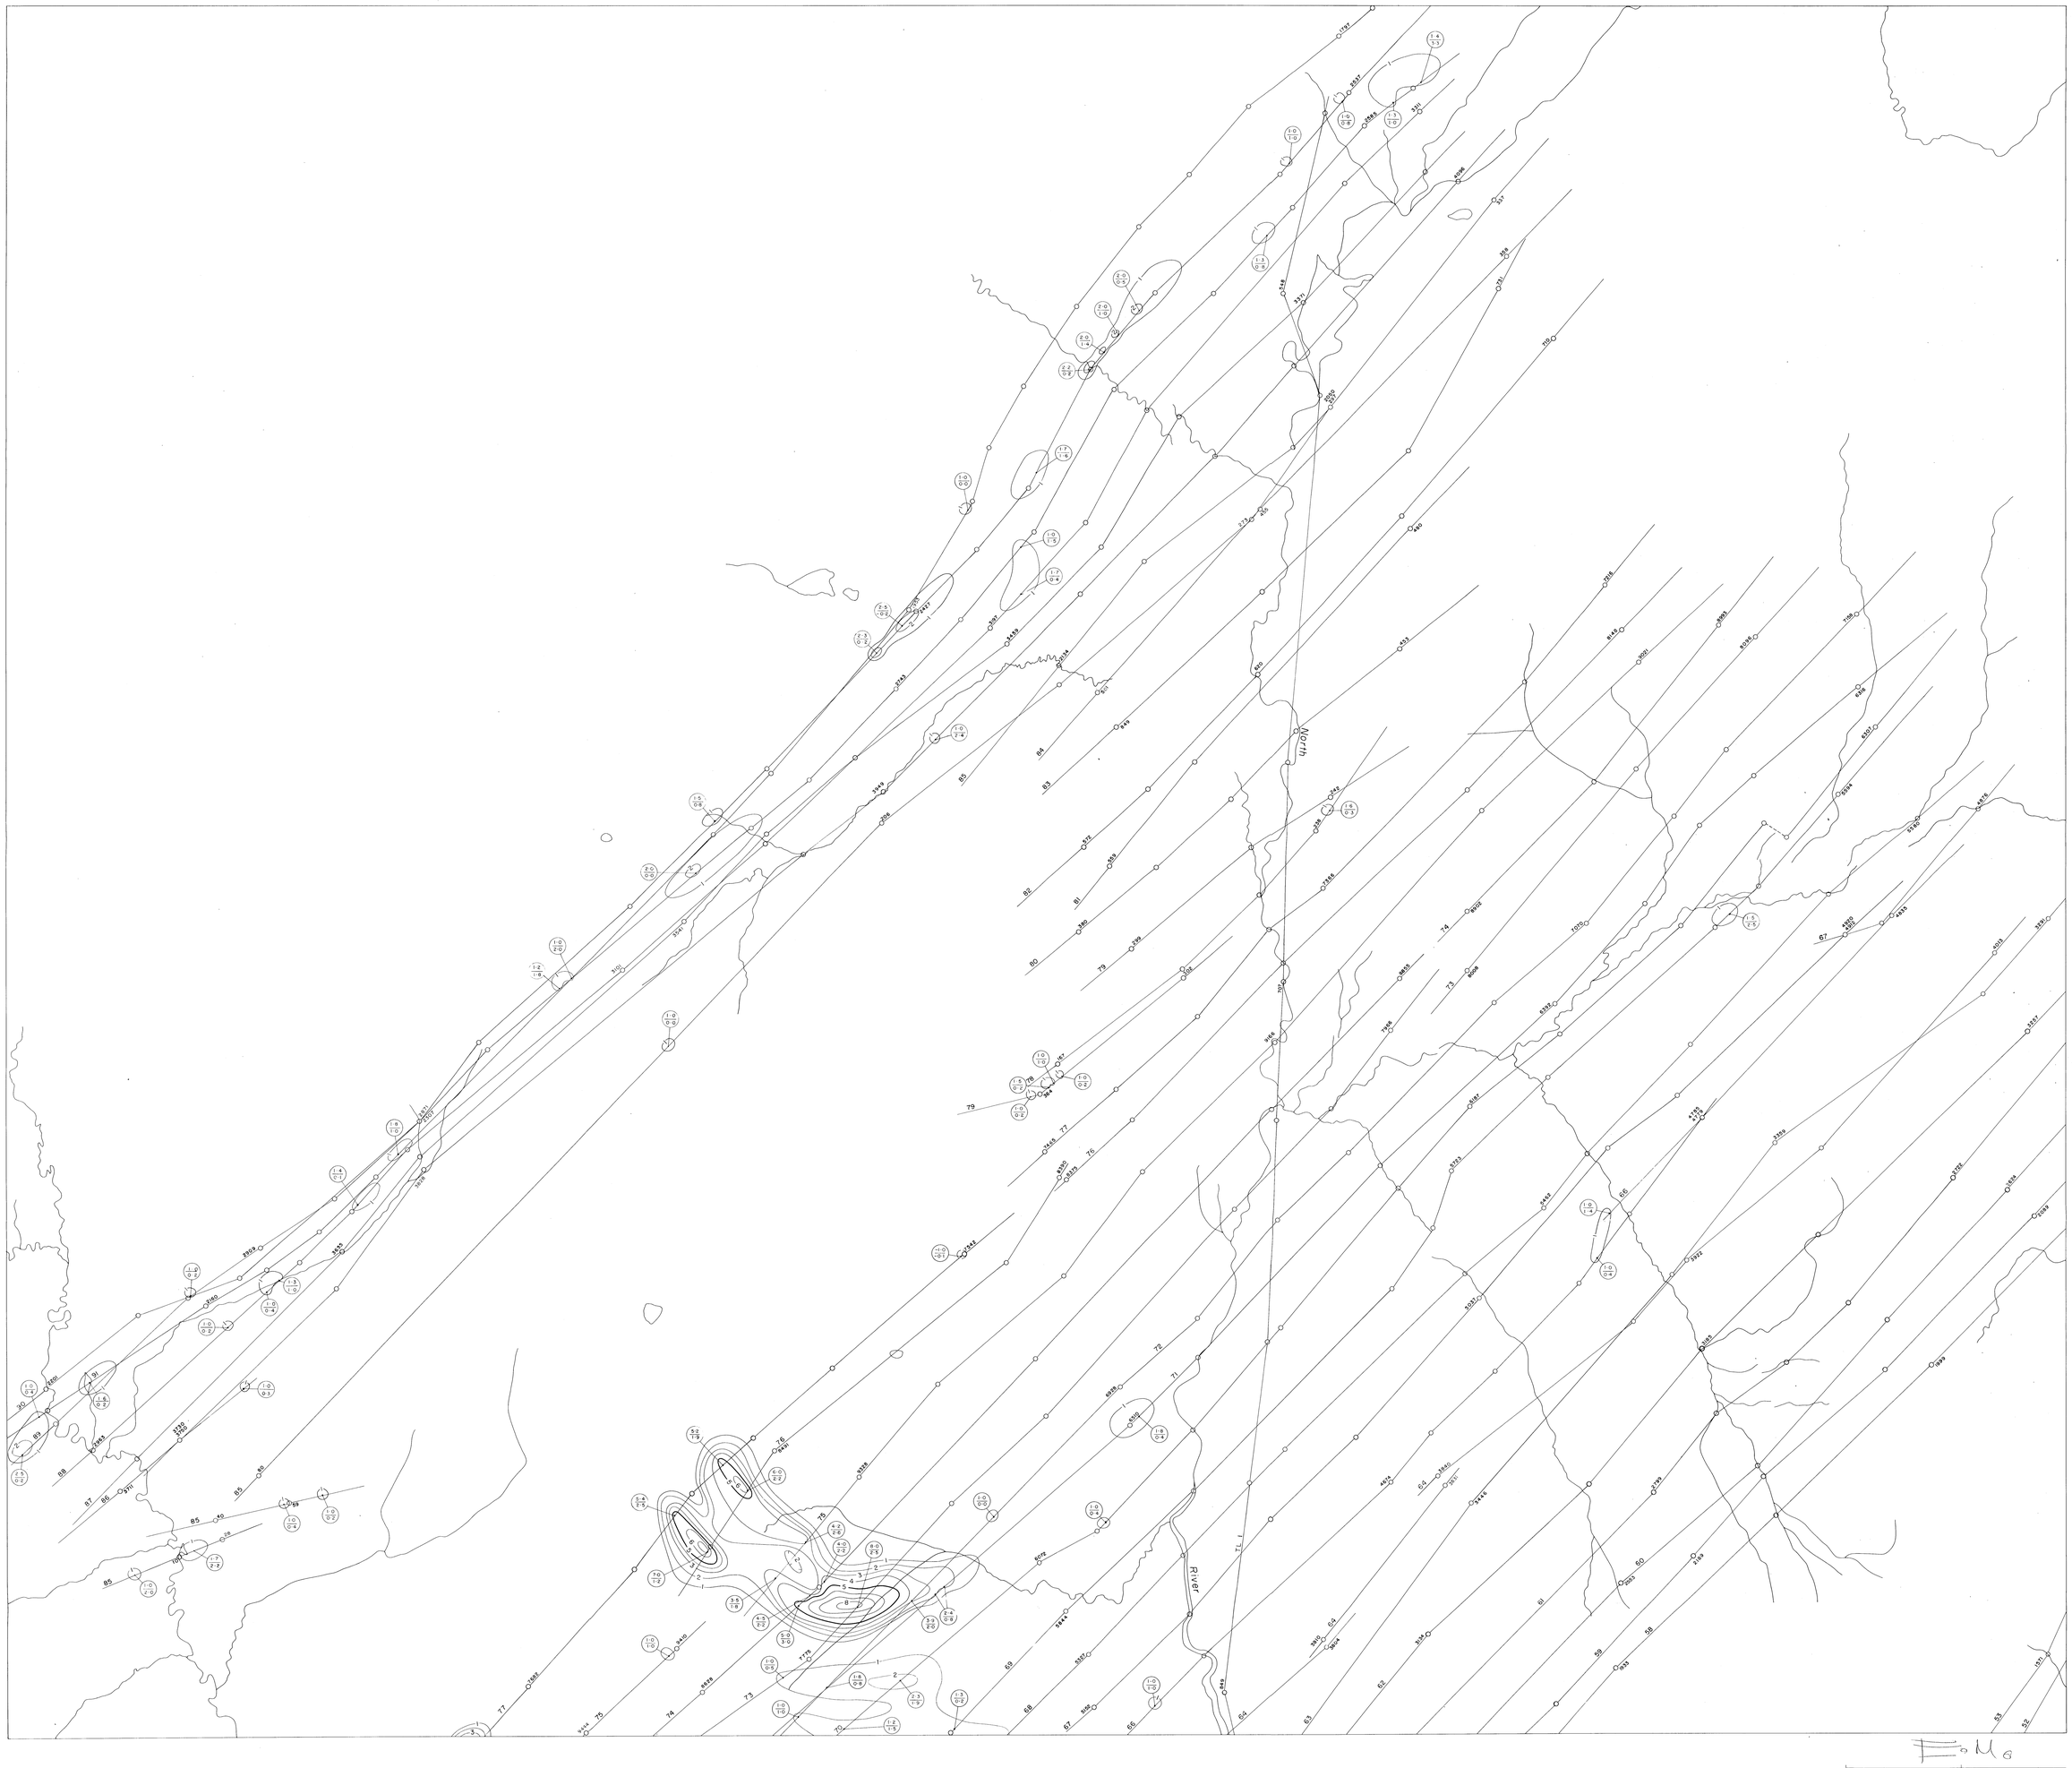

MEAN FLIGHT LINE SPACING ..... 1000 FEET

MEAN TERRAIN CLEARANCE ..... 200 FEET

ELECTROMAGNETIC CONTOURS 5,10,15 etc. .....

1,2,3,4 etc. .....

NEGATIVE CONTOURS -5,-10 etc. .....

-1,-2,-3,-4 etc. .....

FIDUCIAL POINTS 0.2690

FLIGHT LINES .....

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary. The figures (2-3 / 2-2) represent amplitude in phase component / quadrature component. The frequency of the primary current is 4000 cycles per second.

FYRE LAKE AREA

YUKON TERRITORY

SCALE

1000 FEET 0 1000 2000 3000 4000 5000 FEET

1 Inch to 1320 Feet

ELECTROMAGNETIC MAP

inches 0 1 2

centimetres 0 1 2 3 4 5

YUKON GEOLOGICAL SURVEY

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

Flown and compiled by

LOCKWOOD SURVEY CORPORATION LIMITED

TORONTO, CANADA

1966



015877