ATLAS EXPLORATION LIMITED

AIRBORNE GEOPHYSICAL SURVEY

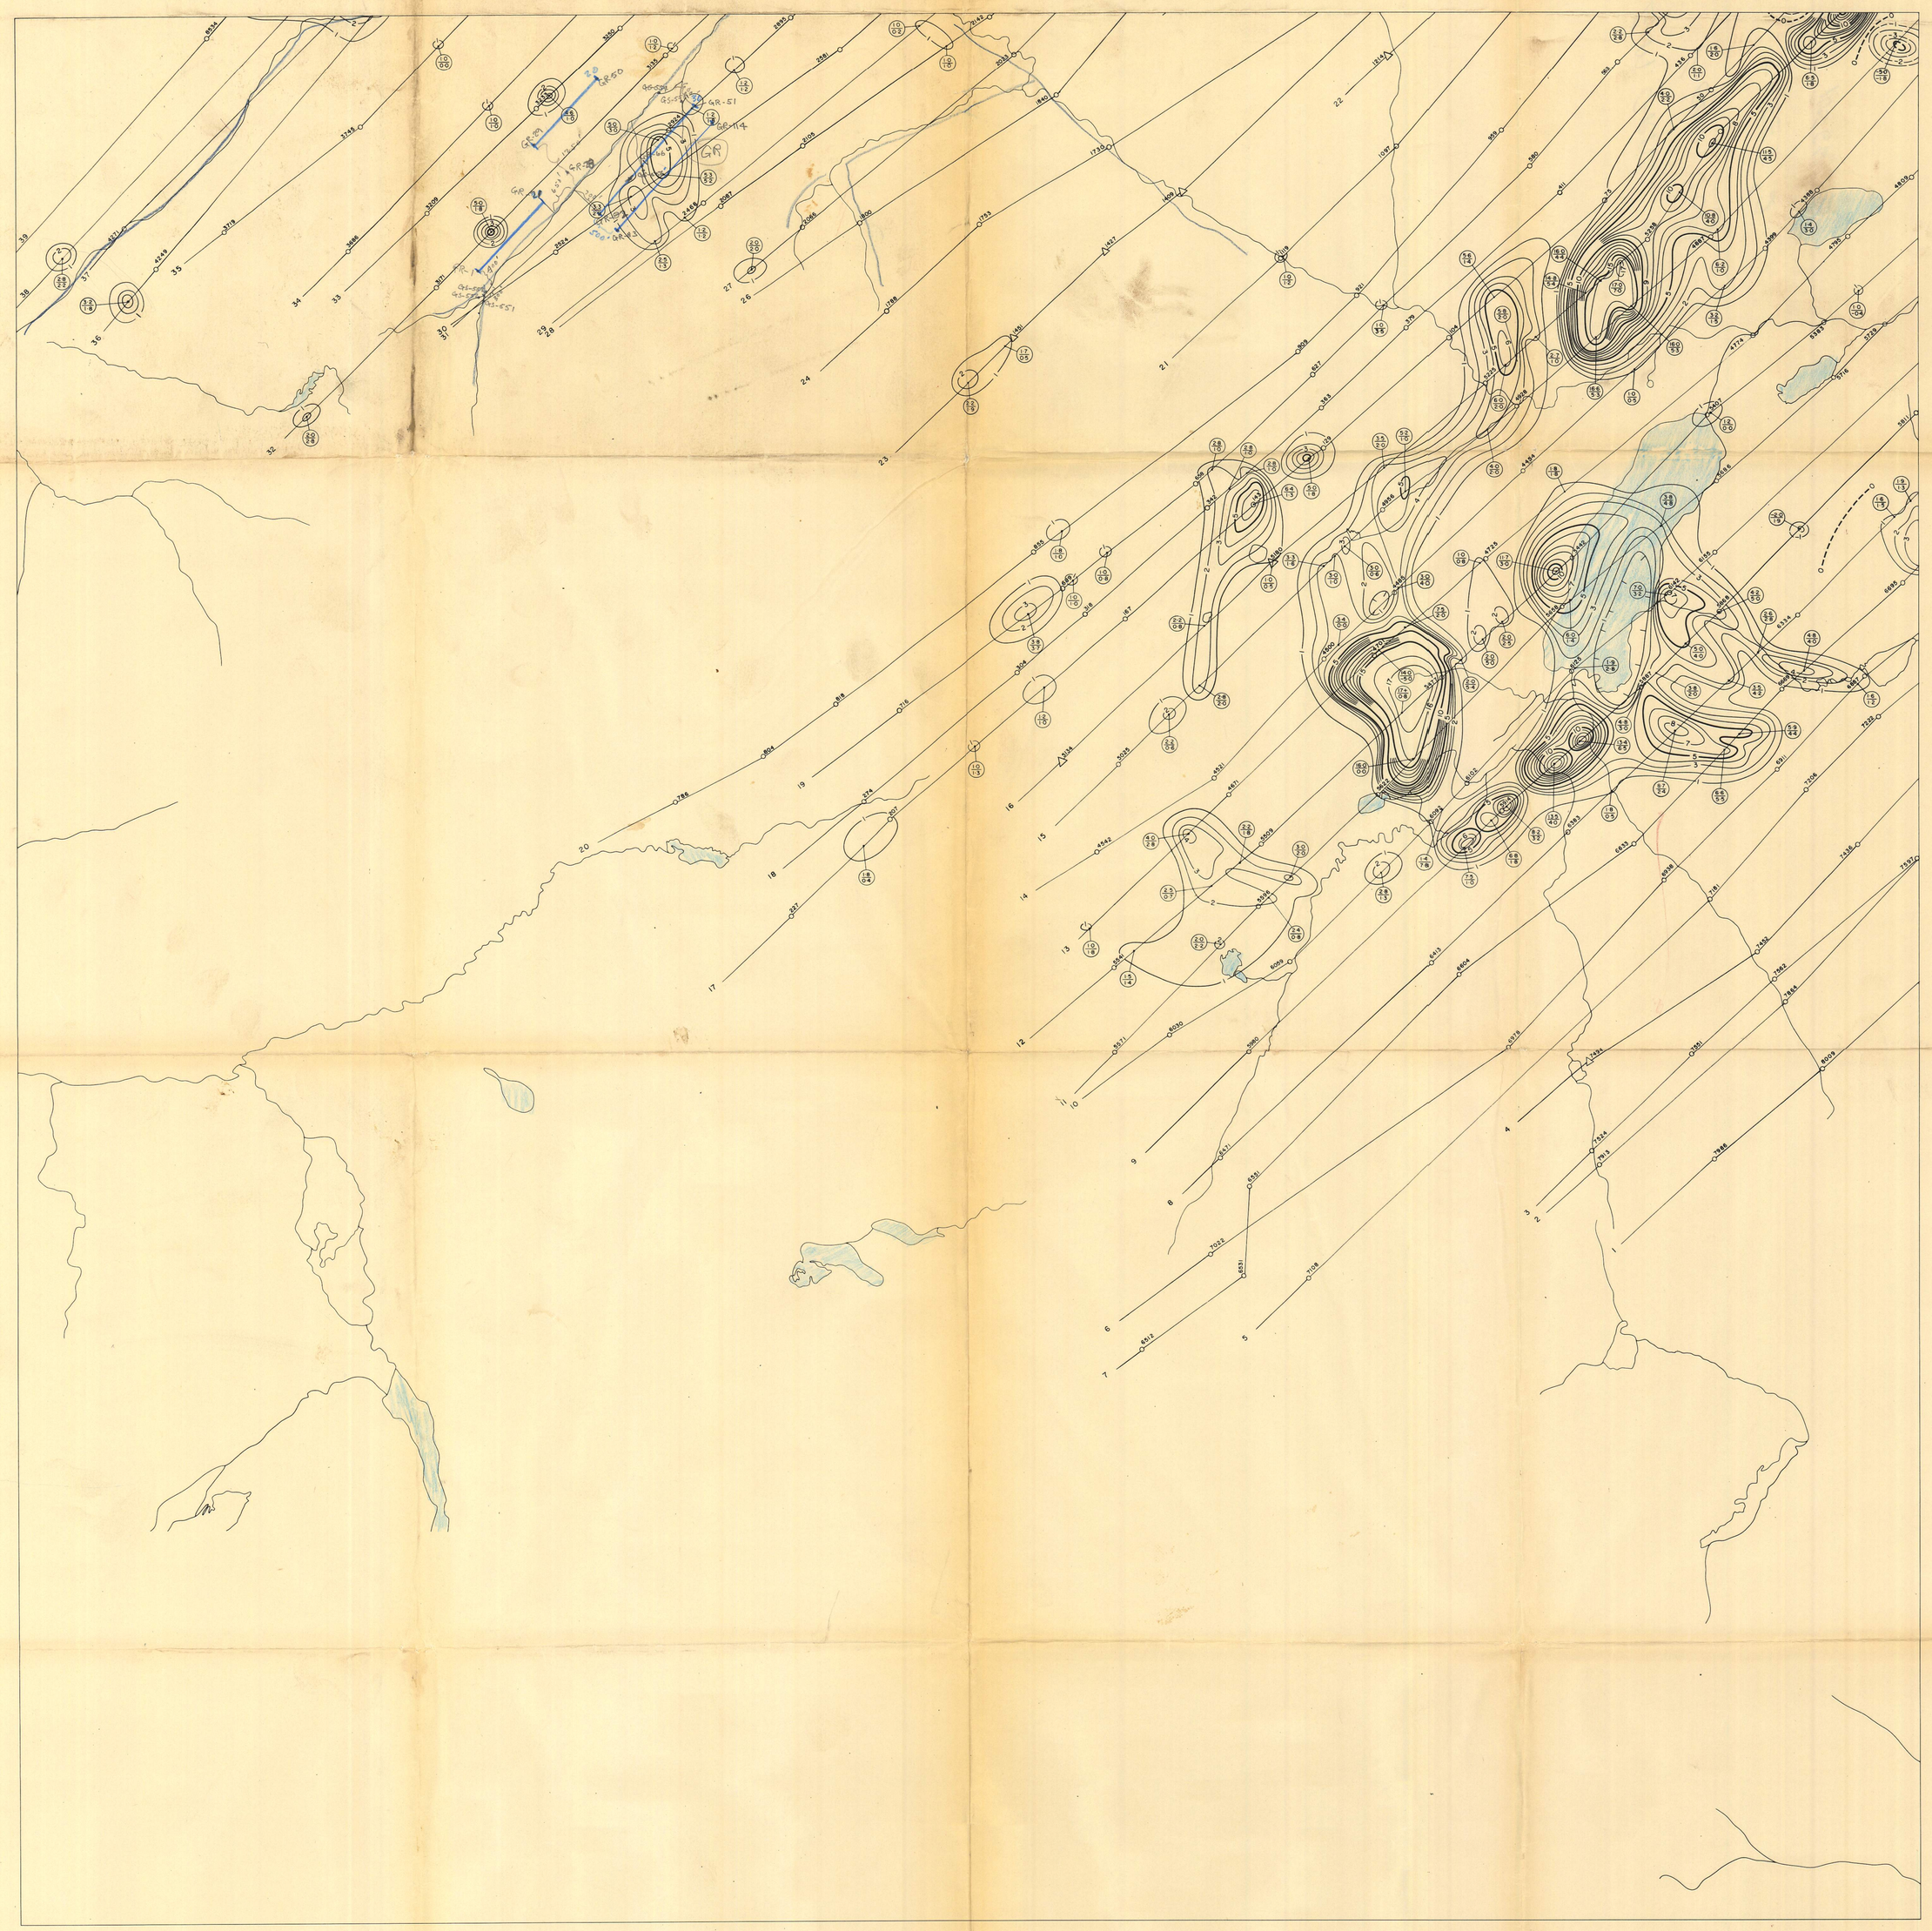

MEAN FLIGHT LINE SPACING _____ 1000 FEET
MEAN TERRAIN CLEARANCE _____ 200 FEET
ELECTROMAGNETIC CONTOURS 5, 10, 15 etc. _____
1, 2, 3, 4 etc. _____
FIDUCIAL POINTS _____ ○ 3690
FLIGHT LINES _____

The contours represent amplitude of in phase response of the resultant field expressed in parts per million of the primary. The figures (2.3 / 0.2) represent amplitude in phase component / quadrature component. The frequency of the primary current is 4000 cycles per second

GRASS LAKE AREA

YUKON TERRITORY

SCALE

1000 FEET — 0 — 1000 — 2000 — 3000 — 4000 — 5000 FEET

1 inch to 1320 Feet

ELECTROMAGNETIC MAP

Flown and compiled by
LOCKWOOD SURVEY CORPORATION LIMITED
TORONTO, CANADA
1966

inches
0 1 2
0 1 2 3 4 5
centimetres

This reference scale bar has been added to the original image. It will scale at the same rate as the image, therefore it can be used as a reference for the original size.

YUKON GEOLOGICAL SURVEY

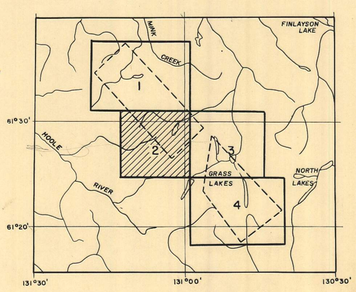

013962