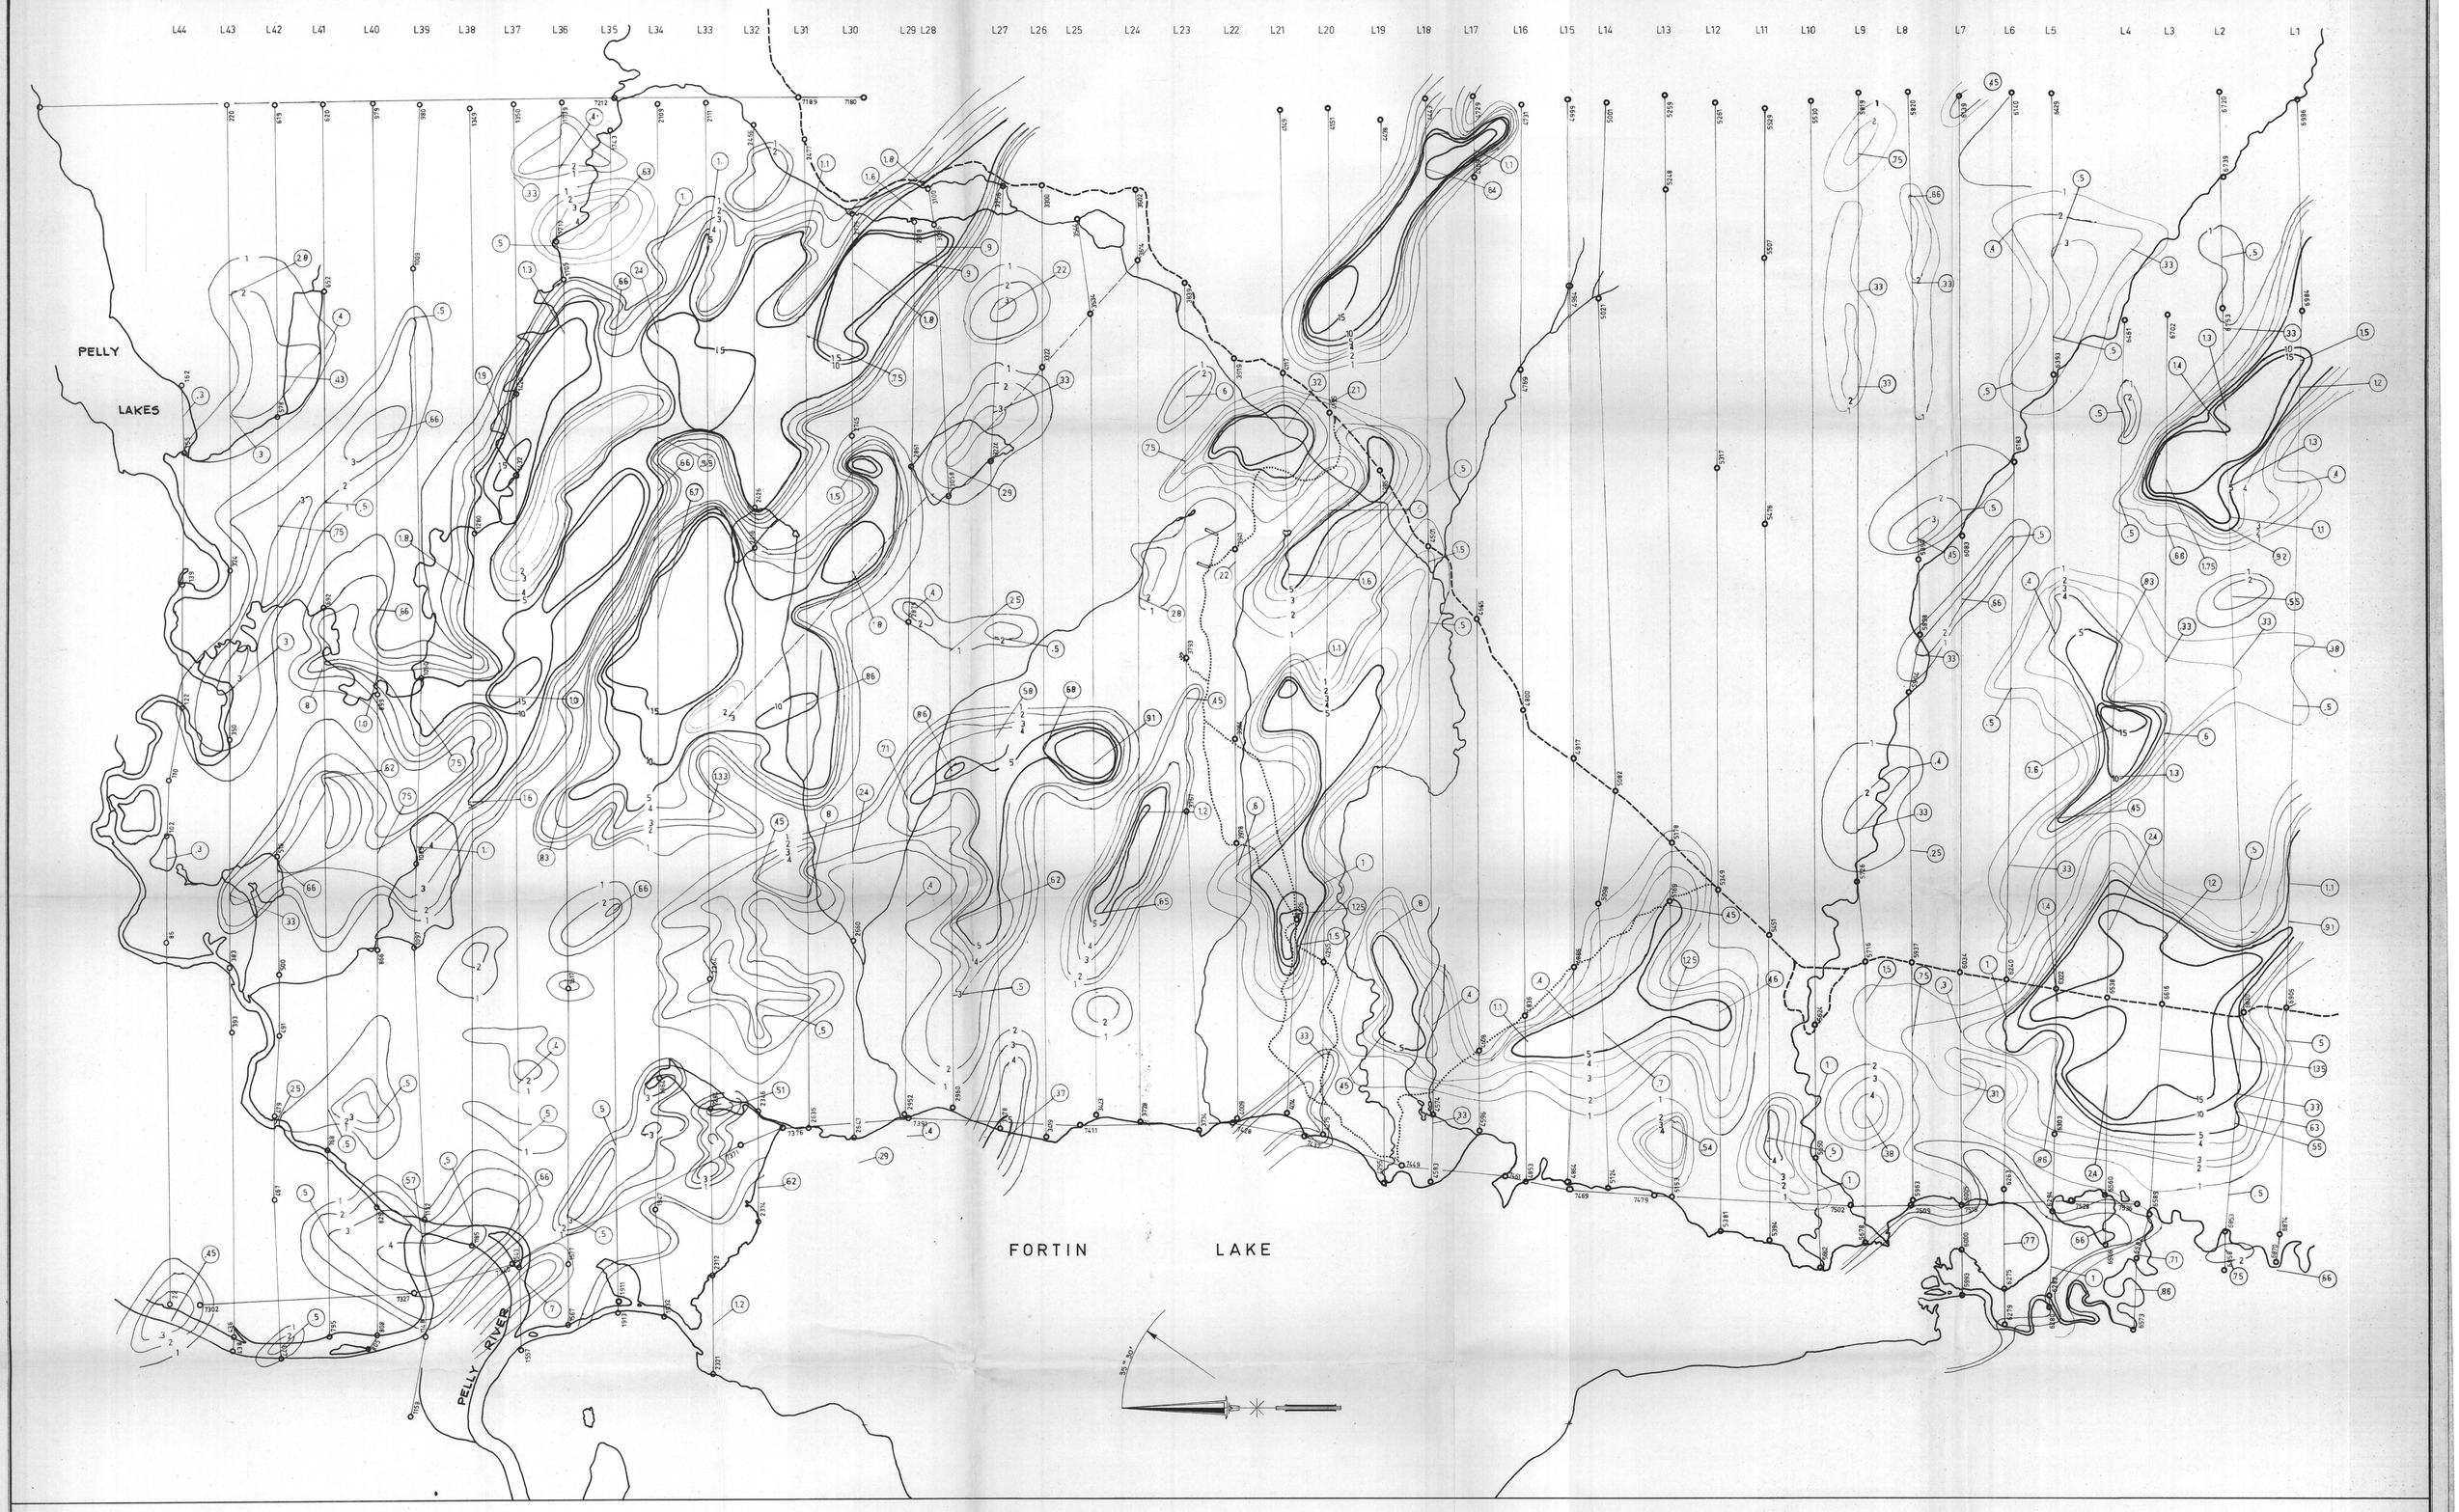

MEAN FLIGHT LINE SPACING ..... 1000 FEET
MEAN TERRAIN CLEARANCE ..... 200 FEET
ELECTROMAGNETIC CONTOURS 5, 10, 15, etc. .....
1, 2, 3, 4, etc. .....
NEGATIVE CONTOURS -5, -10, etc. .....
-1 -2 -3 -4 etc. .....

FIDUCIAL POINTS ..... ○3690
FLIGHT LINES .....

The contours represent amplitude of in phase response of the resultant expressed in parts per million of the primary.

The figures (-5) represent amplitude $\frac{\text{in phase component}}{\text{quadrature component}}$

The frequency of the primary current is 4000 cycles per second.

ATLAS EXPLORATIONS LIMITED

YUKON TERRITORY

SHELDON REGION

PAY MINERAL CLAIMS AREA

105-G-16

AIRBORNE ELECTRO MAGNETIC SURVEY

FLOWN BY : LOCKWOOD SURVEY CORPORATION LIMITED

COMPILED BY: R.DARNEY
DRAWN BY: R.D. & D.W.G
DATE FLOWN: SEPT. 13-1968
DATE DRAWN: JAN. 16- 1969

1320 0 1320 2640 3960
SCALE IN FEET

014147

inches
0 1 2
0 1 2 3 4 5
centimetres

YUKON GEOLOGICAL SURVEY

This reference scale bar has been added to the original image. It will scale at the same rate as the image, so it can be used as a reference for the original size.