

2

GRUM PROJECT.

SURFACE

ASSAYS & INTERSECTIONS

A 83 - A164

014943

ASSAY N°	SECTION (FEET)		CORE LENGTH (FT)	ASSAYS		
	FROM	TO		Ag ozs	Pb %	Zn %
	0.0	454.0	454.0	0.00	0.00	0.00
1810	454.0	462.0	8.0	2.12	5.20	3.66
	462.0	463.5	1.5	NOT ASSAYED		
1811	463.5	473.5	10.0	1.29	3.53	3.12
1812 <u>4735</u>	473.5	476.0	2.5	0.59	1.65	1.98
	476.0	631.5	155.5	NOT ASSAYED		
1813	631.5	632.5	1.0	0.83	1.65	3.18
1814	632.5	632.9	0.4	1.62	3.08	4.14
1815	632.9	634.9	2.0	0.88	2.30	3.06
1816	634.9	636.5	1.6	0.80	1.95	2.58
1817	636.5	641.5	5.0	0.29	0.43	0.44
1818	641.5	647.6	6.1	0.21	0.34	0.20
1819	647.6	648.5	0.9	0.50	1.33	1.22
	648.5	729.0	80.5	NOT ASSAYED		
1820	729.0	734.0	5.0	0.59	1.03	0.95
	734.0	782.0	48.0	NOT ASSAYED		
1821	782.0	792.0	10.0	0.15	0.10	0.46
	792.0	835.0	43.0	NOT ASSAYED		
1822	835.0	843.0	8.0	0.12	0.10	0.07
	843.0	847.8	4.8	NOT ASSAYED		
1823	847.8	850.0	2.2	0.47	1.08	1.26
1824	850.0	855.0	5.0	0.77	1.60	1.92
1825	855.0	860.5	5.5	0.59	1.38	1.60
1826	860.5	863.7	3.2	0.62	1.20	1.62
	863.7	896.0	32.3	NOT ASSAYED		
1827	896.0	899.0	3.0	0.47	1.18	1.08
	899.0	1184.0	285.0	0.00	0.00	0.00

END OF HOLE

LOCATION. 12 W. 2 S.

DIP AT COLLAR. 90°

ELEVATION } 4229.43 ft  
 { 1289.13 M

BEARING.

DEPTH. 1184 ft. (360.88 M.)

138.4 144.3 5.9  
 454.0 - 473.5 = 19.5 ft. Ag . 1.53 ozs.  
 Pb . 3.94%  
 Zn . 3.10%

192.5 193.5 1.0  
 631.5 - 634.9 = 3.4 ft Ag . 0.95 ozs  
 Pb . 2.20%  
 Zn . 3.22%

LOW VALUES.

1m = 39.36

3m = 3.3'



6

DDH A 85

ASSAY No	SECTION (FEET)		CORE LENGTH (FT)	ASSAYS		
	FROM	TO		Ag <sub>2</sub> O%	Pb%	Zn%
	0.0	595.0	595.0	0.00	0.00	0.00
1941	595.0	603.5	8.5	1.18	2.18	4.44
1942	603.5	612.7	9.2	0.88	1.65	3.30
1943	612.7	622.5	9.8	0.41	0.83	2.40
1944	622.5	632.5	10.0	0.56	1.23	2.10
1945	632.5	642.5	10.0	0.29	1.18	0.96
1946	642.5	652.5	10.0	0.18	0.25	0.62
1947	652.5	662.5	10.0	0.26	0.40	1.08
1948	662.5	672.5	10.0	0.38	0.83	0.94
1949	672.5	682.5	10.0	0.15	0.43	0.68
1950	682.5	692.5	10.0	0.18	0.44	1.14
1951	692.5	702.5	10.0	0.15	0.44	1.10
1952	702.5	712.5	10.0	0.35	0.80	1.16
1953	712.5	718.0	5.5	1.00	2.48	5.82
	718.0	721.5	3.5	NOT ASSAYED		
1954	721.5	728.0	6.5	0.03	0.19	0.33
1955	728.0	736.0	8.0	0.06	0.22	0.48
1956	736.0	744.5	8.5	0.59	1.37	2.65
1957	744.5	748.5	4.0	1.12	2.40	1.56
1958	748.5	756.0	7.5	1.32	3.38	2.82
1959	756.0	766.0	10.0	0.74	1.98	0.92
1960	766.0	776.0	10.0	0.56	1.38	3.40
1961	776.0	786.0	10.0	0.44	1.02	1.80
1962	786.0	796.0	10.0	1.06	3.00	3.96
1963	796.0	806.0	10.0	0.88	2.03	2.22
1964	806.0	810.0	10.0	0.18	0.74	1.50
	810.0	846.5	36.5	NOT ASSAYED		
1965	846.5	856.5	10.0	0.29	0.60	1.10
1966	856.5	862.0	5.5	0.21	0.38	0.61
1967	862.0	868.2	6.2	1.38	3.83	3.96
1968	868.2	873.3	5.1	0.88	2.38	3.72
1969	873.3	881.1	7.8	1.91	4.73	5.40
1970	881.1	887.8	6.7	0.50	0.98	1.68
1971	887.8	897.5	9.7	0.18	0.34	1.28
1972	897.5	911.0	13.5	0.68	1.20	1.42
	911.0	924.0	13.0	NOT ASSAYED		
1975	924.0	934.0	10.0	0.62	1.38	1.40
	934.0	947.7	13.7	NOT ASSAYED		

LOCATION 82 W. 4 N.

DIP AT COLLAR 90°

ELEVATION { 4324.85 ft  
1318.21 M

BEARING

DEPTH 1414 ft. (430.99 M.)

595.0 - 603.5 = 8.5 ft. Ag 1.18% Pb 2.18%  
Zn 4.44%

712.5 - 718.0 = 5.5 ft. Ag 1.00% Pb 2.48%  
Zn 5.82%

786.0 - 796.0 = 10.0 ft. Ag 1.06% Pb 3.00%  
Zn 3.96%

862.0 - 881.1 = 19.1 ft. Ag 1.46%  
Pb 3.81%  
Zn 4.48%

ASSAY N <sup>o</sup>	SECTION (FEET)		CORE LENGTH (FT)	ASSAYS					
	FROM	TO		Ag <i>ags</i>	Pb %	Zn %			
1978	947.7	956.2	8.5	0.65	1.14	1.48			
1979	956.2	960.8	4.6	0.15	0.12	0.32			
1980	960.8	971.0	10.2	1.32	4.13	3.96			
1981	971.0	982.0	11.0	0.47	1.22	1.54			
1982	982.0	993.5	11.5	1.06	2.78	2.82			
1983	993.5	998.1	4.6	0.18	0.07	0.18			
1984	998.1	1004.8	6.7	3.38	6.63	12.77			
	1004.8	1109.2	<del>104.4</del>	NOT ASSAYED					
1985	1109.2	1118.3	9.1	1.91	4.43	6.75			116.8 ft
1986	1118.3	1128.0	9.7	1.91	5.25	6.96			Ag 1.97 <i>ags</i>
1987	1128.0	1136.0	8.0	2.35	5.23	11.53			Pb 4.92 %
1988	1136.0	1140.0	4.0	1.88	4.85	7.48			Zn 7.95 %
1989	1140.0	1152.0	10.0	2.35	5.98	9.03			
1990	1152.0	1156.0	4.0	1.62	4.54	7.68			
1991	1156.0	1160.0	4.0	0.77	1.87	1.56			
1992	1160.0	1165.5	5.5	1.03	2.78	3.72			
1993	1165.5	1171.2	6.7	1.12	2.45	3.00			
1994	1171.2	1174.0	2.8	2.65	6.35	9.97			15.3 ft Ag 3.70 <i>ags</i>
1995	1174.0	1183.0	9.0	4.16	9.10	17.13			Pb 7.40 %
1996	1183.0	1186.5	3.5	1.79	3.87	4.62			Zn 12.95 %
	1186.5	1202.5	16.0	NOT ASSAYED					
1997	1202.5	1209.0	6.5	0.21	0.43	0.26			
1998	1209.0	1211.0	2.0	0.41	0.65	1.13			
	1211.0	1282.1	71.1	NOT ASSAYED					
1999	1282.1	1284.6	2.5	0.26	0.63	1.06			
2000	1284.6	1287.5	2.9	1.48	5.12	3.96			
2301	1287.5	1290.9	3.4	0.41	0.95	0.92			
2302	1290.9	1296.5	5.6	1.50	4.65	3.66			
	1296.5	1414.0	117.5	0.00	0.00	0.00			

END OF HOLE

ASSAYS

Pb%	Zn%
1.14	1.48
0.12	0.32
4.13	3.96
1.22	1.54
2.78	2.82
0.07	0.18
6.63	12.77

$960.8 - 1004.8 = 44.0 \text{ ft}$

Ag	1.23 o/s
Pb	3.00 %
Zn	3.08 %

LOW

ASSAYED

4.43	6.75	146.8 ft
5.25	6.96	Ag 1.97 o/s
5.23	11.53	Pb 4.92 %
4.85	7.48	Zn 7.95 %
5.98	9.03	
4.54	7.68	
1.87	1.56	
2.78	3.72	
2.45	3.00	
6.35	9.97	15.3 ft Ag 3.70 o/s
9.10	17.13	Pb 7.40 %
3.87	4.62	Zn 12.95 %

$1109.2 - 1186.5 = 77.3 \text{ ft}$

Ag	2.06 o/s
Pb	4.95 %
Zn	7.98 %

ASSAYED

0.43	0.26
0.65	1.13

ASSAYED

0.63	1.06
5.12	3.96
0.95	0.92
4.65	3.66
0.00	0.00

$1284.6 - 1287.5 = 2.9 \text{ ft}$  Ag 1.48 o/s Pb 5.12 % Zn 3.96 %

$1284.6 - 1296.5 = 11.9 \text{ ft}$  Ag 1.18 o/s Pb 3.70 % Zn 2.95 %

$1290.9 - 1296.5 = 5.6 \text{ ft}$  Ag 1.50 o/s Pb 4.65 % Zn 3.66 %

LOW

ASSAY NO	SECTION (FEET)		LENGTH FEET.	ASSAYS.			
	FROM	TO		Ag ogs	Pb %	Zn %	Au ogs
	0.0	1235.5	1235.5	0.00	0.00	0.00	
2101	1235.5	1246.0	10.5	0.12	0.43	0.33	
2102	1246.0	1249.5	3.5	0.88	2.25	3.48	
2103	1249.5	1256.8	7.3	0.91	2.08	4.14	
2104	1256.8	1261.8	5.0	0.68	1.58	2.70	
2107	1261.8	1266.4	4.6	0.74	1.78	3.18	
2105	1266.4	1270.0	3.6	0.71	1.65	2.94	
2106	1270.0	1276.1	6.1	0.62	1.60	4.62	
2109	1276.1	1285.7	9.7	<i>Assayed for Gold only</i>			0.005
2110	1285.7	1290.5	3.0				0.005
	1290.5	1292.5	2.0	NOT ASSAYED			
2111	1292.5	1306.0	13.5				0.005
	1306.0	1669.3	363.0	NOT ASSAYED			
2108	1669.3	1672.3	3.0	1.00	3.75	4.68	
	1672.3	2022.0	349.7	0.00	0.00	0.00	

END OF HOLE

LOCATION 108 W 12 N  
 ELEVATION 4269.56 ft  
 1301.36 M

DIP AT COLLAR 90°  
 BEARING  
 DEPTH 2022 ft (616.31 m.)

1246.0 - 1276.1 = 30.1 ft  
 Ag 0.75 ogs  
 Pb 1.82 %  
 Zn 3.63 %  
 how.

R

ASSAY No	SECTION (FEET)		LENGTH FEET.	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
	0.0	535.0	535.0	0.00	0.00	0.00
1736	535.0	536.8	1.8	0.26	0.45	0.76
1737	536.8	541.5	4.7	2.38	5.87	9.24
1738	541.5	543.6	2.1	2.06	4.85	5.60
1739	543.6	546.0	2.4	1.82	2.93	3.12
1740	546.0	554.2	8.0	0.44	0.89	1.02
1741	554.2	557.5	3.3	0.80	2.05	3.60
1742	557.5	561.0	3.5	1.18	3.15	2.58
1743	561.0	570.0	9.0	0.59	1.15	3.96
1744	570.0	578.6	8.6	0.21	0.43	0.78
1745	578.6	584.5	5.9	0.06	0.10	0.15
1746	584.5	586.3	1.8	0.44	0.62	0.58
1747	586.3	589.4	3.1	1.62	3.45	5.64
	589.4	601.8	12.4	NOT ASSAYED		
1748	601.8	611.7	9.9	0.53	1.10	2.28
	611.7	621.7	10.0	NOT ASSAYED		
1749	621.7	631.0	9.3	0.83	2.03	3.30
1750	631.0	638.8	7.8	0.44	0.95	1.20
1751	638.8	643.8	5.0	0.59	1.40	1.04
1752	643.8	649.0	5.2	0.26	0.62	0.44
1753	649.0	653.6	4.6	0.35	0.93	0.84
1754	653.6	663.4	9.8	1.21	3.00	4.26
1755	663.4	666.0	2.6	0.77	2.00	2.22
1756	666.0	676.0	10.0	1.27	3.08	3.90
1757	676.0	686.0	10.0	0.56	1.30	2.46
1758	686.0	693.0	7.0	0.59	1.13	2.34
1759	693.0	697.1	4.1	0.65	1.48	3.12
1760	697.1	706.5	9.4	0.56	1.25	2.85
1761	706.5	714.5	8.0	0.62	1.23	2.46
1762	714.5	721.4	6.9	0.62	1.28	2.88
1763	721.4	731.0	9.6	2.21	3.90	3.48
1764	731.0	740.5	9.5	1.24	2.38	6.66
1765	740.5	747.0	6.5	0.06	0.07	0.11
1766	747.0	753.5	6.5	0.09	0.17	0.16
1767	753.5	761.0	7.5	2.21	4.20	8.36
1768	761.0	766.0	5.0	1.32	2.08	4.26
	766.0	770.3	4.3	NOT ASSAYED		
1769	770.3	774.2	3.9	1.12	3.15	7.61
	774.2	778.5	4.3	NOT ASSAYED		
1770	778.5	785.0	6.5	3.28	7.33	14.54

19.1 ft Ag 1.72%  
Pb 3.14% Zn 5.06%

12.5 ft Ag 1.85%  
Pb 3.25% Zn 7.92%

LOCATION 82 W 6 N. DIP AT COLLAR. 90°  
 ELEVATION { 4316.32 ft BEARING.  
 1315.8 M DEPTH. 1399.0 ft (426.42 m)

536.8 - 546.0 = 9.2 ft. Ag 2.03 ozs  
 Pb 4.5%  
 Zn 6.82%

586.3 - 589.4 = 3.1 ft. Ag 1.62 ozs. Pb. 3.45% Zn 5.64%

653.6 - 676.0 = 22.4 ft. Ag 1.18 ozs  
 Pb 2.85%  
 Zn 3.86%  
 LOW.

721.4 - 785.0 = 63.6 ft  
 Ag 1.30 ozs.  
 Pb 2.57%  
 Zn 5.05%

753.5 - 774.2 = 20.7 ft Ag 1.33 ozs  
 Pb 2.61%  
 Zn 6.21%  
 753.2 - 785.0 = 31.8 ft  
 Ag 1.53 ozs  
 Pb 3.20%  
 Zn 7.01%

CONTINUED ON  
 PAGES 14 & 15

ASSAY No	SECTION - FEET		LENGTH FEET	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
1771	785.0	788.0	3.0	0.38	0.55	2.34
	788.0	817.0	29.0	NOT ASSAYED		
1772	817.1	822.1	5.0	1.65	3.68	4.68
1773	822.1	832.6	10.5	0.35	1.20	1.52
1774	832.6	836.1	3.5	0.32	0.75	1.04
	836.1	1025.1	189.0	NOT ASSAYED		
1775	1025.1	1028.2	3.1	0.44	0.63	0.34
1776	1028.2	1039.9	11.7	0.94	1.73	2.88
1777	1039.9	1042.2	2.3	1.09	2.20	3.54
1778	1042.2	1048.0	5.8	2.41	4.13	6.15
1779	1048.0	1052.8	4.8	3.24	4.80	7.70
1780	1052.8	1058.6	5.8	1.53	3.15	5.16
1781	1058.6	1059.6	1.0	1.47	2.78	0.50
	1059.6	1062.0	2.4	NOT ASSAYED		
1782	1062.0	1063.2	1.2	0.41	0.38	0.12
1783	1063.2	1072.6	9.4	2.09	4.28	5.28
1786	1072.6	1074.6	2.0	0.62	0.73	0.28
	1074.6	1078.9	4.3	NOT ASSAYED		
1787	1078.9	1084.5	5.6	2.50	5.71	6.48
1788	1084.5	1089.0	4.5	2.12	4.58	7.68
1789	1089.0	1099.0	10.0	2.50	4.73	8.48
1790	1099.0	1105.5	6.5	2.79	4.65	10.07
1793	1105.5	1107.7	2.2	0.41	0.75	1.42
	1107.7	1141.2	33.5	NOT ASSAYED		
1791	1141.2	1149.0	7.8	0.88	1.10	1.88
	1149.0	1151.6	2.6	NOT ASSAYED		
1792	1151.6	1154.0	2.4	1.56	3.68	3.18
	1154.0	1293.9	139.9	NOT ASSAYED		
1794	1293.9	1297.8	3.8	1.38	6.02	8.71
	1297.8	1399.0	101.2	0.00	0.00	0.00

817.1 - 822.1 = 5.0 ft. Ag 1.65% Pb 3.68% Zn 4.68%

1039.9 - 1059.6 = 19.7 ft

1028.2 - 1058.6 = 30.4 ft

16.4 ft Ag 2.34% Pb 3.97% Zn 6.25%

Ag 2.15% Pb 2.98% Zn 5.64%

Ag 1.75% Pb 2.60% Zn 4.76%

1063.2 - 1072.6 = 9.4 ft. Ag 2.09% Pb 4.28% Zn 5.28%

1078.9 - 1105.5 = 26.6 ft

1063.2 - 1105.5 = 42.3

Ag 2.5% Pb 4.89% Zn 8.31%

Ag 2.07% Pb 4.06% Zn 6.41%

1151.6 - 1154.0 = 2.4 ft. Ag 1.56% Pb 3.68% Zn 3.18%

END OF HOLE

1  
2  
changed to 1



ASSAY No	SECTION (FEET)		LENGTH	ASSAYS			
	FROM	TO		FEET	Ag. <del>ozs</del>	Pb %	
	0.0	382.0	382.0	0.00	0.00	0.00	
2058	382.0	387.5	5.5	2.32	5.70	9.55	12.0 ft Ag 1.41 ozs Pb 3.69%
2059	387.5	394.0	6.5	0.65	2.00	3.90	Zn 6.49%
2060	394.0	401.0	7.0	0.53	1.50	2.46	
2061	401.0	411.0	10.0	0.47	1.58	2.40	
2062	411.0	417.0	6.0	0.62	1.04	3.84	
2063	417.0	422.5	5.0	0.59	1.23	2.46	
	422.5	425.0	2.5	NOT ASSAYED			
2064	425.0	426.3	1.3	0.74	1.65	3.09	
	426.3	439.5	13.2	NOT ASSAYED			
2065	439.5	444.0	4.5	0.76	0.98	2.34	
2066	444.0	446.0	2.0	2.50	4.05	7.44	
2067	446.0	453.5	7.5	0.77	1.18	1.48	
2068	453.5	462.0	8.5	2.74	6.19	12.44	16.5 ft Ag 2.55 ozs Pb 5.62%
2069	462.0	470.0	8.0	2.35	5.03	9.84	Zn 11.17%
2070	470.0	480.0	10.0	1.21	2.70	6.00	
2071	480.0	485.0	5.0	1.12	2.38	5.40	
2072	485.0	494.0	9.0	0.83	1.33	3.12	
2073	494.0	503.0	9.0	1.27	2.06	4.14	
2074	503.0	513.0	10.0	1.30	2.05	4.56	
2075	513.0	516.5	3.5	1.27	2.08	4.56	
2076	516.5	517.5	1.0	0.12	0.33	0.83	
	517.5	528.0	10.5	NOT ASSAYED			
2077	528.0	529.0	1.0	1.38	3.00	6.67	
	529.0	543.3	14.3	NOT ASSAYED			
2078	543.3	548.0	4.7	1.18	2.78	5.26	
2079	548.0	556.0	8.0	1.15	2.00	4.74	
2080	556.0	559.5	3.5	1.32	2.74	4.20	
	559.5	580.0	20.5	NOT ASSAYED			
2081	580.0	586.0	6.0	2.12	4.28	4.14	
	586.0	649.0	63.0	NOT ASSAYED			
2082	649.0	653.0	4.0	2.82	5.03	10.50	8.0 ft Ag 2.85 ozs Pb 5.18%
2083	653.0	657.0	4.0	2.87	5.33	11.65	Zn 11.08%
	657.0	659.0	2.0	NOT ASSAYED			
2084	659.0	660.0	1.0	0.88	1.85	2.58	
	660.0	669.5	9.5	NOT ASSAYED			
2090	669.5	672.0	2.5	1.68	4.28	6.55	15.5 ft Ag 2.46 ozs
2085	672.0	675.0	3.0	2.35	5.68	8.77	Pb 6.40%
2086	675.0	682.5	7.5	3.03	7.87	10.83	Zn 8.86%
2087	682.5	685.0	2.5	1.68	5.03	8.40	

LOCATION T4 W 6 N.

DIP AT COLLAR 90°

ELEVATION 4310.92 ft.

BEARING

(1313.97 M)

DEPTH 1118 ft (340.77 M)

382.0 - 422.5 = 40.5 ft

Ag 0.79 ogs

Pb 2.05%

Zn 3.81%

LOW.

444.0 - 516.5 = 72.5 ft

Ag 1.31 ogs

Pb 2.85%

Zn 5.85%

528.0 - 529.0 = 1.0 ft Ag 1.38 ogs Pb 3.00% Zn 6.67%

543.3 - 559.5 = 16.2 ft Ag 1.19 ogs.

Pb 2.38%

Zn 4.77%

580.0 - 586.0 = 6.0 ft Ag 2.12 ogs Pb 4.28% Zn 4.14%

See Overleaf

Continued on  
Pages 18 & 19.

ASSAY No SECTION FEET LENGTH From No FEET Ag grs Pb % Zn %

2088 687.0 689.0 2.0 1.97 5.64 6.24 NOT ASSAYED

2089 691.3 693.0 1.7 1.18 3.08 3.35

2090 696.0 698.2 7.2 0.74 1.78 1.44

2091 693.0 696.0 3.0 0.32 0.95 0.86

2092 703.2 703.2 7.2 0.74 1.78 1.44

2093 708.2 708.0 4.8 4.65 7.51 13.31

2094 708.0 715.0 7.0 3.68 8.30 14.13

2095 715.0 722.6 7.6 1.85 4.28 6.00

2096 722.6 727.5 4.9 1.59 3.45 4.74

2097 727.5 731.0 3.5 0.44 1.25 1.86

2111 731.0 735.0 4.0 0.32 0.56 0.72

2098 735.0 705.5 170.5 NOT ASSAYED

2098 905.5 908.6 3.1 1.50 3.75 6.76

2099 908.6 914.0 5.4 0.03 0.01 0.06

2100 914.0 939.0 25.0 NOT ASSAYED

2100 939.0 941.0 2.0 0.09 0.28 0.46

1832 941.0 950.0 9.0 0.74 2.28 2.79

1832 950.0 981.0 31.0 NOT ASSAYED

1832 981.0 984.0 3.0 0.29 0.74 1.54

1834 984.0 988.0 4.0 1.44 3.83 5.59

1835 988.0 992.0 4.0 0.12 0.25 0.40

1836 992.0 994.0 2.0 1.29 2.78 4.80

1837 994.0 998.0 4.0 2.21 5.18 7.42

1838 998.0 1001.2 3.2 0.44 0.88 0.91

1839 1001.2 1002.5 1.3 1.06 2.48 3.24

1840 1002.5 1005.0 2.5 0.88 1.65 2.63

1841 1005.0 1010.0 5.0 0.29 0.60 0.24

1842 1010.0 1014.5 4.5 0.47 1.50 0.54

1843 1014.5 1018.0 3.5 1.44 4.88 3.00

1844 1018.0 1020.0 2.0 0.26 0.28 0.40

1845 1020.0 1029.0 9.0 0.59 1.14 0.94

1029.0 1033.0 4.0 NOT ASSAYED

1846 1033.0 1042.0 9.0 0.12 0.13 0.12

1847 1042.0 1047.0 5.0 0.09 0.09 0.20

1047.0 1074.0 27.0 NOT ASSAYED

1848 1074.0 1080.0 6.0 0.12 0.13 0.37

1080.0 1118.0 38.0 0.00 0.00 0.00

END OF HOLE

11.8 ft Ag 4.07% Pb 1.97% Zn 13.79%

649.0 - 727.5 = 78.5 ft

Ag 1.83 ops  
Pb 4.05%  
Zn 6.25%

905.5 - 908.6 = 3.1 ft Ag 1.50 ops Pb 3.75% Zn 6.76%

984.0 - 988.0 = 4.0 ft Ag 1.44 ops Pb 3.83% Zn 5.59%

984.0 - 998.0 = 14.0 ft

992.0 - 998.0 = 6.0 ft Ag 1.90 ops Pb 4.38%  
Zn 6.54%

Ag 1.26 ops  
Pb 3.13%  
Zn 4.51%

984.0 - 1018.0 = 34 ft

Ag 0.91 ops  
Pb 2.34%  
Zn 2.67% } LOW

1014.5 - 1018.0 = 3.5 ft Ag 1.44 ops Pb 4.88% Zn 3.00%

20  
 No/E

TDRH A. 89

All measurements are in METRES.

ASSAY N°	SECTION - METRES		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag. %	Pb %	Zn %
	0.00	94.92	94.92	0.00	0.00	0.00
1797	94.92	95.40	0.40	0.29	0.83	2.46
1798	95.40	96.32	0.92	1.03	2.18	5.80
1799	96.32	96.62	0.30	1.27	3.08	4.14
1800	96.62	97.84	1.22	1.12	2.43	4.32
2501	97.84	99.15	1.29	1.18	2.67	3.24
2502	99.15	100.63	1.48	0.94	1.93	3.48
2503	100.63	102.02	1.39	0.71	1.65	3.06
	102.02	142.96	40.94	NOT ASSAYED		
2504	142.96	143.33	0.37	2.18	4.50	7.78
2505	143.33	144.27	0.94	1.50	2.35	2.70
2506	144.27	145.69	1.42	1.47	4.20	3.18
2507	145.69	148.09	2.40	1.65	4.50	6.79
2508	148.09	149.02	0.93	1.35	3.15	5.44
2509	149.02	151.20	2.18	0.47	1.15	2.10
2510	151.20	152.54	1.34	0.26	0.60	1.22
2511	152.54	155.11	2.57	0.35	0.88	1.05
	155.11	156.86	1.75	NOT ASSAYED		
2512	156.86	157.51	0.65	1.32	3.23	6.60
	157.51	162.21	4.70	NOT ASSAYED		
2513	162.21	163.78	1.57	1.91	3.90	7.44
2514	163.78	165.51	1.70	0.44	0.93	1.74
2515	165.51	168.01	2.50	0.65	1.13	1.14
	168.01	178.69	10.68	NOT ASSAYED		
2516	178.69	180.34	1.65	2.35	4.65	7.55
	180.34	180.66	0.32	NOT ASSAYED		
2517	180.66	182.03	1.37	1.47	3.60	5.76
	182.03	259.90	77.87	NOT ASSAYED		
2518	259.90	260.70	0.80	2.12	5.03	9.50
	260.70	269.80	9.10	NOT ASSAYED		
2519	269.80	272.00	2.20	2.74	5.75	9.32
	272.00	280.80	8.80	NOT ASSAYED		
2520	280.80	281.55	0.75	1.41	2.85	7.22
	281.55	281.90	0.35	NOT ASSAYED		
2521	281.90	282.75	0.85	1.73	3.60	6.22
	282.75	283.30	0.55	NOT ASSAYED		

Continued on Pages 22 + 23

LOCATION 82W, 8N DIP AT COLLAR.  $90^\circ$   
 ELEVATION  $\left\{ \begin{array}{l} 4315.49 \text{ ft} \\ 1315.36 \text{ m} \end{array} \right.$  BEARING  
 DEPTH. 1240 ft (377.95 m)

95.40 - 97.84 = 2.44 M. Ag 1.10 ozs  
 Pb 2.41%  
 Zn 4.85%

95.40 - 102.02 = 6.62 M. Ag 0.99 ozs.  
 Pb 2.18%  
 Zn 3.84%

142.96 - 149.02 = 6.06 M.

Ag 1.57 ozs.  
 Pb 3.88%  
 Zn 5.16%

156.86 - 157.51 = 0.65 M. Ag 1.32 ozs. Pb 3.23% Zn 6.60%

162.21 - 163.78 = 1.57 M Ag 1.91 ozs Pb 3.90% Zn 7.44%

178.69 - 182.03 = 3.34 M. Ag 1.76 ozs Pb 3.77%  
 Zn 6.09%

259.9 - 260.7 = 0.8 M. Ag 2.12 ozs Pb 5.03% Zn 9.5%.

269.8 - 272.0 = 2.2 M Ag 2.74 ozs Pb 5.75% Zn 9.32%

280.8 - 291.3 = 10.5 M.

Ag 1.12 ozs  
 Pb 2.59%  
 Zn 4.10%

ASSAY N <sup>o</sup>	SECTION - METRES		LENGTH METRES	ASSAYS		
	FROM	TO		Ag. ogs	Pb%	Zn%
2522	283.30	285.00	1.70	1.27	2.45	6.83
2523	285.00	288.40	3.40	0.83	1.93	3.24
2524	288.40	291.30	2.90	1.47	3.90	3.36
2525	291.30	291.80	0.50	0.56	1.08	0.90
	291.80	293.30	1.50	NOT ASSAYED		
2526	293.30	294.90	1.60	0.53	1.43	1.16
	294.90	296.00	1.10	NOT ASSAYED		
2527	296.00	297.30	1.30	2.50	5.40	7.38
	297.30	342.80	45.50	NOT ASSAYED		
2528	342.80	344.40	1.60	0.03	0.05	0.30
2529	344.40	347.70	3.30	0.24	0.21	0.38
2530	347.70	349.80	2.10	0.03	0.03	0.03
	349.80	352.70	2.90	NOT ASSAYED		
2531	352.70	356.70	4.00	0.09	0.08	0.14
2532	356.70	357.60	0.90	0.03	0.09	0.16
	357.60	358.00	0.40	NOT ASSAYED		
2533	358.00	359.80	1.80	1.50	2.50	3.84
	359.80	366.00	6.20	NOT ASSAYED		
2534	366.00	366.90	0.90	1.68	3.83	4.08
	366.90	369.50	2.60	NOT ASSAYED		
2535	369.50	371.10	1.60	1.29	3.30	3.60
2536	371.10	372.50	1.40	1.03	3.42	2.82
2537	372.50	374.00	1.50	1.18	4.43	3.42
2538	374.00	377.00	3.00	1.00	2.93	1.90
2539	377.00	378.00	1.00	0.56	0.70	0.52
				END OF HOLE		

SEE INTERSECTION  
ON  
PREVIOUS PAGE

$296.0 - 297.3 = 1.3m$ . Ag 2.50ops. Pb 5.40% Zn 7.38%

$358.0 - 359.8 = 1.8m$ . Ag 1.5ops. Pb 2.50% Zn 3.84%

$366.0 - 366.9 = 0.9m$ . Ag 1.68ops. Pb 3.83% Zn 4.08%

$366.0 - 374.0 = 8.0m$ .

$369.5 - 374.0 = 4.5m$ . Ag 1.17ops  
Pb 3.71%  
Zn 3.29%

Ag - 0.84ops  
Pb 2.52%  
Zn 2.31%

how

NOTE All measurements are in METRES

ASSAY NO	SECTION METRES		LENGTH METRES	ASSAYS		
	FROM	TO		Ag. ogs	Pb%	Zn%
	0.00	49.25	49.25	0.00	0.00	0.00
1849	49.25	51.65	2.40	1.21	2.40	5.16
1850	51.65	53.65	2.00	0.06	0.13	1.08
1851	53.65	56.50	2.85	0.77	1.45	3.90
	56.50	57.67	1.17	NOT ASSAYED		
1852	57.67	61.50	3.83	0.91	1.88	4.44
	61.50	62.40	0.90	NOT ASSAYED		
1856	62.40	63.30	0.90	1.00	2.08	5.04
	63.30	63.67	0.37	NOT ASSAYED		
1853	63.67	64.70	1.03	0.74	1.50	3.72
1854	64.70	66.50	1.80	0.71	1.48	3.42
	66.50	68.45	1.95	NOT ASSAYED		
1855	68.45	69.77	1.32	0.44	1.18	1.58
	69.77	70.20	0.43	NOT ASSAYED		
1857	70.20	72.50	2.30	0.50	0.87	1.64
	72.50	77.39	4.89	NOT ASSAYED		
1858	77.39	79.05	1.66	1.79	4.60	7.56
1859	79.05	79.90	0.85	0.35	0.70	1.82
1860	79.90	82.65	2.75	3.21	7.43	10.70
1862	82.65	84.70	2.05	0.74	1.68	5.40
1863	84.70	86.95	2.25	1.12	2.18	5.04
1864	86.95	88.90	1.95	1.29	3.45	6.60
1865	88.90	90.00	1.10	0.59	1.88	1.88
1866	90.00	91.00	1.00	1.00	2.38	2.46
1867	91.00	92.00	1.00	1.94	4.35	7.08
1868	92.00	93.00	1.00	2.24	5.11	6.13
1869	93.00	93.95	0.95	1.47	3.60	4.08
1870	93.95	94.60	0.65	1.76	3.83	8.72
1871	94.60	94.85	0.25	2.09	4.13	9.60
1872	94.85	96.40	1.55	0.15	0.35	0.40
1873	96.40	98.50	2.10	1.76	3.75	5.52
1874	98.50	99.50	1.00	1.30	3.23	4.14
	99.50	101.95	2.45	NOT ASSAYED		
1875	101.95	104.00	2.05	1.29	3.12	5.52
1876	104.00	105.00	1.00	2.48	5.88	9.51
1877	105.00	106.00	1.00	1.59	4.28	8.50
1878	106.00	107.00	1.00	3.65	8.91	15.64
1879	107.00	108.00	1.00	3.03	6.94	13.64
	108.00	206.00	98.00	NOT ASSAYED		

3.85 M.

Ag 1.88 ogs

Pb 4.25%

Zn 9.04%

4.00 M.

Ag 2.68 ogs

Pb 6.5%

Zn 11.83

LOCATION 8 N 74 W.

DIP AT COLLAR 90°

ELEVATION { 4306.84 ft

BEARING

1312.72 M.

DEPTH. ~~177 ft (53.9 m)~~ 316.4 m

49.25 - 51.65 = 2.4 M. Ag 1.21 ozs Pb 2.4% Zn 5.16%

62.4 - 63.3 = 0.9 M. Ag 1.00 ozs. Pb 2.08% Zn 5.04%

77.39 - 99.50 = 22.11 M

Ag 1.48 ozs

Pb 3.44%

Zn 5.64%

77.39 - 108.00 = 30.61 M

Ag 1.50 ozs

Pb 3.54%

Zn 5.99%

ASSAY N°	SECTION - METRES		LENGTH METRES	ASSAYS					
	FROM	TO		Ag ogs	Pb %	Zn %			
1880	206.00	207.00	1.00	2.65	4.69	6.05			
	207.00	213.30	6.30	NOT ASSAYED					
1881	213.30	214.60	1.30	1.82	4.80	7.83	2.9m	Ag 1.99 ogs	213.3 - 218.2 = 4.9 M. Ag 1.52 ogs. Pb 3.71 % Zn 6.29 %
1882	214.60	215.40	0.80	2.94	7.50	12.32	●	Pb 5.17 %	
1883	215.40	216.20	0.80	1.32	3.19	5.04		Zn 8.37 %	
1884	216.20	216.80	0.60	0.74	1.78	3.36			
1885	216.80	218.20	1.40	0.59	1.68	3.06			
	218.20	264.70	46.50	NOT ASSAYED					
1886	264.70	266.00	1.30	1.65	4.50	5.28			264.7 - 273.1 = 8.4 M. Ag 0.77 ogs Pb 4.14 % Zn 3.42 %
1887	266.00	267.50	1.50	0.38	1.00	0.72			
1888	267.50	268.70	1.20	1.09	2.50	3.60			
1889	268.70	269.80	1.10	0.24	0.35	0.29			
1890	269.80	271.00	1.20	3.15	10.80	5.88	3.3m	Ag 2.25 ogs	
1891	271.00	271.90	0.90	1.76	5.20	3.54	●	Pb 6.84 %	
1892	271.90	273.10	1.20	1.73	4.13	4.98		Zn 4.91 %	
?	273.10	<del>329.80</del> 316.4	<del>266.70</del> 43.3	0.00	0.00	0.00			END OF HOLE

213.3 - 218.2 = 4.9 M.  
Ag 1.52 ogs.  
Pb 3.71 %  
Zn 6.29 %

264.7 - 273.1 = 8.4 M.  
Ag 0.77 ogs  
Pb 4.14 %  
Zn 3.42 %

*ll*

ASSAY No	SECTION (M)		LENGTH METRES.	ASSAYS		
	FROM	TO		Ag. <i>Ag</i>	Pb <i>Pb</i>	Zn <i>Zn</i>
2112	0.0	398.9	398.9	0.00	0.00	0.00
	398.9	400.7	1.8	0.35	1.00	1.54
	400.7	402.5	1.8	NOT ASSAYED		
2113	402.5	405.0	2.5	0.41	1.48	2.94
	405.0	539.8	134.8	0.00	0.00	0.00

END OF HOLE

LOCATION 10N 112W.

DIP AT COLLAR. -90°

ELEVATION { 4265.57 ft  
1300.15 M

BEARING

DEPTH 1771 ft (539.8 m)

22

ASSAY No	SECTION (M)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ogs	Pb %	Zn %
	0.0	49.4	49.4	0.00	0.00	0.00
1893	49.4	50.3	0.9	1.21	2.08	3.42
1894	50.3	51.2	0.9	1.47	3.75	4.92
1895	51.2	52.4	1.2	2.03	5.73	4.02
1896	52.4	53.9	1.5	4.59	10.65	16.76
1897	53.9	54.9	1.0	3.53	8.62	14.07
1898	54.9	55.8	0.9	1.85	3.98	7.22
1899	55.8	56.7	0.9	2.53	5.63	11.01
	56.7	189.6	132.9	NOT ASSAYED		
1900	189.6	190.5	0.9	2.38	5.58	7.04
2212	190.5	191.5	1.0	1.59	3.68	5.48
2213	191.5	192.5	1.0	3.35	8.12	7.55
2214	192.5	193.3	0.8	2.65	6.78	5.28
2215	193.3	194.3	1.0	0.29	0.70	0.70
	194.3	288.6	94.3	0.00	0.00	0.00

END OF HOLE

LOCATION: 10N. 74W  
 ELEVATION: 4302.94 ft  
 (1311.54 M)

DIP AT COLLAR: 90°  
 BEARING:  
 DEPTH 947 ft (288.6 M)

49.4 - 56.7 = 7.3 m.

Ag 2.63 ogs  
 Pb 5.27%  
 Zn 9.31%

189.6 - 193.3 = 3.7 m.

Ag 2.54 ogs  
 Pb 6.01%  
 Zn 6.38%

ASSAY NO	SECTION (M)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag <sup>ggs.</sup>	Pb%	Zn%
2540	0.0	76.6	76.6	0.00	0.00	0.00
	76.6	78.5	1.9	1.09	2.03	4.94
2541	78.5	79.1	0.6	NOT ASSAYED		
	79.1	81.9	2.8	1.27	2.50	5.04
2542	81.9	82.3	0.4	NOT ASSAYED		
	82.3	83.6	1.3	0.26	0.28	0.42
	83.6	87.5	3.8	0.35	0.62	1.02
2544	87.5	106.4	18.9	NOT ASSAYED		
	106.4	109.7	3.3	0.47	0.83	2.00
2545	109.7	112.8	3.1	0.65	1.33	2.58
	112.8	139.3	27.5	NOT ASSAYED		
2551	139.3	140.8	1.5	0.80	1.78	1.70
	140.8	142.0	1.2	NOT ASSAYED		
2552	142.0	143.6	1.6	2.09	4.50	8.49
	143.6	288.8	145.2	NOT ASSAYED		
2546	288.8	290.8	2.0	2.21	4.88	4.56
	290.8	298.4	7.6	NOT ASSAYED		
2547	298.4	300.9	2.5	0.38	0.88	1.62
2548	300.9	302.1	1.2	0.62	1.43	3.30
2549	302.1	302.7	0.6	1.68	3.38	5.88
	302.7	303.5	0.8	NOT ASSAYED		
2550	303.5	304.6	1.1	0.62	1.43	1.70
	304.6	350.5	45.9	0.00	0.00	0.00

END OF HOLE


LOCATION 10N 82W.      DIP AT COLLAR 90°  
 ELEVATION { 4308.99 ft  
                   1313.38 M      BEARING.  
 DEPTH 1150.0 ft (350.5 M)

76.6 - 78.5 = 1.9 M. Ag 1.09 ggs Pb 2.03% Zn 4.94%      76.6 - 81.9 = 5.3 M.  
 Ag 1.06 ggs Pb 2.05%  
 79.1 - 81.9 = 2.8 M Ag 1.27 ggs Pb 2.50% Zn 5.04%      Zn 4.43%

142.0 - 143.6 = 1.6 M. Ag 2.09 ggs Pb 4.50%, Zn 8.49%

288.8 - 290.8 = 2.0 M Ag 2.21 ggs Pb 4.88%, Zn 4.56%

300.9 - 302.7 = 1.8 M. Pb 2.08%  
 302.1 - 302.7 = 0.6 M Ag 1.68 ggs Pb 3.38% Zn 5.88%      Ag 0.97 ggs Zn 4.16%



ASSAY NO	SECTION (METRES)		LENGTH METRES	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
0.0	301.1	301.1	0.00	0.00	0.00	
END OF HOLE						

LOCATION 16N 108W  
 ELEVATION 4296.69 ft  
 1309.63 m  
 DIP AT COLLAR  
 BEARING  
 DEPTH 988 ft (301.1 m)

ll

ASSAY NO	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ogs	Pb %	Zn %
	0.0	51.0	51.0	0.00	0.00	0.00
2216	51.0	51.9	0.9	2.18	5.33	9.90
2217	51.9	58.8	0.9	5.06	10.50	16.61
2218	58.8	60.4	1.6	1.44	3.15	4.50
2219	60.4	61.6	1.2	1.06	2.03	2.58
2220	61.6	63.4	1.8	1.76	3.83	6.48
2221	63.4	66.0	2.6	2.31	5.55	8.53
	66.0	213.4	147.4	0.00	0.00	0.00

END OF HOLE

LOCATION 8 N 72 W  
 ELEVATION } 4209.10 ft  
 1282.93 M

DIP AT COLLAR. 90°  
 BEARING  
 DEPTH 700 ft (213.36 M.)

FROM 51.0 M - 66.0 M = 9.0 M.

Ag 2.14 ogs.

Pb 4.78%

Zn 7.56%

ll

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag. o/s	Pb %	Zn %
2553	0.0	49.4	49.4	0.00	0.00	0.00
	49.4	53.1	3.7	0.53	1.03	2.10
2554	53.1	56.7	3.6	0.94	2.50	3.66
2555	56.7	57.7	1.0	1.59	3.68	6.00
2556	57.7	58.7	1.0	0.74	1.83	5.88
	58.7	59.7	1.0	NOT ASSAYED		
2557	59.7	62.2	2.5	1.32	2.78	5.88
2558	62.2	63.4	1.2	1.65	3.45	6.93
2559	63.4	66.1	2.7	1.03	2.43	5.64
2560	66.1	68.3	2.2	1.59	3.15	10.52
2561	68.3	69.8	1.5	0.97	1.68	8.30
	69.8	89.3	19.5	NOT ASSAYED		
2562	89.3	92.4	3.1	0.97	2.15	4.44
2563	92.4	94.1	1.7	1.32	3.08	6.70
2564	94.1	94.6	0.5	4.52	8.37	23.93
	94.6	134.4	39.8	NOT ASSAYED		
2565	134.4	135.3	0.9	3.27	6.67	11.39
2566	135.3	136.9	1.6	3.24	9.61	13.15
2567	136.9	139.3	2.4	4.44	10.27	16.58
2568	139.3	142.3	3.0	4.12	8.97	17.28
2569	142.3	143.3	1.0	3.38	7.88	18.33
2570	143.3	145.1	1.8	4.04	9.87	23.51
2571	145.1	146.3	1.2	3.68	7.20	20.30
2572	146.3	148.4	2.1	2.88	6.00	14.13
2573	148.4	149.1	0.7	5.18	9.63	22.31
2574	149.1	150.3	1.2	3.65	7.53	17.61
2575	150.3	151.5	1.2	4.15	7.20	17.92
	151.5	END OF HOLE				

LOCATION 6N. 70W      DIP AT COLLAR. 90°  
 ELEVATION 4276.86 ft      BEARING  
1303.59 m      DEPTH 497 ft (151.49 m)

<sup>174.2</sup> <sup>192.6</sup> = <sup>18.4</sup>  
53.1 m - 58.7 m = 5.6 m.

Ag 1.02 o/s.  
 Pb 2.59%.  
 Zn 4.44%

<sup>174.2</sup> <sup>229.0</sup> <sup>54.8</sup>  
53.1 m - 69.8 m = 16.7 m

Ag 1.12 o/s.  
 Pb 2.49%.  
 Zn 5.32%

59.7 m - 69.8 m = 10.1 m

Ag 1.29 o/s.  
 Pb 2.68%.  
 Zn 6.68%

<sup>293</sup> <sup>310.4</sup> <sup>17.4</sup>  
89.3 m - 94.6 m = 5.3 m.

Ag 1.42 o/s      Pb 3.03%.  
 Zn 7.00%

<sup>440.9</sup> <sup>497.0</sup> <sup>56.1</sup>  
134.4 m - 151.5 m = 17.1 m.

Ag 3.82 o/s  
 Pb 8.44%  
 Zn 17.30%

ll

ASSAY NO	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
	0.0	19.1	19.1	0.00	0.00	0.00
2114	19.1	20.4	1.3	0.88	1.40	1.54
2115	20.4	22.4	2.0	0.88	0.50	0.38
2116	22.4	23.5	1.1	0.24	0.10	0.18
	23.5	99.97	76.27	0.00	0.00	0.00

END OF HOLE

LOCATION 16 N 128 W.  
 ELEVATION 4248 ft.  
 1294.79 m.  
 DIP AT COLLAR 90°  
 BEARING  
 DEPTH 328 ft. (99.97 m)

ASSAY NO	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
	0.0	24.2	24.2	0.00	0.00	0.00
2117	24.2	26.8	2.6	1.03	2.70	2.64
	26.8	145.5	118.7	0.00	0.00	0.00
END OF HOLE						

LOCATION 14 N 128 W      DIP AT COLLAR 90°  
 ELEVATION 4318.23 ft      BEARING \_\_\_\_\_  
1310.196 m      DEPTH ~~417~~ ft (145.5 m)

ASSAY NO	SECTION (METRES)			ASSAYS		
	FROM	TO	LENGTH (METRES)	Ag o/s	Pb %	Zn %
	0.0	62.4	62.4	0.00	0.00	0.00
2222.	62.4	64.0	1.6	0.62	1.33	4.38
	64.0	138.5	74.5 M	NOT ASSAYED		
2223.	138.5	139.5	1.0	1.91	4.50	5.04
	139.5	140.5	1.0 M	NOT ASSAYED		
2224	140.5	141.6	1.1	2.82	8.08	7.35
2225	141.6	142.3	0.7	1.21	2.43	5.40
2226	142.3	143.9	1.6	1.18	3.83	4.38
2227	143.9	145.4	1.5	1.21	3.08	4.32
2228	145.4	147.5	2.1	0.88	2.30	3.30
2229	147.5	150.2	2.7	2.18	5.63	7.43
2230	150.2	152.5	2.3	2.06	4.73	7.84
2231	152.5	153.2	0.7	1.32	3.00	3.96
2232	153.2	154.2	1.0	2.97	6.90	10.31
2233	154.2	155.9	1.7	0.91	1.93	1.08
2234	155.9	157.6	1.7	0.47	0.95	0.34
2235	157.6	160.6	3.0	0.26	0.23	0.16
2236	160.6	163.7	3.1	0.21	0.13	0.08
2237	163.7	166.4	2.7	0.32	0.33	0.54
2238	166.4	170.4	4.0	0.65	1.43	1.00
2239	170.4	173.4	3.0	0.18	0.23	0.58
2240	173.4	176.8	3.4	0.29	0.78	1.34
2241	176.8	178.3	1.5	0.18	0.35	0.66
2242	178.3	181.7	3.4	0.03	0.20	0.34
	181.7	189.6	7.9	0.00	0.00	0.00

END OF HOLE

LOCATION bn 66W  
ELEVATION. { 4253.30 ft  
1296.41 m

DIP AT COLLAR. 90°  
BEARING.  
DEPTH: 622 ft. 189.59 M.

204.7 210 5.3  
62.4m - 64.0m = 1.6m Ag. 0.62 o/s  
Pb 1.33% Zn 4.38% LOW.

454.4 505.9 51.5  
138.5m - 154.2m = 15.7m

140.5m - 154.2m = 13.7m

Ag 1.75 o/s  
Pb 4.47%  
Zn 6.09%

Ag 1.65 o/s  
Pb 4.19%  
Zn 5.64%

u

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ozs	Pb %	Zn %
	0.0	65.4	65.4	0.00	0.00	0.00
2243	65.4	66.2	1.2	5.15	10.35	10.50
	66.2	67.4	1.2	NOT ASSAYED		
2244	67.4	68.7	1.3	5.15	11.55	12.29
	68.7	68.9	0.2	NOT ASSAYED		
2245	68.9	70.1	1.2	1.15	3.00	4.62
	70.1	71.2	1.1	NOT ASSAYED		
2246	71.2	73.5	2.3	4.47	11.10	11.11
	73.5	81.3	7.8	NOT ASSAYED		
2247	81.3	82.8	1.5	3.03	6.68	9.17
	82.8	88.8	6.0	NOT ASSAYED		
2248	88.8	89.6	0.8	3.38	8.25	8.46
	89.6	90.9	1.3	NOT ASSAYED		
2249	90.9	92.2	1.3	3.82	9.45	9.23
2250	92.2	93.4	1.2	1.73	4.13	4.14
2251	93.4	94.1	0.7	0.24	0.55	0.96
	94.1	174.7	80.6	NOT ASSAYED		
2252	174.7	175.6	0.9	3.53	7.65	11.40
2253	175.6	176.5	0.9	2.88	6.23	10.05
2254	176.5	178.2	1.7	3.47	7.50	11.67
2255	178.2	179.2	1.0	1.18	2.25	3.18
2256	179.2	180.7	1.5	2.06	4.65	5.96
2257	180.7	181.4	0.7	1.41	3.30	5.58
2258	181.4	181.9	0.5	1.35	3.60	6.31
2259	181.9	182.3	0.4	2.27	4.88	7.30
2260	182.3	183.2	0.9	1.29	3.08	4.38
2261	183.2	184.4	1.2	0.97	2.08	4.08
2262	184.4	185.4	1.0	1.41	2.93	4.38
	185.4	250.5	75.1	0.00	0.00	0.00

END OF HOLE

LOCATION 8 N. 70 W. DIP AT COLLAR 90°  
 ELEVATION { 4223.91 ft BEARING  
 1287.45 m DEPTH 822 ft (250.54 m)

65.4m - 73.5m = 8.1m.

Ag. 3.02 ozs.

Pb 6.98%

Zn 7.36%

65.4m - 93.4m = 28.0m.

Ag 1.38 ozs

Pb 3.23%

Zn 3.47%

LOW.

81.3m - 82.8m = 1.5m Ag. 3.03oz

Pb 6.68% Zn 9.17%

88.8m - 93.4m = 4.6m

Ag. 2.11ozs Pb 5.18%

Zn. 5.16%

174.7m - 185.4m = 10.7m

Ag 2.08 ozs.

Pb 4.55%

Zn. 6.96%

92

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag. age	Pb %	Zn %
	0.0	269.7	269.7	0.00	0.00	0.00
END OF HOLE						

LOCATION 14 N. 124 W.

DIP AT COLLAR. 90°

ELEVATION { 4314.28 ft

BEARING

{ 1314.99 m

DEPTH. 875 ft. (269.7 m).

*q*

DDH A 102 (VANCOUVER MINES)

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ogs	Pb %	Zn %
	0.0	137.1	137.1	0.00	0.00	0.00
2516	137.1	139.3	2.2	0.77	1.76	2.40
2517	139.3	140.3	1.0	3.44	10.18	9.58
2518	140.3	142.0	1.7	0.74	1.23	1.58
	142.0	183.4	41.4	0.00	0.00	0.00

END OF HOLE

DRILL DATES Aug 2 - Aug 5 1975

LOCATION LN. 62 W  
 ELEVATION  $\left\{ \begin{array}{l} 4232.03 \text{ ft.} \\ 1289.92 \text{ m} \end{array} \right.$

DIP AT COLLAR  $90^\circ$   
 BEARING  
 DEPTH 602 ft (183.4 m)

$449.8$ $137.1 \text{ m} - 142.0 \text{ m} = 4.9 \text{ m}$	$465.9$ $139.3 \text{ m} - 140.3 \text{ m} = 1 \text{ m}$	$16.1$ $140.3 \text{ m} - 142.0 \text{ m} = 1.7 \text{ m}$
$139.3 \text{ m} - 140.3 \text{ m} = 1 \text{ m}$ Ag 3.44 ogs Pb 10.18% Zn 9.58%	Ag 1.1 ogs Pb 3.29%	Zn 3.58%

2

ASSAY NO	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ozs	Pb %	Zn %
	0.0	143.0	143.0	0.00	0.00	0.00
2579.	143.0	145.0	2.0	1.18	2.85	5.28
	145.0	160.1	15.1	NOT ASSAYED		
2580	160.1	160.9	0.8	2.24	6.38	6.10
2581	160.9	162.1	1.2	0.18	0.15	0.14
2582	162.1	163.8	1.7	0.62	3.00	5.50
	163.8	170.4	6.6	NOT ASSAYED		
2583	170.4	171.9	1.5	2.71	5.70	7.51
	171.9	214.0	42.1	0.00	0.00	0.00

END OF HOLE

LOCATION 4 N. 62 W  
 ELEVATION 4226.62 ft  
 1288.27 m  
 DIP AT COLLAR 90°  
 BEARING  
 DEPTH 702 ft (214 m)

143.0m - 145.0m = 2m Ag 1.18ozs Pb 2.85% Zn 5.28%

160.1m - 163.8m = 3.7m Ag 0.83ozs.  
 Pb 1.71%  
 Zn 3.89%

170.4m - 171.9m = 1.5m Ag 2.71ozs Pb 5.7% Zn 7.51%

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS			
	FROM	TO		Ag <sup>ops</sup>	Pb %	Zn %	
2118	0.0	103.1	103.1	0.00	0.00	0.00	
	103.1	104.7	1.6	1.00	2.00	3.30	
	104.7	105.2	0.5	NOT ASSAYED			
2119	105.2	107.7	2.5	0.88	1.98	3.90	
2120	107.7	109.6	1.9	1.03	2.08	3.84	
	109.6	118.4	8.8	NOT ASSAYED			
2121	118.4	121.6	3.2	1.47	3.23	5.34	
2122	121.6	125.9	4.7	0.77	1.73	3.00	
2123	125.9	128.0	2.1	0.59	1.43	3.00	
2124	128.0	129.5	1.5	0.80	2.30	4.02	
2125	129.5	132.7	3.2	1.09	1.98	4.08	
2126	132.7	133.9	1.2	0.53	1.15	2.28	
2127	133.9	135.8	1.9	1.38	3.75	8.25	14.5 m
2128	135.8	139.0	3.2	1.32	2.48	6.06	Ag 1.39 ops
2129	139.0	142.0	3.0	1.35	3.08	5.16	Pb 3.17%
2130	142.0	145.2	3.2	1.62	3.98	5.16	Zn 6.93%
2131	145.2	148.4	3.2	1.27	3.09	5.56	
2132	148.4	151.2	2.8	0.85	1.83	4.38	
2133	151.2	153.1	1.9	0.18	0.30	1.68	
2134	153.1	156.9	3.8	0.80	1.80	1.81	
2135	156.9	160.3	3.5	0.88	2.23	3.18	
	160.3	161.3	1.0	NOT ASSAYED			
2136	161.3	163.7	2.4	1.18	2.63	2.76	
2137	163.7	166.7	3.0	1.29	3.00	5.04	
2138	166.7	169.1	2.4	0.97	1.89	4.02	
2139	169.1	170.8	1.7	0.71	2.08	1.40	
2140	170.8	173.4	2.6	0.38	0.78	1.46	
	173.4	176.6	3.2	NOT ASSAYED			
2141	176.6	178.8	2.2	0.62	1.48	1.78	
	178.8	180.2	1.4	NOT ASSAYED			
2142	180.2	180.7	0.5	3.03	5.24	10.64	
	180.7	199.6	18.9	NOT ASSAYED			
2143	199.6	202.7	3.1	2.74	5.33	8.43	
2144	202.7	205.7	3.0	1.38	3.15	4.56	
2145	205.7	206.7	1.0	0.80	1.63	4.14	
	206.7	362.2	155.5	NOT ASSAYED			

LOCATION. 8 N. 84 W.

DIP AT COLLAR 90°

ELEVATION

BEARING

DEPTH. 1376 ft (420.3 m).

103.1 - 109.6 = 6.5 m

Ag 0.88 ogs

Pb 1.98%

Zn 3.43%

LOW.

118.4 m - 151.2 m = 32.8 m.

Ag 1.13 ogs.

Pb 2.55%

Zn 4.77%

161.3 m - 169.1 m = 7.8 m

Ag 1.09 ogs

Pb 2.54% Zn 4.02%

LOW.

180.2 - 180.7 = 0.5 m. Ag 3.03 ogs. Pb 5.24%. Zn 10.64%.

199.6 m - 206.7 m = 7.1 m Ag 1.89 ogs.

Pb 3.89%

Zn 6.19%

ASSAY NO	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ops	Pb %	Zn %
2146	362.2	364.8	2.6	0.24	0.38	0.37
2147	364.8	367.2	2.4	0.26	0.34	0.52
2148	367.2	368.0	0.8	0.29	0.34	0.66
2149	368.0	368.7	0.7	1.32	3.30	4.14
	368.7	391.7	23.0	NOT ASSAYED		
2150	391.7	393.3	1.6	2.79	5.19	8.43
2151	393.3	394.8	1.5	0.71	1.35	2.22
	394.8	401.0	6.2	NOT ASSAYED		
2152	401.0	401.6	0.6	2.50	6.30	8.03
2153	401.6	404.6	3.0	0.62	1.48	1.20
2154	404.6	406.1	1.5	2.88	4.58	5.64
	406.1	406.8	0.7	NOT ASSAYED		
2155	406.8	407.5	0.7	2.21	5.40	6.76
2156	407.5	408.2	0.7	0.88	2.03	2.82
	408.2	420.3	12.1	0.00	0.00	0.00

END OF HOLE

368.0m - 368.7m = 0.7m Ag. 1.32 ops. Pb 3.30% Zn 4.14%

391.7 - 394.8 = 3.1m Ag. 1.78 ops Pb 3.33% Zn 5.43%

401.0 - 406.1 = 5.1m Ag 1.58 ops.  
Pb 2.96%  
Zn 3.31%

now

406.8 - 408.2 = 1.4m Ag 1.55 ops.  
Pb 3.72%  
Zn 4.79%

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag ogs	Pb %	Zn %
	0.0	99.6	99.6	0.00	0.00	0.00
2304	99.6	102.2	2.6	1.03	2.92	2.00
2305	102.2	106.7	4.5	0.38	0.52	0.92
2306	106.7	109.9	3.2	0.18	0.19	0.24
	109.9	111.4	1.5	NOT ASSAYED		
2307	111.4	112.9	1.5	0.15	0.22	0.36
2308	112.9	114.8	1.9	2.41	5.97	6.45
2309	114.8	117.3	2.5	0.18	0.19	0.34
2310	117.3	119.8	2.5	0.21	0.27	0.31
2311	119.8	122.8	3.0	0.15	0.12	0.42
2312	122.8	123.7	0.9	0.74	2.23	3.20
2313	123.7	125.0	1.3	0.29	0.23	0.76
	125.0	144.5	19.5	NOT ASSAYED		
2314	144.5	146.0	1.5	1.18	3.00	2.30
	146.0	167.2	21.2	NOT ASSAYED		
2315	167.2	168.4	1.2	1.21	3.45	3.00
2316	168.4	168.9	0.5	1.62	4.88	7.29
2317	168.9	171.3	2.4	0.29	0.27	0.21
2318	171.3	173.5	2.2	0.47	0.68	0.71
2319	173.5	174.3	0.8	1.68	4.58	3.66
2320	174.3	176.9	2.6	1.12	2.93	2.10
	176.9	199.6	22.7	0.00	0.00	0.00

END OF HOLE

LOCATION 45.62W  
ELEVATION.

DIP AT COLLAR 90°  
BEARING.  
DEPTH ~~654.80~~ ft (199.6 m).

112.9 - 114.8 = 1.9m. Ag 2.41ogs Pb 5.97% Zn 6.45%

167.2 - 168.9 = 1.7m. Ag 1.33ogs Pb 3.87% Zn 4.26%

173.5 - 174.3 = 0.8m. Ag 1.68ogs Pb 4.58% Zn 3.66%

ASSAY N°	SECTION (METRES)			ASSAYS		
	FROM	TO	LENGTH (METRES)	Ag o/s	Pb %	Zn %
	0.0	46.8	46.8	0.00	0.00	0.00
2263	46.8	47.6	0.8	3.21	7.80	8.83
2264	47.6	49.2	1.6	5.32	11.94	9.11
2265	49.2	50.3	1.1	TR	0.07	0.10
2266	50.3	50.5	0.2	1.44	6.48	14.49
	50.5	90.3	39.8	NOT ASSAYED		
2267	90.3	91.4	1.1	2.85	6.79	6.37
	91.4	151.3	59.9	NOT ASSAYED		
2268	151.3	153.8	2.5	2.85	5.48	8.28
2269	153.8	154.8	1.0	2.21	5.33	5.50
2270	154.8	157.2	2.4	2.94	7.82	9.00
2271	157.2	159.4	2.2	0.59	1.25	1.66
2272	159.4	161.2	1.8	1.56	4.28	5.28
2273	161.2	164.0	2.8	0.68	1.28	2.22
	164.0	168.5	4.5	NOT ASSAYED		
2274	168.5	171.0	2.5	0.24	0.22	0.51
2275	171.0	174.0	3.0	0.24	0.27	0.55
2276	174.0	176.2	2.2	0.27	0.24	0.27
2277	176.2	178.0	1.8	0.27	0.20	0.22
2278	178.0	181.3	3.3	0.06	0.27	0.35
	181.3	190.5	9.2	0.00	0.00	0.00
	END OF HOLE					

LOCATION 8 N. 68 W  
 ELEVATION 4237 ft  
 1291.44 m  
 DIP AT COLLAR 90°  
 BEARING  
 DEPTH 625 ft (190.5 m)

46.8 - 50.5 m = 3.7 m  
 Ag 3.07 o/s  
 Pb 7.22 %  
 Zn 6.66 %

90.3 - 91.4 = 1.1 m. Ag 2.85 o/s. Pb 6.79 % Zn 6.37 %

151.3 - 161.2 = 9.9 m  
 Ag 2.07 o/s  
 Pb 4.87 %  
 Zn 6.16 %

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag <sup>088</sup>	Pb <sup>70</sup>	Zn <sup>70</sup>
	0.0	52.4	52.4	0.00	0.00	0.00
2584	52.4	54.9	2.5	3.44	7.98	15.22
2585	54.9	55.5	0.6	0.18	0.39	4.50
2586	55.5	56.7	1.2	1.15	2.70	5.80
2587	56.7	58.5	1.8	1.85	4.88	9.27
2588	58.5	61.0	2.5	1.79	4.20	8.82
2589	61.0	62.9	1.9	2.35	6.76	11.70
2590	62.9	65.5	2.6	4.26	9.06	17.05
2591	65.5	67.8	2.3	3.03	7.72	15.26
2592	67.8	69.8	2.0	5.00	11.11	21.65
2593	69.8	71.3	1.5	3.24	6.89	13.66
2594	71.3	73.8	2.5	0.38	0.40	1.20
2595	73.8	76.2	2.4	0.29	0.65	0.90
2596	76.2	79.2	3.0	0.44	0.95	0.93
2597	79.2	82.0	2.8	0.15	0.14	0.35
2598	82.0	84.7	2.7	0.29	0.23	0.31
2599	84.7	87.5	2.8	0.26	0.29	0.84
2600	87.5	90.5	3.0	0.24	0.12	0.42
2439	90.5	93.5	3.0			
2440	93.5	96.6	3.1	0.24	0.13	0.31
2441	96.6	99.1	2.5	0.21	0.04	0.42
2442	99.1	102.4	3.4	0.29	0.12	0.65
2443	102.4	105.2	2.7	0.29	0.13	0.40
2444	105.2	108.2	3.0	0.18	0.07	0.15
2445	108.2	110.6	2.4	0.15	0.05	0.12
2446	110.6	112.2	1.6	0.12	0.04	0.04
2447	112.2	114.9	2.7	0.18	0.28	0.25
2448	114.9	116.4	2.5	0.41	0.52	0.61
2449	116.4	118.0	1.6	0.77	1.63	2.10
2450	118.0	119.5	1.5	0.85	1.58	1.80
2451	119.5	121.0	1.5	1.38	2.93	3.84
2452	121.0	121.5	0.5	0.29	0.27	0.40
2453	121.5	122.2	0.7	4.80	10.61	15.60
2454	122.2	124.0	1.8	1.21	2.85	3.54
	124.0	216.7	92.7	0.00	0.00	0.00

END OF HOLE

LOCATION R.N. 62W

DIP AT CORNER 90°

ELEVATION { 4220.67 ft

BEARING

1286.46 m

DEPTH 711 ft (216.7 m)

52.4 - 71.3 = 18.9 m

Ag 2.92 ozs.

Pb 6.85%

Zn 13.3%

121.5 - 124.0 = 2.5 m Ag 2.22 ozs Pb 5.02%

Zn 6.92%

of

ASSAY

FROM / TO (METERS) LENGTH (METERS) Ag Ags Pb

0.0 69.6 69.6 0.00 0.00 0.00

69.6 70.7 1.1 0.59 1.13 0.69

70.7 74.0 3.3 1.47 4.28 3.06

74.0 75.3 1.3 1.44 4.13 4.10

75.3 76.8 1.5 1.44 4.73 5.00

76.8 78.3 1.5 2.30 6.79 5.80

78.3 79.9 1.6 1.76 3.90 3.80

79.9 80.8 0.9 0.82 0.28 0.43

80.8 82.9 2.1 0.29 0.19 0.20

82.9 84.4 1.5 0.29 0.18 0.54

84.4 85.9 1.5 0.21 0.20 0.38

85.9 87.5 1.6 2.60 5.98 5.16

87.5 89.0 1.5 2.00 4.73 7.60

89.0 92.3 3.3 0.62 1.43 2.64

92.3 93.0 0.7 2.74 6.54 11.41

93.0 95.1 2.1 0.74 1.75 3.18

95.1 96.6 1.5 0.24 0.20 0.60

96.6 99.7 3.1 0.12 0.17 0.60

99.7 101.9 2.2 0.18 0.12 0.59

101.9 104.8 2.9 0.77 1.63 3.06

104.8 107.1 2.3 2.41 5.78 5.88

107.1 136.2 29.1 NOT ASSAYED

136.2 138.6 2.4 0.59 1.00 1.26

138.6 139.3 0.7 2.31 5.38 7.25

140.3 140.3 1.0 0.21 0.18 0.33

140.7 140.7 0.4 2.12 3.90 5.52

143.9 143.9 3.2 0.94 2.15 1.76

147.1 147.1 2.2 0.80 1.83 1.30

148.4 148.4 2.3 0.35 0.68 0.98

151.3 151.3 2.9 0.68 1.53 1.46

153.0 153.0 1.7 1.09 3.00 3.06

156.1 156.1 3.1 0.77 2.00 2.46

159.1 159.1 3.0 0.47 1.13 0.88

162.2 162.2 3.1 0.15 0.12 0.12

163.8 163.8 1.6 0.12 0.09 0.06

164.8 164.8 1.0 0.06 0.08 0.02

166.2 166.2 1.4 0.59 0.90 0.65

167.2 167.2 0.00 0.00 0.00 0.00

169.6 169.6 1.1 0.59 1.13 0.69

174.0 174.0 3.3 1.47 4.28 3.06

175.3 175.3 1.3 1.44 4.13 4.10

176.8 176.8 1.5 1.44 4.73 5.00

178.3 179.9 1.6 1.76 3.90 3.80

180.8 182.9 2.1 0.29 0.19 0.20

182.9 184.4 1.5 0.29 0.18 0.54

184.4 185.9 1.5 0.21 0.20 0.38

185.9 187.5 1.6 2.60 5.98 5.16

187.5 189.0 1.5 2.00 4.73 7.60

189.0 192.3 3.3 0.62 1.43 2.64

192.3 193.0 0.7 2.74 6.54 11.41

193.0 195.1 2.1 0.74 1.75 3.18

195.1 196.6 1.5 0.24 0.20 0.60

196.6 199.7 3.1 0.12 0.17 0.60

199.7 201.9 2.2 0.18 0.12 0.59

201.9 204.8 2.9 0.77 1.63 3.06

204.8 207.1 2.3 2.41 5.78 5.88

207.1 236.2 29.1 NOT ASSAYED

236.2 238.6 2.4 0.59 1.00 1.26

238.6 239.3 0.7 2.31 5.38 7.25

240.3 240.3 1.0 0.21 0.18 0.33

240.7 240.7 0.4 2.12 3.90 5.52

243.9 243.9 3.2 0.94 2.15 1.76

247.1 247.1 2.2 0.80 1.83 1.30

248.4 248.4 2.3 0.35 0.68 0.98

251.3 251.3 2.9 0.68 1.53 1.46

253.0 253.0 1.7 1.09 3.00 3.06

256.1 256.1 3.1 0.77 2.00 2.46

259.1 259.1 3.0 0.47 1.13 0.88

262.2 262.2 3.1 0.15 0.12 0.12

263.8 263.8 1.6 0.12 0.09 0.06

264.8 264.8 1.0 0.06 0.08 0.02

266.2 266.2 1.4 0.59 0.90 0.65

267.2 267.2 0.00 0.00 0.00 0.00

269.6 269.6 1.1 0.59 1.13 0.69

274.0 274.0 3.3 1.47 4.28 3.06

275.3 275.3 1.3 1.44 4.13 4.10

276.8 276.8 1.5 1.44 4.73 5.00

278.3 279.9 1.6 1.76 3.90 3.80

280.8 282.9 2.1 0.29 0.19 0.20

282.9 284.4 1.5 0.29 0.18 0.54

284.4 285.9 1.5 0.21 0.20 0.38

285.9 287.5 1.6 2.60 5.98 5.16

287.5 289.0 1.5 2.00 4.73 7.60

289.0 292.3 3.3 0.62 1.43 2.64

292.3 293.0 0.7 2.74 6.54 11.41

293.0 295.1 2.1 0.74 1.75 3.18

295.1 296.6 1.5 0.24 0.20 0.60

296.6 299.7 3.1 0.12 0.17 0.60

299.7 301.9 2.2 0.18 0.12 0.59

301.9 304.8 2.9 0.77 1.63 3.06

304.8 307.1 2.3 2.41 5.78 5.88

307.1 336.2 29.1 NOT ASSAYED

336.2 338.6 2.4 0.59 1.00 1.26

338.6 339.3 0.7 2.31 5.38 7.25

340.3 340.3 1.0 0.21 0.18 0.33

340.7 340.7 0.4 2.12 3.90 5.52

343.9 343.9 3.2 0.94 2.15 1.76

347.1 347.1 2.2 0.80 1.83 1.30

348.4 348.4 2.3 0.35 0.68 0.98

351.3 351.3 2.9 0.68 1.53 1.46

353.0 353.0 1.7 1.09 3.00 3.06

356.1 356.1 3.1 0.77 2.00 2.46

359.1 359.1 3.0 0.47 1.13 0.88

362.2 362.2 3.1 0.15 0.12 0.12

363.8 363.8 1.6 0.12 0.09 0.06

364.8 364.8 1.0 0.06 0.08 0.02

366.2 366.2 1.4 0.59 0.90 0.65

367.2 367.2 0.00 0.00 0.00 0.00

369.6 369.6 1.1 0.59 1.13 0.69

374.0 374.0 3.3 1.47 4.28 3.06

375.3 375.3 1.3 1.44 4.13 4.10

376.8 376.8 1.5 1.44 4.73 5.00

378.3 379.9 1.6 1.76 3.90 3.80

380.8 382.9 2.1 0.29 0.19 0.20

382.9 384.4 1.5 0.29 0.18 0.54

384.4 385.9 1.5 0.21 0.20 0.38

385.9 387.5 1.6 2.60 5.98 5.16

387.5 389.0 1.5 2.00 4.73 7.60

389.0 392.3 3.3 0.62 1.43 2.64

392.3 393.0 0.7 2.74 6.54 11.41

393.0 395.1 2.1 0.74 1.75 3.18

395.1 396.6 1.5 0.24 0.20 0.60

396.6 399.7 3.1 0.12 0.17 0.60

399.7 401.9 2.2 0.18 0.12 0.59

401.9 404.8 2.9 0.77 1.63 3.06

404.8 407.1 2.3 2.41 5.78 5.88

407.1 436.2 29.1 NOT ASSAYED

436.2 438.6 2.4 0.59 1.00 1.26

438.6 439.3 0.7 2.31 5.38 7.25

440.3 440.3 1.0 0.21 0.18 0.33

440.7 440.7 0.4 2.12 3.90 5.52

443.9 443.9 3.2 0.94 2.15 1.76

447.1 447.1 2.2 0.80 1.83 1.30

448.4 448.4 2.3 0.35 0.68 0.98

451.3 451.3 2.9 0.68 1.53 1.46

453.0 453.0 1.7 1.09 3.00 3.06

456.1 456.1 3.1 0.77 2.00 2.46

459.1 459.1 3.0 0.47 1.13 0.88

462.2 462.2 3.1 0.15 0.12 0.12

463.8 463.8 1.6 0.12 0.09 0.06

464.8 464.8 1.0 0.06 0.08 0.02

466.2 466.2 1.4 0.59 0.90 0.65

467.2 467.2 0.00 0.00 0.00 0.00

469.6 469.6 1.1 0.59 1.13 0.69

474.0 474.0 3.3 1.47 4.28 3.06

475.3 475.3 1.3 1.44 4.13 4.10

476.8 476.8 1.5 1.44 4.73 5.00

478.3 479.9 1.6 1.76 3.90 3.80

480.8 482.9 2.1 0.29 0.19 0.20

482.9 484.4 1.5 0.29 0.18 0.54

484.4 485.9 1.5 0.21 0.20 0.38

485.9 487.5 1.6 2.60 5.98 5.16

487.5 489.0 1.5 2.00 4.73 7.60

489.0 492.3 3.3 0.62 1.43 2.64

492.3 493.0 0.7 2.74 6.54 11.41

493.0 495.1 2.1 0.74 1.75 3.18

495.1 496.6 1.5 0.24 0.20 0.60

496.6 499.7 3.1 0.12 0.17 0.60

499.7 501.9 2.2 0.18 0.12 0.59

501.9 504.8 2.9 0.77 1.63 3.06

504.8 507.1 2.3 2.41 5.78 5.88

507.1 536.2 29.1 NOT ASSAYED

536.2 538.6 2.4 0.59 1.00 1.26

538.6 539.3 0.7 2.31 5.38 7.25

540.3 540.3 1.0 0.21 0.18 0.33

540.7 540.7 0.4 2.12 3.90 5.52

543.9 543.9 3.2 0.94 2.15 1.76

547.1 547.1 2.2 0.80 1.83 1.30

548.4 548.4 2.3 0.35 0.68 0.98

551.3 551.3 2.9 0.68 1.53 1.46

553.0 553.0 1.7 1.09 3.00 3.06

556.1 556.1 3.1 0.77 2.00 2.46

559.1 559.1 3.0 0.47 1.13 0.88

562.2 562.2 3.1 0.15 0.12 0.12

563.8 563.8 1.6 0.12 0.09 0.06

564.8 564.8 1.0 0.06 0.08 0.02

566.2 566.2 1.4 0.59 0.90 0.65

567.2 567.2 0.00 0.00 0.00 0.00

569.6 569.6 1.1 0.59 1.13 0.69

574.0 574.0 3.3 1.47 4.28 3.06

575.3 575.3 1.3 1.44 4.13 4.10

576.8 576.8 1.5 1.44 4.73 5.00

578.3 579.9 1.6 1.76 3.90 3.80

580.8 582.9 2.1 0.29 0.19 0.20

582.9 584.4 1.5 0.29 0.18 0.54

584.4 585.9 1.5 0.21 0.20 0.38

585.9 587.5 1.6 2.60 5.98 5.16

587.5 589.0 1.5 2.00 4.73 7.60

589.0 592.3 3.3 0.62 1.43 2.64

ASSAY No	SECTION (METRES)		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag <i>ags</i>	Pb <i>%</i>	Zn <i>%</i>
	0.0	129.1	129.1	0.00	0.00	0.00
2279	129.1	131.1	2.0	1.32	2.85	3.84
2280	131.1	132.1	1.0	1.03	2.23	4.02
2281	132.1	134.0	1.9	0.15	0.27	0.45
2282	134.0	135.7	1.7	1.35	2.93	4.14
2283	135.7	137.0	1.3	2.71	6.90	10.98
2284	137.0	139.0	2.0	3.06	7.05	10.80
2285	139.0	141.0	2.0	2.41	5.33	8.10
2286	141.0	143.0	2.0	2.24	5.03	6.84
2287	143.0	145.0	2.0	1.68	3.23	4.80
2288	145.0	147.0	2.0	2.35	5.55	7.24
2289	147.0	149.6	2.0	4.44	15.02	10.1
	149.6	149.6	41.2	0.00	0.00	0.00

END OF HOLE

LOCATION: 8N. 66W.  
 ELEVATION: 4265.41 ft  
 (1300.09 m)  
 DIP AT COLLAR: 90°  
 BEARING:  
 DEPTH: 626 ft (190.80 m).

129.1 - 149.6 = 20.5 m.	Ag 2.05 <i>ags</i> .
134.0 - 149.6 = 15.6 m	Pb 5.11 <i>%</i>
Ag 2.45 <i>ags</i> .	Zn 6.32 <i>%</i>
Pb 6.18 <i>%</i>	
Zn 7.50 <i>%</i>	

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag. ogs.	Pb %	Zn %
	0.0	41.4	41.4	0.00	0.00	0.00
2455	41.4	44.0	2.6	0.32	0.69	0.68
2456	44.0	46.0	2.0	0.59	1.63	1.30
2457	46.0	48.0	2.0	0.94	2.85	2.88
2458	48.0	49.3	1.3	1.03	2.85	2.52
2459	49.3	51.2	1.9	0.94	1.58	1.60
	51.2	58.5	7.3	NOT ASSAYED		
2460	58.5	60.5	2.0	1.47	4.05	5.90
2461	60.5	62.5	2.0	1.50	3.60	4.86
2462	62.5	63.5	1.0	1.21	2.93	3.54
2463	63.5	64.8	1.3	1.79	5.04	9.73
2464	64.8	66.0	1.2	1.88	4.73	7.04
	66.0	166.7	100.7	NOT ASSAYED		
2465	166.7	167.6	0.9	0.77	1.58	2.00
2466	167.6	168.8	1.2	0.80	2.03	1.90
2467	168.8	170.9	2.1	0.50	1.00	1.20
	170.9	175.0	4.1	NOT ASSAYED		
2468	175.0	176.2	1.2	0.15	0.12	0.09
	176.2	198.1	21.9	0.00	0.00	0.00

END OF HOLE

LOCATION 2 s. 60 w.  
ELEVATION.

DIP AT CORNER. 90°  
BEARING.  
DEPTH. 650 ft (198.1 m).

58.5 - 66.0 = 7.5 m.

Ag 1.56 ogs.

Pb 4.06%

Zn 6.15%

70

D.D.H. A 111

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag. ogs	Pb %	Zn %
2157	0.0	185.1	185.1	0.00	0.00	0.00
	185.1	185.8	0.7	0.94	2.18	1.84
	185.8	187.6	1.8	NOT ASSAYED		
2158	187.6	190.0	2.4	0.47	1.20	1.28
	190.0	234.5	44.5	NOT ASSAYED		
2159	234.5	235.5	1.0	3.18	6.69	15.37
2160	235.5	236.8	1.3	2.79	5.75	17.82
	236.8	237.9	1.1	NOT ASSAYED		
2161	237.9	239.9	2.0	2.35	3.98	8.01
2162	239.9	242.0	2.1	1.00	1.44	2.46
2163	242.0	244.0	2.0	0.83	1.60	2.22
2164	244.0	246.0	2.0	0.59	1.08	1.76
2165	246.0	248.0	2.0	0.35	0.62	0.94
2166	248.0	250.0	2.0	0.24	0.48	0.74
2167	250.0	251.4	1.4	1.03	2.03	4.02
	251.4	252.0	0.6	NOT ASSAYED		
2168	252.0	254.0	2.0	0.97	2.20	3.72
2169	254.0	256.0	2.0	1.06	2.28	3.60
2170	256.0	258.5	2.5	1.03	2.55	4.14
	258.5	271.9	13.4	NOT ASSAYED		
2171	271.9	273.9	2.0	0.56	0.80	1.46
2172	273.9	275.4	1.5	0.26	0.85	1.14
2173	275.4	276.2	0.8	0.35	1.03	1.72
	276.2	277.8	1.6	NOT ASSAYED		
2174	277.8	279.8	2.0	0.44	1.00	1.10
2175	279.8	281.0	1.2	0.41	0.78	0.96
2176	281.0	282.1	1.1	0.38	0.88	1.12
	282.1	285.3	3.2	NOT ASSAYED		
2177	285.3	287.0	1.7	1.76	4.73	8.37
2178	287.0	288.7	1.7	1.50	4.43	3.78
2179	288.7	290.6	1.9	2.03	5.55	7.38
2180	290.6	291.8	1.2	1.62	4.20	6.88
2181	291.8	293.1	1.3	2.94	6.08	8.36
	293.1	303.0	9.9	NOT ASSAYED		
2182	303.0	305.0	2.0	4.29	7.05	11.84
2183	305.0	307.0	2.0	3.71	8.10	14.17
2184	307.0	309.0	2.0	5.44	11.25	18.02
2185	309.0	312.0	3.0	2.79	5.85	9.67
2186	312.0	314.0	2.0	3.18	6.90	10.53
2187	314.0	315.3	1.3	5.74	12.33	19.11

LOCATION 2 N. 86 W

DIP AT COLLAR 90°

ELEVATION 1320.55 m

BEARING

4352.2 ft.

DEPTH 1293.3 ft (394.2 m)

234.5 - 239.9 = 5.4 m.

Ag 3.37 ogs.

Pb 4.10%

Zn 10.10%

250.0 - 258.5 = 8.5 m.

Ag 0.95 ogs.

Pb 2.14%

Zn 3.18%

LOW.

NOTE.

285.3 - 293.1 = 7.8 m.

Ag 1.94 ogs.

Pb 5.00%

Zn 6.90%

285.3 - 293.1 = 30.0 m.

Ag 2.13 ogs.

Pb 4.64%

Zn 7.03%

DDH. A III.

Continued at foot  
of Pages 72 & 73  
overleaf.

303.0 - 315.3 = 12.3 m.

Ag 3.98 ogs

Pb 8.14%

Zn 12.76%

ASSAY No	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag. ozs	Pb %	Zn %
	0.0	110.4	110.4	0.00	0.00	0.00
2290	110.4	111.6	1.2	4.74	11.57	16.18
2291	111.6	113.1	1.5	3.97	9.15	10.64
2292	113.1	115.2	2.1	3.00	6.75	9.16
2293	115.2	117.7	2.5	3.03	7.05	9.17
2294	117.7	120.2	2.5	0.80	1.95	3.66
2295	120.2	121.3	1.1	1.03	2.48	1.74
2296	121.3	121.9	0.6	2.47	5.81	5.48
2297	121.9	124.0	2.1	0.80	1.43	2.46
2298	124.0	127.4	3.4	0.77	1.45	1.62
2299	127.4	128.0	0.6	3.59	8.27	16.42
2300	128.0	130.8	2.8	0.71	1.48	1.80
	130.8	140.9	10.1	NOT ASSAYED		
2601.	140.9	141.9	1.0	0.41	0.98	2.52
	141.9	172.5	30.6	0.00	0.00	0.00

END OF HOLE

LOCATION 8 N. 64 W.  
ELEVATION 4257.91 ft  
1297.8 m.

DIP AT CORNER. 90°  
BEARING  
DEPTH 566 ft. 172.5 m

110.4 - 128.0 = 17.6 m

Ag 2.08 ozs.

Pb 5.41%

Zn 6.39%

DDH A 111 (Continued)

	315.3	369.3	54.0	NOT ASSAYED		
2188	369.3	370.8	1.5	2.59	5.85	8.94
2189	370.8	372.2	1.4	0.91	2.93	3.18
2190	372.2	374.0	1.8	0.83	1.48	2.40
	374.0	394.2	20.2	0.00	0.00	0.00

END OF HOLE

369.3 - 374.0 = 4.7 m. Ag 0.82 ozs

Pb 3.30%

Zn 4.72%

ll

ASSAY No	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag ozs	Pb %	Zn %
	0.0	215.4	215.4	0.00	0.00	0.00
2901	215.4	216.4	1.0	2.56	5.35	12.57
2902	216.4	217.7	1.3	2.38	5.03	8.32
	217.7	225.7	8.0	NOT ASSAYED		
2903	225.7	226.6	0.9	2.21	5.26	7.98
	226.6	227.4	0.8	NOT ASSAYED		
2904	227.4	228.0	0.6	1.18	2.63	5.88
	228.0	316.0	88.0	NOT ASSAYED		
2905	316.0	316.8	0.8	1.03	2.38	4.50
2906	316.8	317.6	0.8	1.47	3.60	6.28
2907	317.6	318.6	1.0	1.15	2.40	2.94
	318.6	365.3	46.7	NOT ASSAYED		
2908	365.3	366.2	0.9	0.29	0.50	1.22
2909	366.2	367.2	1.0	1.06	2.15	4.20
2910	367.2	368.2	1.0	2.53	5.40	8.71
2911	368.2	369.2	1.0	1.73	3.45	6.12
2912	369.2	370.2	1.0	2.41	4.73	8.10
2913	370.2	370.8	0.6	3.24	6.08	9.73
2914	370.8	371.8	1.0	0.26	0.73	1.34
2915	371.8	372.8	1.0	0.65	1.63	2.52
2916	372.8	373.5	0.7	0.35	0.83	1.58
2917	373.5	374.5	1.0	2.47	5.83	6.89
2918	374.5	375.5	1.0	2.82	6.15	10.35
2919	375.5	376.7	1.2	1.21	2.85	5.64
2920	376.7	377.5	0.8	2.30	4.58	8.09
2921	377.5	377.9	0.4	0.44	0.96	0.66
2922	377.9	378.9	1.0	1.24	2.13	3.30
2923	378.9	379.8	0.9	1.15	2.70	3.30
2924	379.8	380.2	0.4	0.38	0.85	0.86
	380.2	474.6	94.4	0.00	0.00	0.00

LOCATION: 4 N. 86 W

DIP AT COLLAR 90°

ELEVATION: 1326.56 m.  
4352.23 ft.

BEARING  
DEPTH 1557 ft (474.6 m)

215.4 - 217.7 = 2.3 m. Ag. 2.46 ozs  
Pb. 5.17% Zn 10.17%

225.7 - 228.0 = 2.3 m. Ag 1.17 ozs  
Pb 2.74%  
Zn 4.66%

316.0 - 318.6 = 2.6 m Ag 1.21 ozs.  
Pb 2.76%  
Zn 4.45%

366.2 - 370.8 = 4.6 m

Ag 1.64 ozs  
Pb 4.21%  
Zn 7.17%

366.2 - 379.8 = 13.6 m

Ag 1.34 ozs.  
Pb 3.37%  
Zn 5.51%

373.5 - 379.8 = 6.3 m

Ag 1.75 ozs  
Pb 3.73%  
Zn 5.88%

ASSAY NO	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
	0.0	93.2	93.2	0.00	0.00	0.00
2356	93.2	95.2	2.0	0.53	0.68	0.30
2357	95.2	97.1	2.5	0.56	1.20	0.94
	97.7	98.7	1.0	NOT ASSAYED		
2358	98.7	100.7	2.0	0.71	1.43	1.16
2359	100.7	102.7	2.0	0.71	1.45	1.56
2360	102.7	104.7	2.0	0.59	1.15	0.30
2361	104.7	106.7	2.0	0.80	0.98	0.43
2362	106.7	108.5	1.8	0.59	1.15	0.95
	108.5	112.6	4.1	NOT ASSAYED		
2363	112.6	114.6	2.0	0.74	1.58	1.36
2364	114.6	116.6	2.0	0.53	1.23	0.98
2365	116.6	118.6	2.0	0.56	1.02	0.77
2366	118.6	120.6	2.0	0.74	1.75	1.40
2367	120.6	122.6	2.0	0.74	1.63	1.12
2368	122.6	124.6	2.0	0.71	1.63	1.34
	124.6	127.0	2.4	NOT ASSAYED		
2369	127.0	129.0	2.0	0.68	1.04	0.68
2370	129.0	131.0	2.0	0.71	1.24	0.80
2371	131.0	133.0	2.0	0.71	1.18	0.66
2372	133.0	135.0	2.0	1.24	2.30	2.34
2373	135.0	137.0	2.0	1.27	3.08	3.36
2374	137.0	137.9	0.9	0.29	0.74	0.82
	137.9	138.8	0.9	NOT ASSAYED		
2375	138.8	140.5	1.7	0.56	1.30	1.12
2376	140.5	141.9	1.4	1.18	4.05	4.14
2377	141.9	143.9	2.0	0.53	0.80	1.30
2378	143.9	145.4	1.5	0.26	0.15	0.25
2379	145.4	147.4	2.0	1.03	2.08	2.46
2380	147.4	149.7	2.3	0.65	1.10	0.66
	149.7	221.6	71.9	0.00	0.00	0.00

END OF HOLE

LOCATION  
ELEVATION } 4353.28 ft  
1326.88 m

DIP AT COLLAR  
BEARING  
DEPTH 727 ft. (221.6 m)

133.0 - 137.0 = 4.0 m. Ag. 1.26% Pb 2.69% Zn 2.85% Low.

140.5 - 141.9 = 1.4 m. Ag. 1.18% Pb 4.05% Zn 4.14%

ASSAY. No.	SECTION (M)		CORE LENGTH	ASSAYS		
	FROM	TO		Ag. <sup>avg</sup>	Pb %	Zn %
	0.0	221.2	221.2	0.60	0.00	0.00
2602	221.2	222.2	1.0	1.00	2.08	1.50
2603	222.2	224.0	1.8	0.47	0.95	0.58
2604	224.0	225.8	1.8	1.65	3.90	4.38
	225.8	325.9	100.1	NOT ASSAYED		
2605	325.9	327.4	1.5	0.12	0.23	0.30
2606	327.4	329.0	1.6	0.65	1.63	1.34
2607	329.0	330.9	1.9	0.29	0.63	0.42
2608	330.9	331.9	1.0	0.65	1.35	0.82
2609	331.9	332.65	0.75	0.29	0.33	0.38
2610	332.65	333.45	0.8	2.00	4.35	5.04
2611	333.45	334.5	1.05	0.56	0.93	1.08
2612	334.5	336.2	1.7	0.29	0.33	0.40
2613	336.2	337.7	1.5	0.68	1.48	1.98
2614	337.7	339.2	1.3	0.32	0.55	0.30
2615	339.2	340.7	1.5	0.06	0.08	0.18
2616	340.7	342.0	1.3	0.12	0.18	0.18
2617	342.0	343.4	1.4	0.24	0.43	0.24
2618	343.4	344.7	1.3	0.24	0.25	0.10
2619	344.7	346.0	1.3	0.15	0.20	0.06
2620	346.0	347.5	1.5	0.21	0.43	0.26
2621	347.5	349.0	1.5	0.24	0.35	0.24
2622	349.0	349.8	0.8	0.29	0.60	0.46
2623	349.8	350.5	0.7	1.76	4.13	4.26
2624	350.5	351.8	1.3	0.38	0.48	0.92
2625	351.8	353.3	1.5	0.06	0.20	0.16
2626	353.3	354.8	1.5	0.24	0.45	0.50
2627	354.8	356.2	1.4	1.47	4.28	5.52
2628	356.2	357.9	1.7	0.65	1.60	2.76
	357.9	360.5	2.6	NOT ASSAYED		
2629	360.5	361.3	0.8	0.94	2.23	4.48
	361.3	408.4	47.1	NOT ASSAYED		
2630	408.4	410.2	1.8	0.59	1.40	2.34
	410.2	412.5	2.3	NOT ASSAYED		
2631	412.5	413.4	0.9	0.88	3.38	0.52
	413.4	419.9	6.5	NOT ASSAYED		

NOTE

CONTINUED AT FOOT OF  
PAGES 80 & 81

LOCATION Baseline, 86W.

DIP AT COLLAR 90°

ELEVATION 4353.28 ft.

BEARING:

1926.88 m

DEPTH 1470 ft (448.1 m)

224-225.8 = 1.8m. Ag 1.65% Pb 3.90%  
Zn 4.38%

332.65-333.45 = 0.8m. Ag 2.00% Pb 4.35%  
Zn 5.04%

349.8-350.5 = 0.7m. Ag 1.76% Pb 4.13%  
Zn 4.26%

354.8-357.9 = 3.1m. Ag 1.02% Pb 2.81%  
Zn 4.00%

360.5-361.3 = 0.8m. Ag 0.94% Pb 2.25%  
Zn 4.68%

ASSAY N <sup>o</sup>	SECTION		CORE LENGTH(M)	ASSAYS		
	FROM	TO		Ag ozs	Pb%	Zn %
	0.0	110.9	110.9	0.00	0.00	0.00
2469	110.9	111.9	1.0	0.80	1.63	2.94
2470	111.9	114.2	2.3	0.65	1.63	2.82
	114.2	181.7	67.5	0.00	0.00	0.00

END OF HOLE

LOCATION 10 N 66 W  
 ELEVATION  
 DIP AT COLLAR. 90°  
 BEARING  
 DEPTH (181.7 m)

DDH A115 (CONTINUED)

2632	419.9	420.9	1.0	1.03	3.23	4.50
2633	420.9	421.9	1.0	0.88	1.75	1.90
2634	421.9	422.8	0.9	1.85	5.78	8.31
2635	422.8	423.8	1.0	1.82	5.48	7.07
2636	423.8	424.8	1.0	1.00	3.68	6.94
2637	424.8	425.8	1.0	1.24	3.23	5.28
2638	425.8	426.8	1.0	0.15	0.25	2.46
2639	426.8	427.8	1.0	1.06	1.98	2.46
2640	427.8	428.8	1.0	0.44	0.70	0.52
2641	428.8	430.4	1.6	0.35	0.83	0.94
2642	430.4	431.2	0.8	0.41	0.45	0.48
2643	431.2	432.1	0.9	0.59	1.08	1.06
2644	432.1	433.2	1.1	0.56	1.43	1.28
	433.2	448.1	14.9	0.00	0.00	0.00

END OF HOLE

419.9 - 425.8 = 5.9 m  
 Ag 1.29 ozs.  
 Pb 3.83%  
 Zn 5.62%

ASSAY No	SECTION		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag <i>ags</i>	Pb %	Zn %
	0.0	80.8	80.8	0.00	0.00	0.00
2925	80.8	81.2	0.4	2.85	6.08	11.95
2926	81.2	81.7	0.5	7.00	14.62	25.08
2927	81.7	82.3	0.6	4.71	10.27	13.77
2928	82.3	83.3	1.0	6.82	13.13	24.65
2929	83.3	83.9	0.6	5.91	11.21	23.13
2930	83.9	85.2	1.3	4.80	8.22	18.67
2931	85.2	86.0	0.8	6.18	11.65	23.40
2932	86.0	87.0	1.0	3.30	7.65	11.52
2933	87.0	88.0	1.0	1.76	4.43	5.76
2934	88.0	89.0	1.0	2.71	5.85	13.68
2935	89.0	89.6	0.6	3.06	6.39	9.89.
	89.6	97.1	7.5	NOT ASSAYED		
2936	97.1	98.1	1.0	2.91	5.33	8.89.
	98.1	99.3	1.2	NOT ASSAYED		
2937	99.3	100.3	1.0	2.94	5.88	8.82
2938	100.3	101.3	1.0	1.71	3.90	6.77
2939	101.3	102.3	1.0	3.21	5.63	8.15
2940	102.3	103.3	1.0	2.44	5.03	6.48
	103.3	150.3	47.0	NOT ASSAYED		
2941	150.3	151.1	0.8	2.38	5.78	5.40.
	151.1	151.4	0.3	NOT ASSAYED		
2942	151.4	152.4	1.0	2.47	6.05	10.21
2943	152.4	153.4	1.0	0.68	0.70	1.42
2944	153.4	154.4	1.0	1.12	1.28	1.50
2945	154.4	155.1	0.7	0.80	1.50	1.30
2946	155.1	156.1	1.0	1.41	3.68	3.30
2947	156.1	157.9	1.8	3.56	9.21	12.52.
	157.9	212.3	54.4	0.00	0.00	0.00

END OF HOLE

LOCATION Base line. b6w  
 ELEVATION. DIP AT COLLAR. 90°  
 BEARING  
 DEPTH 703 ft (212.3 m).

80.8 - 89.6 = 8.8 m.

Ag 4.39 *ags*  
 Pb 6.81%  
 Zn 16.36%

80.8 - 103.3 = 22.5 m.

Ag 2.3 *ags*.  
 Pb 4.59%  
 Zn 8.14%

150.3 - 157.9 = 7.6 m

Ag 2.16 *ags*.  
 Pb 4.47%  
 Zn 5.82%

ASSAY No	SECTION		LENGTH (METRES)	ASSAYS		
	FROM	TO		Ag. <del>ox</del>	Pb %	Zn %
	0.0	162.0	162.0	0.00	0.00	0.00
2645	162.0	164.0	2.0	1.09	2.43	3.48
	164.0	164.4	0.4	NOT ASSAYED		
2646	164.4	165.0	0.6	0.88	1.78	2.52
	165.0	203.0	38.0	NOT ASSAYED		
2647	203.0	204.0	1.0	0.88	1.75	3.06
2648	204.0	205.0	1.0	1.09	3.23	4.92
2649	205.0	206.0	1.0	1.00	2.85	4.80
2650	206.0	207.0	1.0	0.59	1.70	2.10
2651	207.0	208.0	1.0	0.62	1.65	4.20
2652	208.0	209.0	1.0	0.88	2.70	3.30
2653	209.0	210.0	1.0	0.83	2.28	2.52
2654	210.0	211.0	1.0	0.59	1.68	1.94
2655	211.0	212.0	1.0	0.68	1.70	1.08
2656	212.0	213.0	1.0	0.82	0.93	0.86
2657	213.0	214.0	1.0	0.29	0.63	0.68
2658	214.0	215.0	1.0	0.85	2.10	0.94
2659	215.0	216.9	1.9	0.24	0.30	0.32
2660	216.9	217.5	0.6	2.21	5.33	6.93
2661	217.5	218.5	1.0	1.68	3.98	6.60
2662	218.5	220.0	1.5	0.80	1.65	4.14
	220.0	226.0	6.0	NOT ASSAYED		
2663	226.0	226.8	0.8	1.53	3.68	4.33
2664	226.8	227.8	1.0	0.29	0.58	0.58
2665	227.8	228.8	1.0	1.38	3.75	2.88
2666	228.8	229.8	1.0	2.21	5.39	4.92
2667	229.8	230.3	0.5	0.77	1.48	1.98
2668	230.3	231.3	1.0	2.85	6.16	10.58
2669	231.3	232.3	1.0	2.94	7.11	10.86
2670	232.3	233.3	1.0	2.65	5.57	10.76
2671	233.3	234.3	1.0	1.76	3.98	7.52
2672	234.3	235.3	1.0	0.80	1.83	3.72
	235.3	240.5	5.2	NOT ASSAYED		
2673	240.5	241.7	1.2	0.71	1.48	1.90
2674	241.7	243.4	1.7	1.00	2.18	3.96
2675	243.4	245.4	2.0	0.59	0.73	0.94
2676	245.4	247.4	2.0	0.68	0.63	0.84
2677	247.4	248.7	1.3	0.56	0.88	1.30
	248.7	251.5	2.8	NOT ASSAYED		

1514  
CONTINUED ON PAGES 86 & 87.

LOCATION      6N 86W                      DIP AT COLLAR      90°  
 ELEVATION:                              BEARING  
     DEPTH      1537 ft. (468.5 m)

204.0 - 206.0 = 2.0 m.      Ag 1.05 ogs      Pb 3.04%  
     Zn 4.86%

<sup>666.0    649</sup>  
203 - 210 = 7.0 m.

Ag 0.84 ogs.  
 Pb 2.31%  
 Zn 3.5%

low.

116.6    116.9 = 5.3'  
216.9 - 218.5 = 1.6 m      Ag 1.88 ogs      Pb 4.49%  
     Zn 6.72%

216.9 - 220.0 = 3.1 m      Ag 1.36 ogs.  
     Pb 3.11%  
     Zn 5.47%

714.1 - 712 = 27.9'  
226.8 - 235.3 = 8.5 m

Ag 1.94 ogs.  
 Pb 4.48%  
 Zn 6.62%

ASSAY N°	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag ozs	Pb %	Zn %
2678	251.5	252.1	0.6	0.74	1.43	2.64
	252.1	290.2	38.1	NOT ASSAYED		
2679	290.2	290.5	0.3	2.50	5.76	10.07
2680	290.5	291.5	1.0	2.00	5.75	3.00
2681	291.5	292.5	1.0	1.29	3.00	4.00
	292.5	355.5	63.0	NOT ASSAYED		
2682	355.5	356.5	1.0	0.38	0.73	0.80
2683	356.5	357.2	0.7	1.62	3.60	3.90
2684	357.2	358.9	1.7	1.03	2.28	2.46
2685	358.9	359.7	0.8	0.74	2.03	4.26
2686	359.7	360.6	0.9	0.83	1.88	3.30
	360.6	369.4	8.8	NOT ASSAYED		
2687	369.4	370.9	1.5	2.47	5.03	7.63
	370.9	372.8	1.9	NOT ASSAYED		
2688	372.8	374.3	1.5	1.59	3.90	4.68
2689	374.3	375.7	1.4	0.38	0.15	0.26
2690	375.7	377.0	1.3	0.83	1.38	2.52
2691	377.0	377.6	0.6	2.18	5.70	8.83
2692	377.6	379.2	1.6	1.21	2.88	2.34
2693	379.2	380.7	1.5	1.59	3.68	5.82
2694	380.7	381.9	1.2	2.06	4.43	8.38
	381.9	417.7	35.8	NOT ASSAYED		
2695	417.7	418.8	1.1	1.68	4.35	4.98
	418.8	420.6	1.8	NOT ASSAYED		
2696	420.6	421.6	1.0	0.62	1.35	1.92
2697	421.6	422.6	1.0	0.83	1.78	1.26
2698	422.6	423.6	1.0	0.83	1.83	2.10
2699	423.6	424.6	1.0	0.41	0.83	0.40
2700	424.6	427.6	3.0	0.29	0.70	0.60
	427.6	468.5	40.9	0.00	0.00	0.00

END OF HOLE

$952.1 - 959.6 = 7.5'$   
 $290.2 - 292.5 = 2.3m$ . Ag 1.76 ozs  
 Pb 4.56%  
 Zn 4.36%

$1169.6 - 1171.9 = 2.3$   
 $356.5 - 357.2 = 0.7m$ . Ag 1.62 ozs Pb 3.60%  
 Zn 3.90%

$1211.9 - 1228.0 = 16.1$   
 $369.4 - 374.3 = 4.9m$ . Ag 1.24 ozs.  
 Pb 2.13%  
 Zn 3.17%

$1236.9 - 1252.9 = 16.0'$   
 $377.0 - 381.9 = 4.9m$   
 Ag 1.65 ozs  
 Pb 3.05%  
 Zn 5.68%

$1370.4 - 1374.0 = 3.6$   
 $417.7 - 418.8 = 1.1m$ . Ag 1.68 ozs  
 Pb 4.35% Zn 4.98%

pl

ASSAY N°	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag <i>og</i>	Pb %	Zn %
	00.0	49.0	49.0	0.00	0.00	0.00
2381	49.0	51.2	2.2	1.27	2.43	6.56
2382	51.2	52.3	1.1	1.09	1.78	4.98
2383	52.3	52.9	0.6	1.62	3.83	7.41
	52.9	172.8	119.9	0.00	0.00	0.00



END OF HOLE

LOCATION 2 N. 66 W.  
ELEVATION

DIP AT COLLAR 90°  
BEARING  
DEPTH. 567 ft (172.8 m)

49.0 - 52.9 = 3.9 m. Ag 1.27 og  
Pb 2.46 %  
Zn 6.25 %

pl.

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS			
	FROM	TO		Ag off	Pb %	Zn %	
	0.0	109.1	109.1	0.00	0.00	0.00	
2471	109.1	111.1	2.0	1.15	3.08	4.80	
2472	111.1	113.9	2.8	1.09	2.48	4.38	10.1 m.
2473	113.9	115.1	1.2	2.00	4.73	8.42	Ag 1.09 off
	115.1	116.8	1.7	NOT ASSAYED			Pb 2.59 %
2474	116.8	119.2	2.4	1.35	3.08	5.04	Zn 4.36 %
	119.2	120.7	1.5	NOT ASSAYED			
2475	120.7	122.8	2.1	0.65	1.53	3.12	4.3 m. Ag 1.04 off
2476	122.8	124.0	1.2	1.73	4.35	7.06	 Pb 2.64 %
2477	124.0	125.0	1.0	1.03	2.93	4.08	Zn 4.44 %
2478	125.0	126.2	1.2	0.35	0.70	1.26	
2479	126.2	127.1	0.9	0.29	0.48	0.82	
2480	127.1	128.3	1.2	0.24	0.43	1.02	
2481	128.3	130.4	2.1	0.59	1.28	0.82	
	130.4	134.8	4.4	NOT ASSAYED			
2482	134.8	136.2	1.4	0.62	1.53	2.94	
2483	136.2	137.7	1.5	0.77	2.25	1.98	
2484	137.7	139.6	1.9	0.68	2.48	3.66	
2485	139.6	140.8	1.2	1.32	3.38	6.51	
2486	140.8	142.3	1.5	1.47	2.48	4.50	
2487	142.3	143.8	1.5	0.97	3.30	6.78	
2488	143.8	145.6	1.8	1.47	4.35	6.73	
	145.6	146.7	1.1	NOT ASSAYED			
2802	146.7	147.4	0.7	1.38	3.00	5.10	
	147.4	151.7	4.3	NOT ASSAYED			
2489	151.7	153.2	1.5	1.03	2.78	5.11	
2490	153.2	154.5	1.3	1.24	3.45	5.04	
2491	154.5	156.4	1.9	0.83	1.93	3.90	
	156.4	162.2	5.8	NOT ASSAYED			
2492	162.2	164.2	2.0	0.77	1.78	3.90	
	164.2	165.3	1.1	NOT ASSAYED			
2493	165.3	166.7	1.4	0.74	1.50	2.10	
2494	166.7	168.8	2.1	0.80	1.30	1.98	
2495	168.8	170.0	1.2	0.77	1.78	2.28	
2496	170.0	172.0	2.0	1.03	2.28	3.72	
2497	172.0	174.0	2.0	1.21	2.40	3.90	
2498	174.0	176.0	2.0	0.85	1.88	3.72	
2499	176.0	178.0	2.0	1.12	2.25	6.48	
2500	178.0	180.0	2.0	0.59	1.13	2.64	

LOCATION N. 8N. 86W.

DIP AT COLLAR.

ELEVATION

BEARING.

DEPTH 1486.88 ft (453.2m)

$109.1 - 125.0 = 15.9 \text{ m}$

Ag 0.97 o/s

Pb 2.36%

Zn 3.97%

LOW.

$139.6 - 147.4 = 7.8 \text{ m.}$

Ag 1.81 o/s

Pb 2.90%

Zn 5.18%

$137.7 - 147.4 = 9.7 \text{ M}$

Ag 1.59

Pb 2.81

Zn 4.88

$176.0 - 178.0 = 2 \text{ m. Ag } 1.12 \text{ o/s Pb } 2.25\% \text{ Zn } 6.48\%$

ASSAY N <sup>o</sup>	SECTION		LENGTH ME/RES	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
2801	180.0	180.7	0.7	1.56	2.93	3.66
	180.7	183.3	2.6	NOT ASSAYED		
2803	183.3	184.4	1.1	1.44	3.98	6.00
2804	184.4	185.8	1.4	0.09	0.10	0.12
2805	185.8	187.0	1.2	1.79	3.30	7.36
2806	187.0	189.3	2.3	0.15	0.38	0.34
2807	189.3	190.5	1.2	1.85	3.75	6.00
2808	190.5	192.1	1.6	2.06	4.88	5.48
2809	192.1	193.2	1.1	0.09	0.08	0.14
2810	193.2	194.5	1.3	1.62	3.15	6.33
	194.5	220.8	26.3	NOT ASSAYED		
2811	220.8	222.8	2.0	2.68	4.88	7.34
2812	222.8	224.3	1.5	2.18	4.43	7.18
2813	224.3	225.8	1.5	0.44	0.88	1.98
2814	225.8	228.1	2.3	0.32	0.53	1.68
	228.1	307.0	78.9	NOT ASSAYED		
2815	307.0	307.8	0.8	3.68	7.02	14.93
2816	307.8	309.6	1.8	3.00	5.70	11.26
2817	309.6	311.8	2.2	0.71	0.93	1.88
2818	311.8	313.3	1.5	2.38	5.74	9.45
	313.3	314.0	0.7	NOT ASSAYED		
2819	314.0	317.3	3.3	1.91	4.88	5.76
	317.3	318.8	1.5	NOT ASSAYED		
2820	318.8	319.7	0.9	2.68	5.33	6.34
	319.7	321.7	2.0	NOT ASSAYED		
2821	321.7	322.8	1.1	2.21	4.35	8.15
2822	322.8	324.8	2.0	2.09	4.43	5.88
2823	324.8	326.8	2.0	1.97	3.90	5.64
2824	326.8	327.8	1.0	2.35	4.43	6.44
	327.8	335.0	7.2	NOT ASSAYED		
2825	335.0	335.4	0.4	2.85	4.50	6.79
	335.4	371.5	36.1	NOT ASSAYED		
2826	371.5	373.8	2.3	0.21	0.33	0.56
2827	373.8	375.2	1.4	0.12	0.15	0.16
	375.2	379.2	4.0	NOT ASSAYED		

Note

Continued on Pages 94 &amp; 95

$$183.3 - 194.5 = 11.2 \text{ m}$$

Ag 1.06 ozs.

Pb 2.30%

Zn 3.27%

$$220.8 - 224.3 = 3.5 \text{ m} \quad \text{Ag } 2.47 \text{ ozs}$$

Pb 4.69% Zn 7.27%

$$307.0 - 321.8 = 20.8 \text{ m}$$

Ag 1.69 ozs.

Pb 3.53%

Zn 6.12%

$$335.0 - 335.4 = 0.4 \text{ m} \quad \text{Ag } 2.85 \text{ ozs}$$

Pb 4.50% Zn 6.79%

ASSAY No	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag ogs	Pb %	Zn %
2828	379.2	380.7	1.5	0.12	0.03	0.06
2829	380.7	381.4	0.7	1.15	1.98	4.14
2830	381.4	382.1	0.7	3.65	8.67	17.65
	382.1	388.0	5.9	NOT ASSAYED		
2831	388.0	390.4	2.4	0.53	0.88	1.10
2832	390.4	391.3	0.9	0.06	0.06	0.06
2833	391.3	393.9	2.6	1.29	2.93	4.26
	393.9	403.8	9.9	NOT ASSAYED		
2834	403.8	405.1	1.3	1.83	4.95	7.41
2835	405.1	407.4	2.3	0.74	1.30	1.12
2836	407.4	408.6	1.2	1.91	5.18	6.83
	408.6	453.2	44.6	0.00	0.00	0.00

END OF HOLE

380.7 - 382.1 = 1.4m Ag 2.4 ogs.  
Pb 5.33%.  
Zn 10.9%.

391.3 - 393.9 = 2.6m Ag 1.29 ogs.  
Pb 2.93%. Zn 4.26%.

403.8 - 408.6 = 4.8m Ag 1.33 ogs.  
Pb 3.26%.  
Zn 4.25%.



ASSAY No	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag ggs	Pb %	Zn %
2704	0.0	156.8	156.8	0.00	0.00	0.00
	156.8	157.9	1.1	1.91	3.60	3.90
2705	157.9	158.4	0.5	1.38	3.06	6.44
	158.4	159.1	0.7	NOT ASSAYED		
2706	159.1	160.3	1.2	0.29	0.58	1.06
	160.3	180.4	20.1	NOT ASSAYED		
2707	180.4	181.2	0.8	2.88	7.50	8.53
2708	181.2	182.8	1.6	0.44	0.80	0.49
2709	182.8	185.1	2.3	0.53	1.28	0.94
2710	185.1	186.4	1.3	0.44	1.10	0.94
2711	186.4	188.4	2.0	0.44	0.88	0.80
2712	188.4	189.9	1.5	1.76	3.90	6.11
2713	189.9	192.6	2.7	0.56	1.45	1.40
2714	192.6	193.8	1.2	0.74	2.70	1.22
2715	193.8	194.8	1.0	0.26	0.80	0.38
2716	194.8	197.0	2.2	0.21	0.75	1.02
2717	197.0	198.7	1.7	0.29	0.85	1.22
2718	198.7	199.9	1.2	0.26	0.48	1.04
2719	199.9	201.5	1.6	0.69	1.60	1.18
2720	201.5	202.8	1.3	2.18	5.53	6.33
2721	202.8	203.6	0.8	1.09	2.93	3.54
2722	203.6	204.2	0.6	0.35	0.65	0.54
2723	204.2	206.0	1.8	0.62	1.83	1.60
2724	206.0	208.2	2.2	0.83	1.63	1.48
2725	208.2	209.1	0.9	1.50	3.23	4.74
2726	209.1	210.0	0.9	0.06	0.10	0.10
	210.0	260.0	50.0	0.00	0.00	0.00

END OF HOLE

LOCATION 6N. 66W  
ELEVATION

DIP AT CORNER 90°  
BEARING  
DEPTH 853.0ft (260m)

156.8 - 158.4 = 1.6m. Ag 1.74 ggs  
Pb 3.43%. Zn 4.69%

180.4 - 181.2 = 0.8m. Ag 2.88 ggs  
Pb 7.50%. Zn 8.53%

188.4 - 189.9 = 1.5m. Ag 1.76 ggs  
Pb 3.90%. Zn 6.11%

201.5 - 203.6 = 2.1m. Ag 1.76 ggs  
Pb 4.54%. Zn 5.27%

208.2 - 209.1 = 0.9m. Ag 1.50 ggs  
Pb 3.23%. Zn 4.74%

CM E.C.J.

ASSAY N°	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag ops	Pb %	Zn %
2384	0.0	120.6	120.6	0.00	0.00	0.00
	120.6	121.3	0.7	0.88	1.48	1.14
2385	121.3	123.1	1.8	2.94	5.63	8.65
	123.1	137.0	13.9	NOT ASSAYED		
2386	137.0	138.0	1.0	0.24	0.33	0.54
2387	138.0	139.7	1.7	0.47	0.95	1.28
2388	139.7	140.9	1.2	0.62	0.88	0.74
	140.9	202.2	61.3	NOT ASSAYED		
2389	202.2	203.0	0.8	2.12	4.95	5.53
2390	203.0	204.1	1.1	0.56	1.20	1.06
2391	204.1	206.7	2.6	1.44	4.05	3.00
2392	206.7	209.1	2.4	1.18	2.50	1.74
2393	209.1	209.7	0.6	0.32	0.48	0.38
2394	209.7	211.0	1.3	1.24	3.68	2.46
	211.0	213.7	2.7	NOT ASSAYED		
2395	213.7	214.1	0.4	0.29	0.65	0.24
2396	214.1	215.6	1.5	1.18	3.19	2.52
2397	215.6	216.4	0.8	0.44	0.63	0.34
2398	216.4	219.0	2.6	1.32	3.68	3.00
2399	219.0	220.8	1.8	0.71	1.65	0.92
	220.8	221.6	0.8	NOT ASSAYED		
23	221.6	222.7	1.1	1.12	2.70	5.40
	222.7	232.6	9.0	0.00	0.00	0.00

END OF HOLE

LOCATION 0.00 + 62W  
ELEVATION

DIP AT COLLAR 90°  
BEARING  
DEPTH: 763.12 ft (232.6m)

121.3 - 123.1 = 1.8m Ag 2.94 ops  
Pb 5.63% Zn 8.65%

202.2 - 206.7 = 4.5m Ag 1.35 ops  
Pb 3.51%  
Zn 2.98%

LOW

214.1 - 215.6 = 1.5m Ag 1.18 ops Pb 3.19% Zn 2.52%

LOW

216.4 - 219.0 = 2.6m Ag 1.32 ops Pb 3.68% Zn 3.00%

LOW

221.6 - 222.7 = 1.1m Ag 1.12 ops Pb 2.70% Zn 5.40%

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag. ops	Pb %	Zn %
	0.0	113.2	113.2	0.00	0.00	0.00
2837	113.2	115.0	1.8	1.09	2.38	3.48
2838	115.0	116.0	1.0	0.71	1.83	2.00
2839	116.0	118.0	2.0	0.77	1.98	3.54
2840	118.0	120.0	2.0	0.85	1.90	3.48
2841	120.0	122.0	2.0	0.77	1.75	3.18
2842	122.0	124.0	2.0	0.83	1.99	3.00
	124.0	127.6	3.6	NOT ASSAYED		
2843	127.6	128.9	1.3	0.85	1.84	2.76
2844	128.9	130.0	1.1	0.71	1.48	2.46
	130.0	132.6	2.6	NOT ASSAYED		
2845	132.6	134.4	1.8	0.83	1.23	1.66
2846	134.4	135.9	1.5	1.06	2.50	4.02
2847	135.9	136.8	0.9	1.03	2.48	5.40
2848	136.8	137.8	1.0	0.83	1.78	2.76
2849	137.8	139.3	1.5	0.88	1.93	2.46
2850	139.3	141.4	2.1	1.09	2.45	3.18
2851	141.4	142.3	0.9	1.21	2.59	3.90
2852	142.3	144.5	2.2	1.27	2.70	4.02
2853	144.5	145.4	0.9	1.91	3.53	5.93
2854	145.4	146.6	1.2	1.35	2.78	4.02
	146.6	150.6	4.0	NOT ASSAYED		
2855	150.6	151.5	0.9	0.62	1.23	1.18
	151.5	156.5	5.0	NOT ASSAYED		
2856	156.5	158.5	2.0	1.18	2.50	4.38
2857	158.5	160.0	1.5	1.29	2.78	4.20
2858	160.0	160.7	0.7	0.85	1.73	2.64
	160.7	175.6	14.9	NOT ASSAYED		
2859	175.6	177.1	1.5	0.29	0.58	0.68
2860	177.1	178.6	1.5	0.26	0.43	0.70
	178.6	188.5	9.9	NOT ASSAYED		
2861	188.5	189.4	0.9	0.56	1.53	3.48
2862	189.4	191.1	2.7	0.91	2.18	5.40
	191.1	191.6	0.5	NOT ASSAYED		
2863	191.6	193.5	1.9	0.97	2.93	5.64
2864	193.5	194.5	1.0	1.47	3.23	7.20
2865	194.5	195.7	1.2	1.85	3.75	8.00
2866	195.7	196.3	0.6	1.73	4.58	4.02

2.4 m. Ag 1.050gs  
Pb 2.49% Zn 4.54%

3.1 m. Ag 1.460gs  
Pb 2.94% Zn 4.57%

NOTE. Continued on Pages 106 & 107

LOCATION 6N 88 W.  
 ELEVATION } 4358.66 ft  
 } 1228.52 m.

DIP AT COLLAR. 90°  
 BEARING.  
 DEPTH 1525 ft (464.82m)

113.2 m - 124.0 m = 10.8 m.

Ag 0.84 ogs.  
 Pb 1.97%  
 Zn 3.21%

LOW.

134.4 m - 146.6 m = 12.2 m.

Ag 1.16 ogs  
 Pb 2.51%  
 Zn 3.81%

LOW.

156.5 - 160.0 = 3.5 m. Ag 1.23 ogs  
 Pb 2.62% Zn 4.30% LOW

188.5 - 191.1 = 2.6 m Ag 0.79 ogs  
 Pb 1.96% Zn 4.74% LOW.

188.5 - 204.2 = 15.7 m

191.6 - 196.3 = 4.7 m.  
 Ag 1.40 ogs  
 Pb 3.41%  
 Zn 6.37%

Ag 1.04 ogs.  
 Pb 2.42%  
 Zn 4.51%

ASSAY N°	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
2867	196.3	197.6	1.3	0.97	2.85	2.40
2868	197.6	200.1	2.5	0.83	1.93	2.14
2869	200.1	201.5	1.4	1.35	2.48	5.76
2870	201.5	203.3	1.8	1.00	1.88	4.68
2871	203.3	204.2	0.9	0.77	1.70	4.08
2872	204.2	205.5	1.3	0.74	2.18	1.47
	205.5	209.4	3.9	NOT ASSAYED		
2873	209.4	211.2	1.8	1.12	3.60	3.60
	211.2	229.6	18.4	NOT ASSAYED		
2874	229.6	230.7	1.1	1.41	2.85	6.29
	230.7	230.8	0.1	NOT ASSAYED		
2875	230.8	231.9	1.1	1.06	2.63	4.50
2876	231.9	233.5	1.6	0.53	1.23	1.40
2877	233.5	234.2	0.7	2.59	5.71	7.18
	234.2	234.6	0.4	NOT ASSAYED		
2878	234.6	236.1	1.5	0.56	1.18	1.70
2879	236.1	237.6	1.5	0.21	0.58	0.76
	237.6	239.1	1.5	NOT ASSAYED		
2880	239.1	239.9	0.8	0.97	2.38	2.14
	239.9	244.0	4.1	NOT ASSAYED		
2881	244.0	246.0	2.0	2.00	4.65	6.90
2882	246.0	248.0	2.0	2.27	4.73	8.11
2883	248.0	250.0	2.0	1.88	4.20	8.07
2884	250.0	251.8	1.8	0.35	0.75	1.54
2885	251.8	253.0	1.2	4.18	7.73	16.75
2886	253.0	254.0	1.0	1.35	2.70	4.02
	254.0	273.1	19.1	NOT ASSAYED		
2887	273.1	274.6	1.5	2.47	5.21	11.86
2888	274.6	275.7	1.1	3.59	6.93	14.44
	275.7	278.0	2.3	NOT ASSAYED		
2889	278.0	279.3	1.3	1.12	2.43	5.64
2890	279.3	281.0	1.7	2.24	5.11	6.05
2891	281.0	282.5	1.5	1.71	3.75	5.86
2892	282.5	284.0	1.5	2.15	4.35	5.64
2893	284.0	285.6	1.6	2.50	4.95	7.58
2894	285.6	286.7	1.1	2.00	3.68	7.69
2867	286.6	299.1	11.5	NOT ASSAYED		

2.6 m. Ag 2.94%  
Pb 5.94% Zn 12.95%

NOTE: Continued on Pages 108 & 109.

ASSAY LOGGED ON P 105 viz.

$$188.5 - 204.2 = 15.7 \text{ M.}$$

Ag 1.04 ogs.

Pb 2.42%.

Zn 4.51%.

$$209.4 - 211.2 = 1.8 \text{ m. Ag 1.12 ogs. Pb 3.60\%, Zn 3.60\%}$$

$$229.6 - 230.7 = 1.1 \text{ m. Ag 1.41 ogs. Pb 2.85\%, Zn 6.29\%}$$

$$230.8 - 234.2 = 3.4 \text{ m. Ag 1.13 ogs.}$$

Pb 2.61% LOW.

Zn 3.59%.

$$244.0 - 254.0 = 10.0 \text{ m}$$

Ag 1.93 ogs

Pb 4.05%

Zn 7.31%

$$273.1 - 286.7 = 13.6 \text{ m}$$

Ag 1.83 ogs

Pb 3.78%

Zn 6.55%

ASSAY No	SECTION		LENGTH METRES	ASSAYS		
	FROM	TO		Ag %	Pb %	Zn %
2895	299.1 ✓	300.4 ✓	1.3	1.29	2.63 ✓	3.42 ✓
2896	300.4 ✓	302.0 ✓	1.6	0.53	1.15 ✓	2.10 ✓
2897	302.0 ✓	304.0 ✓	2.0	0.88	1.88 ✓	2.76 ✓
2898	304.0 ✓	306.0 ✓	2.0	1.47	3.15 ✓	4.92 ✓
2899	306.0 ✓	307.2 ✓	1.2	1.76	3.98 ✓	6.23 ✓
	307.2 ✓	316.3 ✓	9.1	NOT ASSAYED		
2900	316.3 ✓	317.8 ✓	1.5	0.15	0.40 ✓	1.36 ✓
2191	317.8 ✓	319.4 ✓	1.6	0.12	0.38 ✓	0.95 ✓
	319.4 ✓	320.6 ✓	1.2	NOT ASSAYED		
2192	320.6 ✓	322.6 ✓	2.0	0.26	0.50 ✓	0.92 ✓
2193	322.6 ✓	324.5 ✓	1.9	0.15	0.23 ✓	0.52 ✓
	324.5 ✓	374.0 ✓	49.5	NOT ASSAYED		
2194	374.0 ✓	375.2 ✓	1.2	0.74	1.68	1.92
2195	375.2 ✓	376.4 ✓	1.2	3.68	7.65 ✓	11.53 ✓
2196	376.4 ✓	377.4 ✓	1.0	2.00	4.95 ✓	5.76 ✓
	377.4 ✓	378.9 ✓	1.5	NOT ASSAYED		
2197	378.9 ✓	380.2 ✓	1.3	1.47	3.83 ✓	2.10 ✓
	380.2 ✓	383.4 ✓	3.2	NOT ASSAYED		
2198	383.4 ✓	384.1 ✓	1.7	3.12 ✓	7.41 ✓	8.18 ✓
	384.1 ✓	384.8 ✓	0.7	NOT ASSAYED		
2199	384.8 ✓	385.6 ✓	0.8	1.24	2.48 ✓	3.48 ✓
2200	385.6 ✓	386.8 ✓	1.2	0.44	0.70 ✓	1.28 ✓
	386.8 ✓	390.4 ✓	3.6	NOT ASSAYED		
2727	390.4 ✓	391.7 ✓	1.3	0.97	1.95 ✓	3.06 ✓
2728	391.7 ✓	392.9 ✓	1.2	1.82	3.15 ✓	3.12 ✓
2729	392.9 ✓	394.6 ✓	1.7	2.24	4.92 ✓	8.35 ✓
	394.6 ✓	399.0 ✓	4.4	NOT ASSAYED		
2730	399.0 ✓	400.2 ✓	1.2	0.85	0.65 ✓	1.00 ✓
2735	400.2 ✓	402.0 ✓	1.8	0.59	0.68 ✓	1.44 ✓
	402.0 ✓	402.8 ✓	0.8	NOT ASSAYED		
2731	402.8 ✓	404.0 ✓	1.2	1.53	3.98 ✓	4.86 ✓
2732	404.0 ✓	405.5 ✓	1.5	0.88	1.88 ✓	1.92 ✓
2733	405.5 ✓	406.6 ✓	1.1	3.27	6.98 ✓	8.87 ✓
2734	406.6 ✓	408.1 ✓	1.5	3.03	6.38 ✓	9.36 ✓
	408.1 ✓	421.8 ✓	13.7	NOT ASSAYED		

NOTE:- Continued on Pages 110 & 111

$$304.0 - 307.2 = 3.2m \quad Ag \ 1.58\%s$$

$$Pb \ 3.46\% \quad Zn \ 5.41\%$$

$$375.2 - 377.4 = 2.2m \quad Ag \ 2.92\%s$$

$$Pb \ 6.42\% \quad Zn \ 8.91\%$$

$$383.4 - 384.1 = 1.7m \quad Ag \ 3.12\%s$$

$$Pb \ 7.41\% \quad Zn \ 3.18\%$$

$$390.4 - 394.6 = 4.2m \quad Ag \ 1.58\%s$$

$$Pb \ 3.50\%$$

$$Zn \ 5.22\%$$

$$402.8 - 408.1 = 5.3m$$

$$Ag \ 2.13\%s$$

$$Pb \ 4.69\%$$

$$Zn \ 6.13\%$$

E.C.J.

ASSAY N	SECTION		CORE LENGTH	ASSAYS		
	FROM	TO		Ag ops	Pb %	Zn %
2736	421.8 ✓	422.9 ✓	1.1	0.32	0.45 ✓	0.46 ✓
2737	422.9 ✓	423.6 ✓	0.7	0.53	0.65 ✓	0.46 ✓
2738	423.6 ✓	424.7 ✓	1.1	0.32	0.55 ✓	0.64 ✓
	424.7 ✓	438.8 ✓	14.1	NOT ASSAYED		
2739	438.8 ✓	440.4 ✓	1.6	0.68	1.55 ✓	1.38 ✓
	440.4 ✓	443.0 ✓	2.6	NOT ASSAYED		
2740	443.0 ✓	444.5 ✓	1.5	0.32	0.35 ✓	0.42 ✓
	444.5 ✓	464.82 ✓	20.32	0.00	0.00	0.00
			END OF HOLE			



ASSAY No SECTION CORE ASSAYS

FROM (M) TO (M) LENGTH Hg. pct Pb. pct Zn. pct

79.6 / 79.6 / 79.6 / 3.0 / 0.94 / 1.98 / 4.02

82.6 / 84.6 / 84.6 / 2.0 / 0.80 / 1.68 / 4.02

84.6 / 86.6 / 86.6 / 2.0 / 0.97 / 2.23 / 4.32

86.6 / 89.6 / 89.6 / 3.0 / 1.03 / 2.03 / 4.20

89.6 / 92.6 / 92.6 / 3.0 / 1.35 / 2.70 / 5.64

92.6 / 95.6 / 95.6 / 3.0 / 1.24 / 2.45 / 4.80

95.6 / 98.6 / 98.6 / 3.0 / 1.03 / 2.78 / 4.56

98.6 / 101.6 / 101.6 / 3.0 / 1.27 / 2.85 / 4.92

101.6 / 103.6 / 103.6 / 2.0 / 1.53 / 3.60 / 6.38

103.6 / 106.6 / 106.6 / 3.0 / 0.88 / 2.03 / 3.90

106.6 / 109.6 / 109.6 / 3.0 / 0.94 / 2.23 / 3.18

109.6 / 112.6 / 112.6 / 3.0 / 0.91 / 2.43 / 3.30

112.6 / 115.6 / 115.6 / 3.0 / 0.88 / 2.33 / 4.74

115.6 / 118.6 / 118.6 / 3.0 / 0.74 / 1.73 / 4.38

118.6 / 128.8 / 128.8 / 10.2 / NOT ASSAYED

128.8 / 130.8 / 130.8 / 2.0 / 1.82 / 3.88 / 5.28

130.8 / 132.0 / 132.0 / 1.2 / 1.85 / 3.53 / 6.01

132.0 / 133.2 / 133.2 / 1.2 / 1.76 / 3.30 / 4.32

133.2 / 134.7 / 134.7 / 1.5 / 1.89 / 2.43 / 4.14

134.7 / 139.7 / 139.7 / 5.0 / NOT ASSAYED

139.7 / 141.5 / 141.5 / 1.8 / 1.88 / 3.60 / 7.47

141.5 / 147.3 / 147.3 / 5.8 / NOT ASSAYED

147.3 / 148.6 / 148.6 / 1.3 / 1.32 / 2.63 / 4.80

148.6 / 203.1 / 203.1 / 54.5 / NOT ASSAYED

203.1 / 204.1 / 204.1 / 1.0 / 2.18 / 4.58 / 7.01

204.1 / 207.1 / 207.1 / 3.0 / NOT ASSAYED

207.1 / 209.1 / 209.1 / 2.0 / 0.29 / 0.38 / 1.05

209.1 / 211.8 / 211.8 / 2.7 / 1.12 / 3.00 / 4.80

211.8 / 260.9 / 260.9 / 49.1 / NOT ASSAYED

260.9 / 261.9 / 261.9 / 1.0 / 3.91 / 5.61 / 14.38

261.9 / 263.2 / 263.2 / 1.3 / NOT ASSAYED

263.2 / 263.7 / 263.7 / 0.5 / 3.27 / 5.45 / 13.70

263.7 / 324.6 / 324.6 / 60.9 / NOT ASSAYED

324.6 / 326.1 / 326.1 / 1.5 / 0.88 / 2.03 / 3.78

326.1 / 387.1 / 387.1 / 61.0 / NOT ASSAYED

Note: Continued on pages 114 & 115

LOCATION 10N 86W.

DIP AT COLLAR 90°

ELEVATION.

BEARING.

DEPTH 1388 ft (423.1 m).

79.6 - 118.6 = 39.0 m.

89.6 - 103.6 = 14.0 m

Ag 1.27 ozs.

Pb 2.82%

Zn 5.18%

Ag 1.03 ozs.

Pb 2.35%

Zn 4.31%

LOW.

112.6 - 118.6 = 6.0 m. Ag 0.81 ozs

LOW.

Pb 2.03% Zn 4.56%

128.8 - 134.7 = 5.9 m

Ag 1.68 ozs.

Pb 3.15%

Zn 4.94%

139.7 - 141.5 = 1.8 m Ag 1.88 ozs Pb 3.60% Zn 7.47%

147.3 - 148.6 = 1.3 m. Ag 1.32 ozs Pb 2.63% Zn 4.80%

203.1 - 204.1 = 1.0 m. Ag 2.18 ozs Pb 4.58% Zn 7.01%

209.1 - 211.8 = 2.7 m Ag 1.12 ozs Pb 3.00% Zn 4.80%

260.9 - 263.7 = 2.8 m Ag 1.98 ozs

Pb 3.00%

Zn 7.58%

E.C.I.

ASSAY N <sup>o</sup>	SECTION		LENGTH METERS	ASSAYS		
	FROM (M)	TO (M)		Ag. ogs	Pb %	Zn %
2974	387.1	388.1	1.0	1.24	3.98	3.24
2975	388.1	389.1	1.0	1.71	4.43	4.50
2976	389.1	390.1	1.0	1.44	4.88	4.80
2977	390.1	391.1	1.0	0.70	1.88	0.94
2978	391.1	393.1	2.0	0.29	0.68	1.38
2979	393.1	395.1	2.0	0.32	0.43	0.63
2980	395.1	397.1	2.0	0.50	0.68	0.85
2981	397.1	399.1	2.0	0.38	0.80	1.36
2982	399.1	402.1	2.0	0.53	0.68	1.18
	402.1	423.1	21.0	0.00	0.00	0.00
END OF HOLE						

387.1 - 390.1 = 3m Ag 1.46 ogs  
 Pb 4.43 %  
 Zn 4.18 %

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS		
	FROM (M)	TO (M)		Ag %	Pb %	Zn %
	0.0	113.8	113.8	0.00	0.00	0.00
2769	113.8	115.2	1.4	1.56	3.00	6.85
2770	115.2	116.5	1.3	0.44	0.83	1.94
2771	116.5	119.2	2.7	0.85	2.08	4.14
2772	119.2	122.2	3.0	0.91	1.98	4.74
2773	122.2	124.4	2.2	1.03	2.78	4.98
2774	124.4	126.6	2.2	0.91	2.08	3.42
	126.6	133.9	7.3	NOT ASSAYED		
2775	133.9	135.1	1.2	1.29	3.00	5.10
	135.1	172.2	37.1	NOT ASSAYED		
2776	172.2	173.6	1.4	0.85	1.98	3.30
2777	173.6	175.0	1.4	1.09	2.88	5.10
2778	175.0	177.7	2.7	0.85	1.88	4.05
	177.7	227.0	49.3	NOT ASSAYED		
2779	227.0	227.7	0.7	1.59	3.53	4.30
2780	227.7	229.0	1.3	3.18	6.41	11.84
	229.0	229.5	0.5	NOT ASSAYED		
2781	229.5	231.0	1.5	0.29	0.75	1.18
	231.0	317.6	86.6	NOT ASSAYED		
2782	317.6	318.6	1.0	2.65	5.42	6.50
	318.6	321.9	3.3	NOT ASSAYED		
2783	321.9	322.8	0.9	1.27	2.75	4.50
2784	322.8	324.8	2.0	1.44	3.44	5.55
2785	324.8	325.8	1.0	0.62	1.65	1.66
	325.8	326.6	0.8	NOT ASSAYED		
2786	326.6	328.6	2.0	1.12	2.85	3.98
2787	328.6	331.1	2.5	0.83	1.63	2.10
	331.1	336.5	5.4	NOT ASSAYED		
2788	336.5	337.6	1.1	0.74	2.50	2.70
	337.6	340.6	3.0	NOT ASSAYED		
2789	340.6	342.6	2.0	0.47	1.38	2.20
	342.6	344.0	1.4	NOT ASSAYED		
2790	344.0	345.6	1.6	1.15	3.23	4.05
	345.6	355.1	9.5	NOT ASSAYED		
2791	355.1	355.7	0.6	0.47	0.83	1.08
2792	355.7	356.7	1.0	2.50	5.18	8.75
2793	356.7	357.4	0.7	2.15	4.43	7.87
	357.4	357.6	0.2	NOT ASSAYED		

NOTE: Continued on PAGES 118 & 119.

LOCATION 8 N. 88 W.

DIP AT COLLAR 90°

ELEVATION 1327.26 m.

BEARING

4354.52 ft

DEPTH 1410 ft (429.8 m)

$113.8 - 126.6 = 12.8 \text{ m}$

Ag 0.94 ozs.

Pb 2.15 %

Zn 4.37 %

LOW

$133.9 - 135.1 = 1.2 \text{ m. Ag } 1.29 \text{ ozs Pb } 3.00\% \text{ Zn } 5.10\%$

$173.6 - 175.0 = 1.4 \text{ m Ag } 1.09 \text{ ozs Pb } 2.38\% \text{ Zn } 5.10\%$

$172.2 - 177.7 = 5.5 \text{ m.}$

Ag 0.91 ozs Pb 2.03%

Zn 4.13%

$227.0 - 229.0 = 2.0 \text{ m. Ag } 2.62 \text{ ozs Pb } 5.40\%$

Zn 9.20%

$317.6 - 318.6 = 1.0 \text{ m Ag } 2.65 \text{ ozs Pb } 5.42\% \text{ Zn } 6.5\%$

$321.9 - 324.8 = 2.9 \text{ m. Ag } 1.39 \text{ ozs Pb } 2.54\%$

Zn 5.22%

$344.0 - 345.6 = 1.6 \text{ m. Ag } 1.15 \text{ ozs Pb } 3.23\% \text{ Zn } 4.05\%$

ASSAYS SHOWN  
ON Page 119.

ASSAY N <sup>o</sup>	SECTION		LENGTH (M/RES)	ASSAYS		
	FROM (M)	TO (M)		Ag ops	Pb %	Zn %
2794	357.6	358.6	1.0	1.65	3.98	5.00
2795	358.6	359.6	1.0	1.76	3.56	5.50
2796	359.6	360.9	1.3	1.79	3.94	6.57
	360.9	361.3	0.4	NOT ASSAYED		
2797	361.3	362.3	1.0	1.18	2.38	4.40
2798	362.3	363.3	1.0	1.62	3.60	4.48
2799	363.3	364.3	1.0	1.46	3.30	6.28
2800	364.3	365.3	1.0	2.15	4.28	7.68
3001	365.3	366.0	0.7	2.76	5.18	7.56
	366.0	381.3	15.3	NOT ASSAYED		
3002	381.3	383.3	2.0	0.38	0.48	0.52
3003	383.3	385.3	2.0	0.35	0.20	0.18
3004	385.3	386.9	1.6	0.83	0.65	0.77
3005	386.9	388.2	1.3	2.88	6.96	9.44
3006	388.2	390.2	2.0	0.62	1.15	1.70
3007	390.2	392.6	2.4	0.41	0.38	0.62
3008	392.6	394.7	2.1	1.85	3.83	2.88
	394.7	403.4	8.7	NOT ASSAYED		
3009	403.4	405.9	2.5	1.24	2.85	3.12
	405.9	429.8	23.9	0.00	0.00	0.00
	END OF HOLE					

355.7 - 366.0 = 10.3 m.

Ag 1.76 ops.

Pb 3.70%

Zn 5.94%

386.9 - 388.2 = 1.3 m. Ag 2.88 ops Pb 6.96% Zn 9.44%

392.6 - 394.7 = 2.1 m. Ag 1.35 ops Pb 3.83% Zn 2.88%

low

403.4 - 405.9 = 2.5 m Ag 1.24 ops Pb 2.85% Zn 3.12%

low

ASSAY No SECTION LENGTH

FROM (M) / (M) METRES. Ag. off. 89.4 0.00

89.4 / 90.5 / 1.1 0.68 / 1.88 / 2.94

90.5 / 93.5 / 3.0 NOT ASSAYED

93.5 / 96.5 / 3.0 0.77 / 1.70 / 2.88

96.5 / 99.5 / 3.0 1.18 / 1.78 / 4.50

99.5 / 102.5 / 3.0 1.27 / 2.08 / 5.34

102.5 / 105.5 / 3.0 0.74 / 1.68 / 2.88

105.5 / 108.5 / 3.0 0.77 / 1.20 / 3.30

108.5 / 111.5 / 3.0 1.38 / 3.66 /

111.5 / 114.5 / 3.0 1.12 / 1.68 / 4.20

114.5 / 117.5 / 3.0 1.03 / 1.78 / 4.02

117.5 / 120.5 / 3.0 0.85 / 1.58 / 3.96

120.5 / 123.7 / 3.2 1.12 / 2.15 / 4.86

123.7 / 128.8 / 5.1 NOT ASSAYED

128.8 / 133.7 / 4.9 0.68 / 1.28 / 3.54

133.7 / 138.5 / 4.8 1.65 / 2.58 / 4.92

138.5 / 143.3 / 4.8 2.50 / 3.50 / 6.00

143.3 / 148.1 / 4.8 3.50 / 4.50 / 8.00

148.1 / 152.9 / 4.8 4.50 / 5.50 / 10.00

152.9 / 157.7 / 4.8 5.50 / 6.50 / 12.00

157.7 / 162.5 / 4.8 6.50 / 7.50 / 14.00

162.5 / 167.3 / 4.8 7.50 / 8.50 / 16.00

167.3 / 172.1 / 4.8 8.50 / 9.50 / 18.00

172.1 / 176.9 / 4.8 9.50 / 10.50 / 20.00

176.9 / 181.7 / 4.8 10.50 / 11.50 / 22.00

181.7 / 186.5 / 4.8 11.50 / 12.50 / 24.00

186.5 / 191.3 / 4.8 12.50 / 13.50 / 26.00

191.3 / 196.1 / 4.8 13.50 / 14.50 / 28.00

196.1 / 200.9 / 4.8 14.50 / 15.50 / 30.00

200.9 / 205.7 / 4.8 15.50 / 16.50 / 32.00

205.7 / 210.5 / 4.8 16.50 / 17.50 / 34.00

210.5 / 215.3 / 4.8 17.50 / 18.50 / 36.00

215.3 / 220.1 / 4.8 18.50 / 19.50 / 38.00

220.1 / 224.9 / 4.8 19.50 / 20.50 / 40.00

224.9 / 229.7 / 4.8 20.50 / 21.50 / 42.00

229.7 / 234.5 / 4.8 21.50 / 22.50 / 44.00

234.5 / 239.3 / 4.8 22.50 / 23.50 / 46.00

239.3 / 244.1 / 4.8 23.50 / 24.50 / 48.00

244.1 / 248.9 / 4.8 24.50 / 25.50 / 50.00

248.9 / 253.7 / 4.8 25.50 / 26.50 / 52.00

253.7 / 258.5 / 4.8 26.50 / 27.50 / 54.00

258.5 / 263.3 / 4.8 27.50 / 28.50 / 56.00

263.3 / 268.1 / 4.8 28.50 / 29.50 / 58.00

268.1 / 272.9 / 4.8 29.50 / 30.50 / 60.00

Note: Continued on pages 122 - 123

LOCATION 10 N. 88 W.

DIP AT CORNER 90°

ELEVATION 4352.95 ft

BEARING

1326.78 m.

DEPTH 1536 ft (468.2 m)

99.5 - 102.5 = 3.0 m. Ag 1.27 ozs. Pb 2.08%. Zn 5.34%.

120.5 - 123.7 = 3.2 m. Ag 1.12 ozs. Pb 2.15%. Zn 4.86%.

235.9 - 237.2 = 1.3 m. Ag 2.50 ozs. Pb 5.61%. Zn 9.78%.

235.9 - 244.4 = 8.5 m

LOW

240.7 - 244.4 = 3.7 m. Ag 1.55 ozs.  
Pb 2.85% Zn 5.16%

Ag 1.23 ozs. Pb 2.46%  
Zn 4.18%

245.4 - 246.0 = 0.6 m. Ag 1.41 ozs. Pb 2.30% Zn 6.84%

327.5 - 348.4 = 20.9 m.

Ag 2.41 ozs.

Pb 5.35%

Zn 9.65%

ASSAY No	SECTION		LENGTH METRES	ASSAYS		
	FROM (M)	TO (M)		Ag ass	Pb %	Zn %
2751	401.7	402.5	0.8	1.68	4.80	5.76
2752	402.5	403.4	0.9	2.06	5.33	5.16
2753	403.4	403.7	0.3	0.24	0.25	0.40
2754	403.7	404.7	1.0	2.21	4.43	4.14
2755	404.7	406.0	1.3	3.12	6.38	9.34
2756	406.0	408.2	2.2	0.59	1.78	0.88
2757	408.2	408.9	0.7	0.35	0.55	0.53
2758	408.9	409.6	0.7	1.91	7.50	5.67
2759	409.6	410.6	1.0	1.76	5.97	6.59
2760	410.6	411.6	1.0	0.35	0.35	0.30
2761	411.6	412.6	1.0	0.26	0.15	0.14
2762	412.6	413.6	1.0	0.68	1.23	0.72
2763	413.6	414.6	1.0	0.41	0.43	0.50
2764	414.6	415.6	1.0	0.47	0.48	1.25
2765	415.6	416.6	1.0	0.59	1.18	0.90
2766	416.6	417.6	1.0	0.50	0.75	0.74
2767	417.6	419.6	2.0	0.38	0.53	0.46
2768	419.6	421.1	1.5	0.83	1.35	1.54
	421.1	468.2	47.1	0.00	0.00	0.00

END OF HOLE

$$\underline{401.7 - 410.6 = 8.9 \text{ m}}$$

Ag 1.59%

Pb 4.15%

Zn 4.33%

E.C.J.

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS		
	FROM (M)	TO (M)		Ag ops	Pb %	Zn %
	0.0	237.8	237.8	0.00	0.00	0.00
3010	237.8	239.8	2.0	0.41	0.93	0.65
3011	239.8	241.0	1.2	1.03	2.45	1.63
3012	241.0	242.1	1.1	3.12	6.08	8.00
	242.1	246.2	4.1	NOT ASSAYED		
3013	246.2	247.5	1.3	0.83	2.23	3.28
	247.5	317.6	70.1	NOT ASSAYED		
3014	317.6	318.2	0.6	4.32	7.25	8.32
3015	318.2	318.8	0.6	8.82	15.59	23.00
	318.8	346.5	27.7	NOT ASSAYED		
3016	346.5	347.0	0.5	0.41	0.78	0.74
	347.0	347.8	0.8	NOT ASSAYED		
3017	347.8	348.8	1.0	1.56	4.13	4.86
	348.8	352.2	3.4	NOT ASSAYED		
3018	352.2	353.6	1.4	0.65	1.58	1.50
3019	353.6	355.1	1.5	0.62	1.13	1.08
3020	355.1	356.6	1.5	0.56	1.31	1.50
3021	356.6	360.0	3.4	1.24	3.13	5.40
3022	360.0	361.5	1.5	0.77	1.65	2.38
3023	361.5	362.1	0.6	2.91	8.10	9.68
	362.1	363.0	0.9	NOT ASSAYED		
3024	363.0	365.0	2.0	1.91	5.18	6.16
	365.0	367.1	2.1	NOT ASSAYED		
3025	367.1	368.3	1.2	2.94	6.74	8.65
3026	368.3	370.0	1.7	0.77	2.06	2.90
	370.0	419.7	49.7	NOT ASSAYED		
3027	419.7	422.3	2.6	0.53	1.13	2.68
	422.3	425.8	3.5	NOT ASSAYED		
3028	425.8	426.8	1.0	0.59	1.33	2.70
3029	426.8	428.3	1.5	1.50	3.08	3.54
3030	428.3	429.8	1.5	1.27	2.70	4.65
	429.8	431.7	1.9	NOT ASSAYED		
3031	431.7	434.4	2.7	0.80	2.56	2.22
	434.4	435.1	0.7	NOT ASSAYED		

NOTE. Continued on Pages 126 & 127.

LOCATION Baseline . 88 W.

DIP AT CORNER 90°

ELEVATION

BEARING

DEPTH 477.0 m (1565 ft)

239.8 - 242.1 = 2.3 m Ag 2.03 ggs Pb 4.19%  
Zn 4.68%

317.6 - 318.8 = 1.2 m. Ag 6.57 ggs Pb 11.42%  
Zn 15.66%

347.8 - 348.8 = 1.0 m. Ag 1.56 ggs Pb 4.13% Zn 4.86%

356.6 - 368.3 = 11.7 m

Ag 1.24 ggs.

Pb 3.11%

Zn 4.30%

426.8 - 429.8 = 3.0 m Ag 1.39 ggs Pb 2.89%  
Zn 4.10%

E.C.J.

ASSAY N <sup>o</sup>	SECTION		LENGTH METRES	ASSAYS		
	FROM (M)	TO (M)		Ag. ogs	Pb %	Zn %
3032	<del>435.1</del>	435.8	0.1		SAMPLE MISSING	
3033	435.8	436.6	0.8	1.00	3.00	3.42
3034	436.6	437.6	1.0	1.18	4.13	2.46
3035	437.6	438.6	1.0	1.03	3.98	3.20
3036	438.6	439.6	1.0	1.47	5.89	6.32
	439.6	444.7	5.1	NOT ASSAYED		
3037	444.7	445.9	1.2	1.06	3.30	2.52
	445.9	477.0	31.1	0.00	0.00	0.00
	END OF HOLE					

435.8 - 439.6 = 3.8 m.  
 Ag 1.97 ogs  
 Pb 4.32 %  
 Zn 3.87 %

E.O.L.

ASSAY NUMBER	SECTION		CORE LENGTH (M)	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
3601	0.0 ✓ 101.5 ✓	101.5 ✓ 103.9 ✓	101.5 ✓ 2.4 ✓	0.00 ✓ 26.40 ✓	0.00 ✓ 1.83 ✓	0.00 ✓ 3.70 ✓
3602	103.9 ✓	105.4 ✓	1.5 ✓	25.37 ✓	2.05 ✓	3.20 ✓
3603	105.4 ✓	106.9 ✓	1.5 ✓	48.34 ✓	3.18 ✓	2.85 ✓
3604	106.9 ✓	108.4 ✓	1.5 ✓	41.49 ✓	3.45 ✓	2.46 ✓
3605	108.4 ✓	109.9 ✓	1.5 ✓	8.91 ✓	0.68 ✓	0.85 ✓
3606	109.9 ✓	111.9 ✓	2.0 ✓	77.83 ✓	5.60 ✓	9.95 ✓
3607	111.9 ✓	113.4 ✓	1.5 ✓	31.20 ✓	2.18 ✓	3.60 ✓
3608	113.4 ✓	115.2 ✓	1.8 ✓	5.14 ✓	0.25 ✓	0.18 ✓
	115.2 ✓	152.7 ✓	57.5 ✓	0.00 ✓	0.00 ✓	0.00 ✓

END OF HOLE

LATITUDE 8N  
 DEPARTURE 62W.  
 ELEVATION

DIP AT COLLAR  
 BEARING 122°  
 DEPTH 152.7 m. (501 ft.)

109.9 - 111.9 = 2.0 m (6.6 ft) Ag 77.83 g/t  
 Pb 5.60% Zn 9.95%



ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag %	Pb %	Zn %
	0.0	72.9	72.0	0.00	0.00	0.00
			END OF HOLE			

LATITUDE  
DEPARTURE  
ELEVATION

6N  
60W

DIP AT COLLAR  
BEARING  
DEPTH

72.0 m  
(lost in OB)

ECJ.

29.6.76 - 5.7.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
3609	0.00	83.5	83.5	0.00	0.00	0.00
	83.5	85.0	1.5	9.94	0.60	0.43
	85.0	92.3	7.3	NOT ASSAYED		
3610	92.3	93.8	1.5	6.17	0.05	0.23
	93.8	94.8	1.0	NOT ASSAYED		
3611	94.8	96.3	1.5	5.14	0.02	0.35
	96.3	115.2	18.9	NOT ASSAYED		
3612	115.2	117.0	1.8	33.26	2.93	4.60
3613	117.0	118.9	1.9	75.77	4.50	8.70
	118.9	165.5	46.6	0.00	0.00	0.00

END OF HOLE

LATITUDE 4N

DIP AT COLLAR 90°

DEPARTURE 112.60 W

BEARING.

ELEVATION

DEPTH: 165.5 m. (543 ft)

115.2 - 118.7 = 3.7 m (12 ft) Ag. 55.09 g/t  
 Pb 3.7% Zn 6.71%

30.7.76 - 4.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	70.6	70.6	0.00	0.00	0.00
3614	70.6	72.1	1.5	35.31	2.00	3.40
3615	72.1	73.6	1.5	38.40	2.60	2.65
3616	73.6	75.1	1.5	17.14	1.23	2.80
3617	75.1	76.6	1.5	20.23	1.25	4.08
3618	76.6	78.1	1.5	30.17	2.13	4.40
3619	78.1	79.9	1.8	45.26	3.65	6.38
	79.9	82.6	2.7	NOT ASSAYED		
3620	82.6	84.1	1.5	30.17	2.05	2.63
3621	84.1	85.6	1.5	25.37	1.30	1.33
3622	85.6	87.1	1.5	39.43	2.23	2.60
3623	87.1	88.2	1.1	31.20	1.65	2.50
3624	88.2	90.8	2.6	23.31	1.70	3.40
	90.8	93.2	2.4	NOT ASSAYED		
3625	93.2	94.7	1.5	7.20	0.70	1.65
3626	94.7	96.2	1.5	104.92	7.24	9.32
3627	96.2	97.2	1.5	98.74	6.99	12.13
3628	97.2	99.2	1.5	76.80	4.78	10.46
3629	99.2	100.7	1.5	41.49	2.95	5.98
3630	100.7	102.2	1.5	38.40	2.50	4.90
3631	102.2	103.7	1.5	28.11	1.55	2.18
3632	103.7	105.2	1.5	33.26	1.63	3.35
3633	105.2	106.7	1.5	16.11	0.75	1.78
3634	106.7	108.2	1.5	28.11	1.60	3.88
3635	108.2	109.7	1.5	25.37	1.53	3.55
3636	109.7	111.2	1.5	12.00	0.85	2.13
3637	111.2	112.7	1.5	26.40	1.40	3.03
3638 1127	114.2	114.2	1.5	34.29	1.39	4.05
3639 1141	115.7	115.7	1.5	29.14	1.35	3.30
3640 1157	117.2	117.2	1.5	27.43	1.30	1.80
3641	117.2	118.7	1.5	45.26	2.28	5.35
3642	118.7	120.8	2.1	47.31	2.50	4.80
	120.8	133.4	12.6	NOT ASSAYED		
3643	133.4	134.9	1.5	74.74	4.48	10.56
3644	134.9	136.4	1.5	75.77	5.84	10.56
3645	136.4	137.9	1.5	87.77	7.04	12.02
3646	137.9	139.4	1.5	101.83	6.20	14.04
3647	139.4	140.9	1.5	16.11	1.05	2.58
	140.9	141.3	0.4	NOT ASSAYED		
3648	141.3	142.9	1.6	68.43	3.58	8.10

LATITUDE 7N 1089.446  
 DEPARTURE 12W 7714.553  
 ELEVATION 1313.255

DIP AT COLLAR -90°  
 BEARING  
 DEPTH: 144.2 m (473 ft)

76.6 - 79.9 = 3.3 m (11.0 ft) Ag. 38.4 g/t.  
 Pb. 2.96% Zn 5.48%

94.7 - 102.2 = 7.5 m (24.5 ft)

Ag 12.07 g/t.

Pb 4.89%

Zn 8.56%

117.2 - 120.8 = 3.6 m (11.8 ft) Ag. 46.46 g/t  
 Pb. 2.41% Zn 5.03%

133.4 - 142.9 = 9.5 m (31 ft)

Ag 66.92 g/t

Pb 4.49%

Zn 9.22%

→ 142.9 - 144.2 = 1.3 m  $\frac{Ag}{0.00}$   $\frac{Pb}{0.00}$   $\frac{Zn}{0.00}$

E.C.J.

H. 8. 76 - 7. 9. 76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/c	Pb%	Zn%
0.0	144.2	144.2	144.2	0.00	0.00	0.00
END OF HOLE						
NIL						

LATITUDE TN 10,769.359

DIP AT COLLAR - 90°

DEPARTURE Tow. 7,761.970

BEARING

ELEVATION 1307.438

DEPTH. 144.2 m (473 ft)



7.8.76 - 10.8.76

ASSAY	SECTION	CORE	ASSAYS
NUMBER.	FROM (M) TO (M) LENGTH	Ag %	Ph % Zn %
3679	65.7 ✓ 66.4 ✓ 0.7	17.14 ✓ 17.14 ✓ 0.00	1.40 ✓ 0.00 ✓ 0.00
3650	66.4 ✓ 67.9 ✓ 1.5	99.77 ✓ 7.56 ✓ 9.70	4.85 ✓ 9.70 ✓ 9.70
3651	67.9 ✓ 69.4 ✓ 1.5	61.37 ✓ 5.42 ✓ 4.85	4.85 ✓ 4.85 ✓ 4.85
	72.7 ✓ 73.7 ✓ 3.3	NOT ASSAYED	
3652	72.7 ✓ 74.2 ✓ 1.5	143.32 ✓ 11.80 ✓ 10.35	10.35 ✓ 10.35 ✓ 10.35
3653	74.2 ✓ 75.7 ✓ 1.5	135.09 ✓ 10.70 ✓ 8.51	8.51 ✓ 8.51 ✓ 8.51
3654	75.7 ✓ 77.2 ✓ 1.5	247.22 ✓ 17.62 ✓ 10.76	10.76 ✓ 10.76 ✓ 10.76
3655	77.2 ✓ 78.7 ✓ 0.8	146.06 ✓ 10.58 ✓ 9.00	9.00 ✓ 9.00 ✓ 9.00
	84.5 ✓ 84.5 ✓ 6.5	NOT ASSAYED	
3676	84.5 ✓ 86.0 ✓ 1.5	89.83 ✓ 7.42 ✓ 10.61	10.61 ✓ 10.61 ✓ 10.61
3657	86.0 ✓ 87.5 ✓ 1.5	42.51 ✓ 2.90 ✓ 5.15	5.15 ✓ 5.15 ✓ 5.15
	87.5 ✓ 96.6 ✓ 9.1	NOT ASSAYED	
3658	96.6 ✓ 98.1 ✓ 1.5	32.23 ✓ 2.18 ✓ 5.00	5.00 ✓ 5.00 ✓ 5.00
3659	98.1 ✓ 99.6 ✓ 1.5	68.57 ✓ 4.85 ✓ 7.70	7.70 ✓ 7.70 ✓ 7.70
3660	99.6 ✓ 101.3 ✓ 1.7	52.46 ✓ 3.55 ✓ 7.35	7.35 ✓ 7.35 ✓ 7.35
	101.3 ✓ 105.3 ✓ 4.0	NOT ASSAYED	
3661	105.3 ✓ 106.8 ✓ 1.5	48.34 ✓ 2.93 ✓ 4.50	4.50 ✓ 4.50 ✓ 4.50
3662	106.8 ✓ 107.7 ✓ 0.9	57.60 ✓ 4.40 ✓ 6.62	6.62 ✓ 6.62 ✓ 6.62
	107.7 ✓ 148.9 ✓ 41.2	NOT ASSAYED	
3663	148.9 ✓ 150.6 ✓ 1.5	17.14 ✓ 1.20 ✓ 1.35	1.35 ✓ 1.35 ✓ 1.35
	151.7 ✓ 151.7 ✓ 1.1	NOT ASSAYED	
3664	151.7 ✓ 153.1 ✓ 1.4	27.43 ✓ 1.85 ✓ 2.23	2.23 ✓ 2.23 ✓ 2.23
	153.1 ✓ 153.8 ✓ 0.7	NOT ASSAYED	
3665	153.8 ✓ 154.2 ✓ 1.0	86.74 ✓ 6.00 ✓ 10.52	10.52 ✓ 10.52 ✓ 10.52
	154.8 ✓ 157.5 ✓ 2.7	NOT ASSAYED	
3666	157.5 ✓ 159.2 ✓ 1.5	95.66 ✓ 8.80 ✓ 5.66	5.66 ✓ 5.66 ✓ 5.66
3667	159.2 ✓ 160.5 ✓ 1.5	100.80 ✓ 7.76 ✓ 8.17	8.17 ✓ 8.17 ✓ 8.17
3668	160.5 ✓ 162.0 ✓ 1.5	73.71 ✓ 4.95 ✓ 8.07	8.07 ✓ 8.07 ✓ 8.07
3669	162.0 ✓ 163.2 ✓ 1.2	59.31 ✓ 3.95 ✓ 6.84	6.84 ✓ 6.84 ✓ 6.84
3670	163.2 ✓ 163.7 ✓ 0.5	10.97 ✓ 0.63 ✓ 1.68	1.68 ✓ 1.68 ✓ 1.68
3671	163.7 ✓ 165.2 ✓ 1.5	75.77 ✓ 6.20 ✓ 6.40	6.40 ✓ 6.40 ✓ 6.40
3672	165.2 ✓ 167.7 ✓ 1.5	42.51 ✓ 3.55 ✓ 1.90	1.90 ✓ 1.90 ✓ 1.90
3673	167.7 ✓ 168.2 ✓ 1.5	16.11 ✓ 0.70 ✓ 0.18	0.18 ✓ 0.18 ✓ 0.18
3674	168.2 ✓ 171.2 ✓ 3.0	7.89 ✓ 0.15 ✓ 0.18	0.18 ✓ 0.18 ✓ 0.18
3675	171.2 ✓ 174.2 ✓ 3.0	9.94 ✓ 0.43 ✓ 0.40	0.40 ✓ 0.40 ✓ 0.40
3676	174.2 ✓ 175.6 ✓ 1.4	24.34 ✓ 1.80 ✓ 1.18	1.18 ✓ 1.18 ✓ 1.18
3677	175.6 ✓ 178.6 ✓ 3.0	49.37 ✓ 3.88 ✓ 4.35	4.35 ✓ 4.35 ✓ 4.35

(10 ft)

LATITUDE TN 10, 723.122  
 DEPARTURE 68W. 7, 799.058  
 ELEVATION 1301.177

DIP AT COLLAR -90°  
 BEARING  
 DEPTH 196.3m (644ft)

66.4 - 69.4 = 3.0m (10ft) Ag. 80.57 g/t Pb 6.49% Zn 7.28%			
72.7 - 78.0 = 5.3m (17.4ft) Ag 170.8 g/t Pb 12.95% Zn 9.74%	66.4 - 78.0 = 11.6m (38ft) Ag 98.88 g/t Pb 7.59% Zn 6.33%	66.4 - 81.5 = 2.1m (6.9ft) Ag 63.77 g/t Pb 4.91% Zn 4.62%	LOW
84.5 - 87.5 = 3.0m (10ft) Ag 66.17 g/t Pb 5.15% Zn 7.88%			
96.6 - 101.3 = 4.7m (15.4ft) Ag 51.15 g/t Pb 3.37% Zn 6.71%	66.4 - 101.3 = 34.9m (114.5ft) Ag 45.44 g/t Pb 3.42% Zn 3.69%		
105.3 - 107.7 = 2.4m (8ft) Ag 51.81 g/t Pb 3.48% Zn 5.3%	66.4 - 107.7 = 41.3m (135.5ft) Ag 41.41 g/t Pb 3.09% Zn 3.42%		

153.8 - 165.2 = 11.4m (37.5ft) Ag 42.31 g/t Pb 4.62% Zn 5.44%
--

E.C.J.

→ 189.5 - 196.3 = 6.8m Ag 0.00 Pb 0.00 Zn 0.00  
 END OF HOLE



7. 8. 76 - 10. 8. 76

ASSAY NUMBER	SECTION	CORE	FROM (M)	TO (M)	LENGTH	Ag g/t	Pb %	Zn %
4307	169.8	171.3	175.9	4.6	0.00	0.00	0.00	0.00
4306	167.8	169.8	171.3	1.5	5.14	0.05	0.08	0.00
4305	165.3	167.8	171.3	2.0	5.14	0.10	0.18	0.00
4304	159.1	160.6	165.3	4.7	9.94	0.38	0.53	0.00
4303	149.7	153.1	159.1	6.0	18.17	1.25	1.30	0.00
4302	149.0	149.7	153.1	3.4	30.17	2.55	1.48	0.00
4301	146.4	149.0	153.1	2.6	132.00	11.24	6.12	0.00
3700	145.0	146.4	153.1	1.4	62.40	4.70	7.77	0.00
3699	143.4	145.0	153.1	1.6	61.37	3.28	5.40	0.00
3698	141.1	143.4	153.1	2.3	82.63	7.00	7.34	0.00
3697	138.4	141.1	153.1	2.7	71.66	5.90	6.93	0.00
3696	137.2	138.4	153.1	1.2	27.43	1.70	2.45	0.00
3695	137.2	137.2	153.1	1.2	60.34	4.40	5.45	0.00
3694	135.1	137.2	153.1	0.9	21.26	1.35	0.85	0.00
3693	132.8	135.1	153.1	2.3	30.17	2.00	3.13	0.00
3692	76.4	77.2	132.8	55.6	5.14	0.37	0.63	0.00
3691	76.4	76.4	132.8	1.2	41.49	2.88	3.10	0.00
3690	61.6	63.1	132.8	12.1	14.06	0.88	1.45	0.00
3689	58.6	61.6	132.8	3.0	15.09	1.40	1.16	0.00
3688	56.5	58.6	132.8	1.8	73.71	13.30	13.62	0.00
3687	54.5	56.5	132.8	2.0	188.57	12.47	11.27	0.00
3686	52.9	54.5	132.8	1.6	31.20	2.05	2.95	0.00
3685	51.2	52.9	132.8	1.7	211.89	15.27	11.63	0.00
3684	50.6	51.2	132.8	0.6	18.17	1.30	1.68	0.00
3683	49.4	50.6	132.8	1.2	147.09	10.25	10.00	0.00
3682	47.6	49.4	132.8	1.8	212.92	14.68	10.46	0.00
3681	47.6	47.6	132.8	47.6	0.00	0.00	0.00	0.00

END OF HOLE

NOT ASSAYED

NOT ASSAYED

NOT ASSAYED

NOT ASSAYED

NOT ASSAYED

LATITUDE TN  
 DEPARTURE 66W.  
 ELEVATION

DIP AT COLLAR

BEARING  $-90^{\circ}$

DEPTH 175.9 m (577 ft).

$$47.6 - 58.3 = 10.7 \text{ m (35 ft)}$$

Ag 139.31 g/t.

Pb 11.09 %

Zn 9.66 %

$$136.0 - 149.0 = 13.0 \text{ m (42.7 ft)}$$

Ag 78.28 g/t

Pb 6.18 %

Zn 6.19 %

10. 8. 76 - 13. 8. 76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	114.6	114.6	0.00	0.00	0.00
4308	114.6	116.2	1.6	22.29	1.55	2.00
4309	116.2	116.7	0.5	124.12	9.88	9.28
4310	116.7	117.7	1.0	55.54	3.58	2.93
4311	117.7	120.1	2.4	76.80	5.60	7.84
4312	120.1	121.6	1.5	77.83	5.60	7.67
4313	121.6	122.2	0.6	9.94	0.55	1.25
4314	122.2	123.6	1.4	41.49	2.13	5.60
4315	123.6	125.2	1.6	95.66	6.09	9.09
4316	125.2	126.4	1.2	84.69	8.77	6.71
4317	126.4	127.2	0.8	104.92	8.91	6.91
4318	127.2	128.6	1.4	29.14	2.10	2.70
4319	128.6	131.4	2.8	14.06	0.80	0.90
4320	131.4	133.8	2.4	32.23	2.55	2.35
	133.8	137.1	3.3	NOT ASSAYED		
4384	137.1	137.7	0.6	9.94	0.45	1.35
4385	137.7	139.0	1.3	7.89	0.20	0.43
	139.0	154.5	15.5	NOT ASSAYED		
4323	154.5	156.1	1.6	7.89	0.25	0.55

END OF HOLE

LATITUDE 7N  
 DEPARTURE 64W  
 ELEVATION

DIP AT COLLAR - 90°  
 BEARING  
 DEPTH 156.1 m (512 ft).

116.2 - 127.2 = 11.0m (36ft)

Ag 74.67 g/t

Pb 5.66%

Zn 6.71%

11.8.76 - 16.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	95.5	95.5	0.00	0.00	0.00
4322	95.5	97.6	2.1	30.17	2.30	3.86
4323	97.6	98.1	0.5	7.20	0.48	1.05
	98.1	103.0	4.9	NOT ASSAYED		
4324	103.0	104.5	1.5	77.83	4.85	7.00
4325	104.5	106.1	1.6	26.40	1.88	2.88
4326	106.1	107.9	1.8	16.11	1.20	2.08
4327	107.9	110.1	2.2	27.43	1.90	3.90
4328	110.1	112.2	2.1	8.91	0.65	0.98
4329	112.2	114.9	2.7	16.11	1.13	1.78
4330	114.9	118.0	3.1	13.03	0.78	1.03
4331	118.0	120.4	2.4	25.37	1.43	3.48
4332	120.4	121.3	0.9	29.14	1.43	3.52
	121.3	136.2	14.9	0.00	0.00	0.00

END OF HOLE

LATITUDE 95.

DIP AT COLLAR -90°

DEPARTURE 64W.

BEARING.

ELEVATION

DEPTH 136.2m (447 ft).

103.0 - 104.5 = 1.5m (5ft) Ag. 77.83 g/t. Pb 4.85% Zn 7.00%.

(E.C.)

13.8.76 - 16.8.76

ASSAY NUMBER	SECTION		CORE	ASSAYS		
	FROM (M)	TO (M)	LENGTH	Ag g/t	Pb %	Zn %

	0.0	96.9	96.9	0.00	0.00	0.00
--	-----	------	------	------	------	------

END OF HOLE

NIL

LATITUDE 9°N  
 DEPARTURE 70W  
 ELEVATION

DIP AT COLLAR  
 BEARING  
 DEPTH 96.9 m (318 ft)

E.C.J.

14.8.76 - 18.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	121.0	121.0	0.00	0.00	0.00
4333	121.0	122.4	1.4	1.03	0.03	0.08
4334	122.4	123.8	1.4	141.26	7.95	13.01
4335	123.8	124.3	0.5	6.17	0.40	0.65
4336	124.3	125.5	1.2	65.49	4.30	5.78
4337	125.5	127.1	1.6	25.37	1.70	3.53
4338	127.1	128.6	1.5	24.34	1.20	2.58
4339	128.6	130.1	1.5	16.11	1.05	2.63
4340	130.1	131.7	1.6	29.14	1.95	3.90
	131.7	150.0	12.9	0.00	0.00	0.00

END OF HOLE

LATITUDE 8N 10724  
 DEPARTURE <sup>W</sup> 1884.02  
 ELEVATION 1302.871

DIP AT COLLAR. -90°  
 BEARING  
 DEPTH 150 m. (492 ft)

122.4 - 125.5 = 3.1 m (10 ft)  
 Ag. 90.14 g/t. Pb 5.32%  
 Zn. 8.22%

(E.C.J.)

16.8.76 - 19.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
	0.0	85.3	85.3	0.00	0.00	0.00
4362	85.3	86.3	1.0	126.17	8.12	22.41
4363	86.3	87.5	1.2	19.54	4.58	11.77
4364	87.5	88.2	0.7	54.51	3.25	7.42
4365	88.2	89.2	1.0	41.49	3.08	8.94
	89.2	170.1	80.9	0.00	0.00	0.00

END OF HOLE

LATITUDE 14N 11220.13

DIP AT COLLAR -90°

DEPARTURE 84W 7602.36

BEARING

ELEVATION 1317.401

DEPTH 170.1 m (558 ft)

85.3 - 89.2 = 3.9 m (12.8 ft)

Ag 77.24 g/t

Pb 4.86%

Zn 12.99%

18.8.76 - 19.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
	0.0	43.3	43.3	0.00	0.00	0.00
4341	43.3	44.8	1.5	23.31	1.25	0.04
4342	44.8	46.3	1.5	32.32	2.23	2.40
4343	46.3	48.3	2.0	26.40	1.58	3.13
4344	48.3	50.9	2.6	26.40	1.48	3.70
4345	50.9	52.3	1.4	28.11	1.50	3.25
4346	52.3	55.5	3.2	22.29	1.38	3.00
	55.5	55.8	0.3	NOT ASSAYED		
4347	55.8	57.1	1.3	29.14	1.63	4.63
4348	57.1	57.6	0.5	95.66	5.38	11.25
	57.6	59.4	1.8	NOT ASSAYED		
4349	59.4	60.8	1.4	15.09	0.88	3.25
	60.8	68.6	7.8	NOT ASSAYED		
4350	68.6	69.7	1.1	171.43	11.44	17.29
4351	69.7	72.0	2.3	53.49	3.60	5.98
4352	72.0	74.7	2.7	35.31	2.00	4.10
4353	74.7	76.8	2.1	14.06	1.00	1.70
4354	76.8	77.8	1.0	8.91	0.45	1.58
4355	77.8	78.2	0.4	40.46	3.00	5.00
4356	78.2	79.6	1.4	90.86	6.14	11.71
4357	79.6	81.6	2.0	141.26	8.50	15.53
	81.6	82.3	0.7	NOT ASSAYED		
4358	82.3	84.7	2.4	60.34	3.75	5.63
4359	84.7	87.2	2.5	155.32	8.40	12.06
4360	87.2	88.3	1.1	90.86	5.60	7.72
	88.3	88.5	0.2	NOT ASSAYED		
4361	88.5	89.9	1.4	58.63	3.45	6.62
	89.9	93.3	3.4	0.00	0.00	0.00

END OF HOLE

LATITUDE SN. 10894.04

DIP AT COLLAR -90°

DEPARTURE 14W. 7712.47

BEARING

ELEVATION 1312.415

DEPTH 93.3m (306ft)

55.8 - 57.6 = 1.8m (6.0ft) Ag. 47.62 g/t  
 Pb. 3.12% Zn 6.47%

68.6 - 74.7 = 6.1m (20ft) Ag. 66.71 g/t  
 Pb. 4.31%  
 Zn 7.19%

77.8 - 89.9 = 12.1m (38ft)  
 Ag 94.31 g/t  
 Pb 5.60%  
 Zn 9.25%

68.6 - 89.9 = 21.3m (70ft)  
 Ag 74.48 g/t  
 Pb 4.53%  
 Zn 7.55%

20.8.76 - 26.8.76.

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	50.5	50.5	0.00	0.00	0.00
4366	50.5	52.0	1.5	40.46	3.63	3.25
4367	52.0	53.5	1.5	70.63	5.51	2.35
4368	53.5	55.0	1.5	25.37	1.28	0.65
4369	55.0	56.5	1.5	86.74	7.28	4.65
4370	56.5	58.0	1.5	44.23	3.45	3.65
4371	58.0	59.5	1.5	72.69	6.10	5.20
4372	59.5	60.7	1.2	43.54	3.20	2.95
	60.7	90.0	29.3	NOT ASSAYED		
4373	90.0	90.6	0.6	16.11	1.23	2.25
4374	90.6	91.6	1.0	52.46	3.55	4.45
4375	91.6	93.1	1.5	102.86	6.55	11.90
4376	93.1	94.6	1.5	76.80	5.20	9.09
	94.6	98.7	4.1	NOT ASSAYED		
4377	98.7	100.2	1.5	100.80	5.75	7.98
4378	100.2	101.7	1.5	100.80	5.00	8.65
4379	101.7	103.4	1.7	88.80	5.21	9.90
	103.4	154.7	51.3	NOT ASSAYED		
4382	154.7	156.2	1.5	102.86	5.48	3.55
4383	156.2	157.7	1.5	60.34	4.68	7.16
4384	157.7	159.2	1.5	63.43	4.85	6.90
4387	159.2	160.7	1.5	52.46	4.03	6.63
4388	160.7	161.6	0.9	50.40	4.05	6.28
4389	161.6	164.6	3.0	9.94	0.33	3.45
4390	164.6	165.2	0.6	72.69	5.54	4.70
4391	165.2	166.1	0.9	43.54	3.83	5.05
	166.1	197.8	31.7	NOT ASSAYED		
4393	197.8	199.1	1.3	8.91	0.85	0.98
4394	199.1	200.7	1.6	16.11	1.63	1.83
	200.7	242.8	42.1	NOT ASSAYED		
4395	242.8	243.5	0.7	44.23	3.38	2.90
4396	243.5	244.3	0.8	8.23	0.73	0.53
4397	244.3	245.1	0.8	62.40	5.80	4.05
4398	245.1	245.7	0.6	30.17	2.80	2.70
4399	245.7	246.3	0.6	31.20	3.53	3.18
4400	246.3	249.0	2.7	42.51	4.30	3.15
4901	249.0	250.2	1.2	45.26	3.80	3.15
4902	250.2	252.4	2.2	38.40	2.83	2.25
4903	252.4	253.6	1.2	38.40	2.58	1.75
	253.6	267.9	14.3	0.00	0.00	0.00

LATITUDE IN.  
DEPARTURE 68W.  
ELEVATION

DIP AT CONTACT  $-90^\circ$   
BEARING  
DEPTH 267.9 m (879 ft).

$$50.5 - 60.7 = 10.2 \text{ m (33.5 ft)}$$

Ag 55.14 g/t.

Pb 4.38%

Zn 3.25%

$$90.6 - 94.6 = 4.0 \text{ m (13 ft)} \text{ Ag. } 80.49 \text{ g/t.}$$

Pb 5.29%

Zn 8.98%

$$90.6 - 103.4 = 12.8 \text{ m (42 ft)}$$

Ag 60.57 g/t

Pb 3.61%

Zn 6.07%

$$98.1 - 103.4 = 4.7 \text{ m (15.4 ft)} \text{ Ag. } 96.46 \text{ g/t}$$

Pb 5.32%

Zn 8.89%

$$154.7 - 166.1 = 11.4 \text{ m (37 ft)}$$

Ag 50.58 g/t.

Pb 3.51%

Zn 5.24%

$$244.3 - 250.2 = 5.9 \text{ m (19.5 ft)}$$

Ag 43.36 g/t

Pb 4.17%

Zn 3.23%

(E.C.I.)

20.8.76 - 3.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	140.5	140.5	0.00	0.00	0.00
4392	140.5	141.8	1.3	46.29	3.90	6.88
	141.8	145.2	3.4	NOT ASSAYED		
4904	145.2	145.9	0.7	12.00	0.68	0.95
4905	145.9	148.3	2.4	64.46	3.85	5.15
	148.3	168.2	19.9	0.00	0.00	0.00
END OF HOLE						

LATITUDE 9N 10764.164

DIP AT COLLAR -90°

DEPARTURE 68W. 7840.884

BEARING

ELEVATION 1306.31

DEPTH 168.2 m (552 ft).

140.5 - 141.8 = 1.3m (4.3ft) Ag. 46.29g/t. Pb. 3.90%.

Zn 6.88%

145.9 - 148.3 = 2.4m (8.0ft) Ag. 64.46g/t. Pb. 3.85%.

Zn 5.15%

26.8.76 - 28.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
4906	0.0	41.8	41.8	0.00	0.00	0.00
	41.8	43.3	1.5	10.97	0.83	0.88
	43.3	48.0	4.7	NOT ASSAYED		
4907	48.0	50.3	2.3	156.34	11.08	13.39
	50.3	78.3	28.0	NOT ASSAYED		
4908	78.3	79.6	1.3	15.09	0.83	0.98
4909	79.6	81.1	1.5	41.49	2.83	3.75
4910	81.1	83.1	2.0	55.54	4.53	5.89
	83.1	86.1	3.0	0.00	0.00	0.00

END OF HOLE

LATITUDE 1°  
 DEPARTURE 18W.  
 ELEVATION

DIP AT COLLAR -90°  
 BEARING  
 DEPTH 86.1m (282.5ft).

48.0 - 50.3 = 2.3m (7.5ft) Ag. 156.34g/t  
 Pb. 11.08% Zn 13.39%

79.6 - 83.1 = 3.5m (11.5ft) Ag. 49.52g/t  
 Pb 3.80% Zn 4.97%

ECJ.

27.8.76 - 29.8.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag 3/t	Pb%	Zn%
	0.0	149.4	149.4	0.00	0.00	0.00

END OF HOLE

NIL.

LATITUDE 14N

DIP AT COLLAR -90°

DEPARTURE 92W

BEARING

ELEVATION

DEPTH 149.4 m (490 ft).

ASSAY NUMBER	SECTION	Core	From (m)	To (m)	Length	Ag g/t	Pb %	Zn %
4911			43.3	43.3	0.0	0.00	0.00	8.00
			43.3	44.7	1.4	34.29	1.55	3.58
			46.7	77.7	31.0	NOT ASSAYED		
4912			77.7	79.5	1.8	6.17	0.40	0.43
			79.5	82.0	2.5	NOT ASSAYED		
4913			82.0	84.0	2.0	10.97	0.68	1.38
4914			84.0	85.4	1.4	9.94	0.80	0.95
			85.4	89.0	3.6	NOT ASSAYED		
4915			89.0	90.4	1.4	8.91	0.70	1.18
			90.4	96.9	6.5	NOT ASSAYED		
4916			96.9	98.4	1.5	10.97	0.50	1.00
4917			98.4	99.9	1.5	19.20	0.68	1.90
4918			99.9	101.4	1.5	33.26	1.98	3.60
4919			101.4	102.9	1.5	47.31	2.93	4.85
4920			102.9	104.4	1.5	14.06	0.38	1.05
4921			104.4	105.9	1.5	9.94	0.38	0.75
4922			105.9	107.0	1.1	14.06	0.78	1.63
4923			107.0	107.9	0.9	3.09	0.25	1.13
			107.9	136.2	28.3	NOT ASSAYED		
4924			136.2	137.8	1.6	3.09	0.22	0.53
			137.8	146.9	9.1	NOT ASSAYED		
4925			146.9	148.4	1.5	8.91	0.45	0.80
4926			148.4	150.0	1.6	6.17	0.40	0.35
4927			150.0	151.5	1.5	3.09	0.10	0.28
4928			151.5	153.0	1.5	8.91	0.55	1.05
4929			153.0	154.5	1.5	5.14	0.26	0.45
			154.5	159.0	4.5	NOT ASSAYED		
4930			159.0	160.7	1.7	3.09	0.07	0.20
4931			160.7	161.8	1.1	5.14	0.03	0.30
4932			161.8	163.4	1.6	2.06	0.05	0.25
4933			163.4	164.9	1.5	5.14	0.08	0.18
4934			164.9	166.4	1.5	7.20	0.05	0.70
4935			166.4	168.2	1.8	7.20	0.15	0.68
4936			168.2	169.8	1.6	44.23	3.25	5.00
4937			169.8	170.7	0.9	34.29	1.95	2.40
			170.7	171.8	1.1	NOT ASSAYED		
4939			171.8	172.8	1.0	49.03	4.05	7.39
4940			172.8	174.3	1.5	18.17	0.90	1.65
4938			174.3	175.9	1.6	32.23	1.43	2.73
			175.9	184.4	8.5	NOT ASSAYED		

LATITUDE 3N.  
 DEPARTURE 68W.  
 ELEVATION

DIP AT CORNER - 90°  
 BEARING  
 DEPTH 184.4 m (605 ft)

$$101.4 - 102.9 = 1.5 \text{ m (6 ft)}$$

Ag 17.31 g/t. Pb 2.93%. Zn 4.85%.

$$168.2 - 172.8 = 4.6 \text{ m (15 ft)}$$

Ag 32.75 g/t.

Pb 2.39 %

Zn 3.82 %

LOW

E.C.J.

30.8.76 - 1.9.76

ASSAY	SECTION		CORE	ASSAYS		
NUMBER	FROM (M)	TO (M)	LENGTH	Ag g/t	Pb %	Zn %

	0.0	113.7	113.7	0.00	0.00	0.00
--	-----	-------	-------	------	------	------

END OF HOLE

NW

LATITUDE 13N

DIP AT COLLAR -90°

DEPARTURE 92W

BEARING

ELEVATION

DEPTH 113.7m (373 ft).

(E.C.J.)

31.8.76 - 4.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
4941	0.0 ✓	153.3 ✓	153.3 ✓	0.00	0.00	0.00
	153.3 ✓	154.9 ✓	1.6 ✓	54.52	2.93	3.65
	154.9 ✓	160.8 ✓	5.9 ✓	NOT ASSAYED		
4942	160.8 ✓	162.5 ✓	1.7 ✓	51.43	3.90	4.20
4943	162.5 ✓	164.0 ✓	1.5 ✓	87.77	6.05	6.70
4944	164.0 ✓	165.5 ✓	1.5 ✓	76.80	6.01	6.36
4945	165.5 ✓	167.0 ✓	1.5 ✓	95.66	7.58	5.58
4946	167.0 ✓	168.6 ✓	1.6 ✓	82.63	5.92	7.95
4947	168.6 ✓	170.1 ✓	1.5 ✓	9.94	0.35	0.48
4948	170.1 ✓	173.1 ✓	3.0 ✓	6.17	0.09	0.07
4949	173.1 ✓	176.6 ✓	3.5 ✓	7.20	0.22	0.33
4950	176.6 ✓	179.6 ✓	3.0 ✓	26.40	1.65	1.13
4951	179.6 ✓	181.7 ✓	2.1 ✓	9.94	0.55	0.75
4952	181.7 ✓	184.8 ✓	3.1 ✓	6.17	0.30	0.38
4953	184.8 ✓	186.8 ✓	2.0 ✓	9.94	0.48	0.93
4954	186.8 ✓	187.8 ✓	1.0 ✓	3.09	0.10	0.13
	187.8 ✓	198.4 ✓	10.6 ✓	0.00	0.00	0.00

END OF HOLE

LATITUDE SN 10,598.140  
 DEPARTURE b4w 7,848.417  
 ELEVATION 1295.182 ~

DIP AT COLLAR - 90°  
 BEARING  
 DEPTH 198.4 m (651 ft)

$$160.8 - 168.6 = 7.8 \text{ m (25.6 ft)}$$

Ag 78.20 g/t

Pb 5.84 %

Zn 6.18 %

E.C.J.

1.9.76 - 4.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	From (m)	To (m)		Ag %	Pb %	Zn %
	0.0	150.0	150.0	0.00	0.00	0.00
END OF HOLE						
NIL						

LATITUDE 13 N  
 DEPARTURE 88 W.  
 ELEVATION

DIP AT CORNER -90°  
 BEARING  
 DEPTH 150.0 m (492 ft).

E.C.J.

4.9.76 - 6.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	110.2	110.2	0.00	0.00	0.00
4962	110.2	112.4	2.2	8.91	0.50	0.75
4963	112.4	113.4	1.0	80.57	4.15	9.05
4964	113.4	115.2	1.8	33.26	1.80	3.35
	115.2	122.5	7.3	NOT ASSAYED		
4969	122.5	123.4	0.9	21.26	1.40	2.65
4970	123.4	124.9	1.5	48.34	3.15	7.42
4971	124.9	126.0	1.1	6.17	0.34	0.60
126.0	129.9	129.9	3.9	NOT ASSAYED		
4972	129.9	133.2	3.3	24.34	1.70	2.53
	133.2	145.4	12.2	0.00	0.00	0.00

END OF HOLE

LATITUDE 12N  
 DEPARTURE 88W  
 ELEVATION

DIP AT COLLAR -90°  
 BEARING  
 DEPTH 145.4 m (477 ft).

(E.C.)


4.9.76 - 6.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM	TO		Ag g/t	Pb %	Zn %
4955	0.0	46.1	46.1	0.00	0.00	0.00
4956	46.1	47.7	1.6	19.20	0.96	1.48
51 →	47.7	50.7	3.0	20.23	0.58	0.88
	50.7	146.3	95.6	NOT ASSAYED		
4958	146.3	147.8	1.5	30.17	1.80	2.72
4959	147.8	149.3	1.5	35.31	2.15	4.09
4960	149.3	150.1	0.8	26.40	1.63	2.50
	150.1	179.2	29.1	NOT ASSAYED		
4961	179.2	180.3	1.1	26.40	2.10	2.84
	180.3	200.6	20.3	NOT ASSAYED		
4965	200.6	202.1	1.5	25.37	1.83	1.56
4966	202.1	203.1	1.0	9.94	0.25	0.24
4967	203.1	204.1	1.0	10.97	0.30	0.35
4968	204.1	206.1	1.9	60.34	4.10	4.95
	206.1	209.2	3.1	0.00	0.00	0.00
(E.C.)	0.0	46.1	46.1	0.00	0.00	0.00
4955	46.1	47.7	1.6	19.20	0.96	1.48
4956	47.7	50.7	3.0	20.23	0.58	0.88
	50.7	106.7	56.0	0.00	0.00	0.00
4957	106.7	108.2	1.5	4.11	0.02	0.26
	108.2	146.3	38.1	0.00	0.00	0.00
4958	146.3	147.8	1.5	30.17	1.80	2.72
4959	147.8	149.3	1.5	35.31	2.15	4.09
4960	149.3	150.1	0.8	26.40	1.63	2.50
	150.1	179.2	29.1	0.00	0.00	0.00
4961	179.2	180.3	1.1	26.40	2.10	2.84
	180.3	200.6	20.3	0.00	0.00	0.00
4965	200.6	202.1	1.5	25.37	1.83	1.56
4966	202.1	203.1	1.0	9.94	0.25	0.24
4967	203.1	204.1	1.0	10.97	0.30	0.35
4968	204.1	206.1	1.9	60.34	4.10	4.95
	206.1	209.2	3.1	0.00	0.00	0.00

END OF HOLE

LATITUDE 3N 10,552.831.  
 DEPARTURE 64W, 7805.692  
 ELEVATION 1287.924

DIP AT COLLAR -90°  
 BEARING  
 DEPTH 209.2m (686ft)

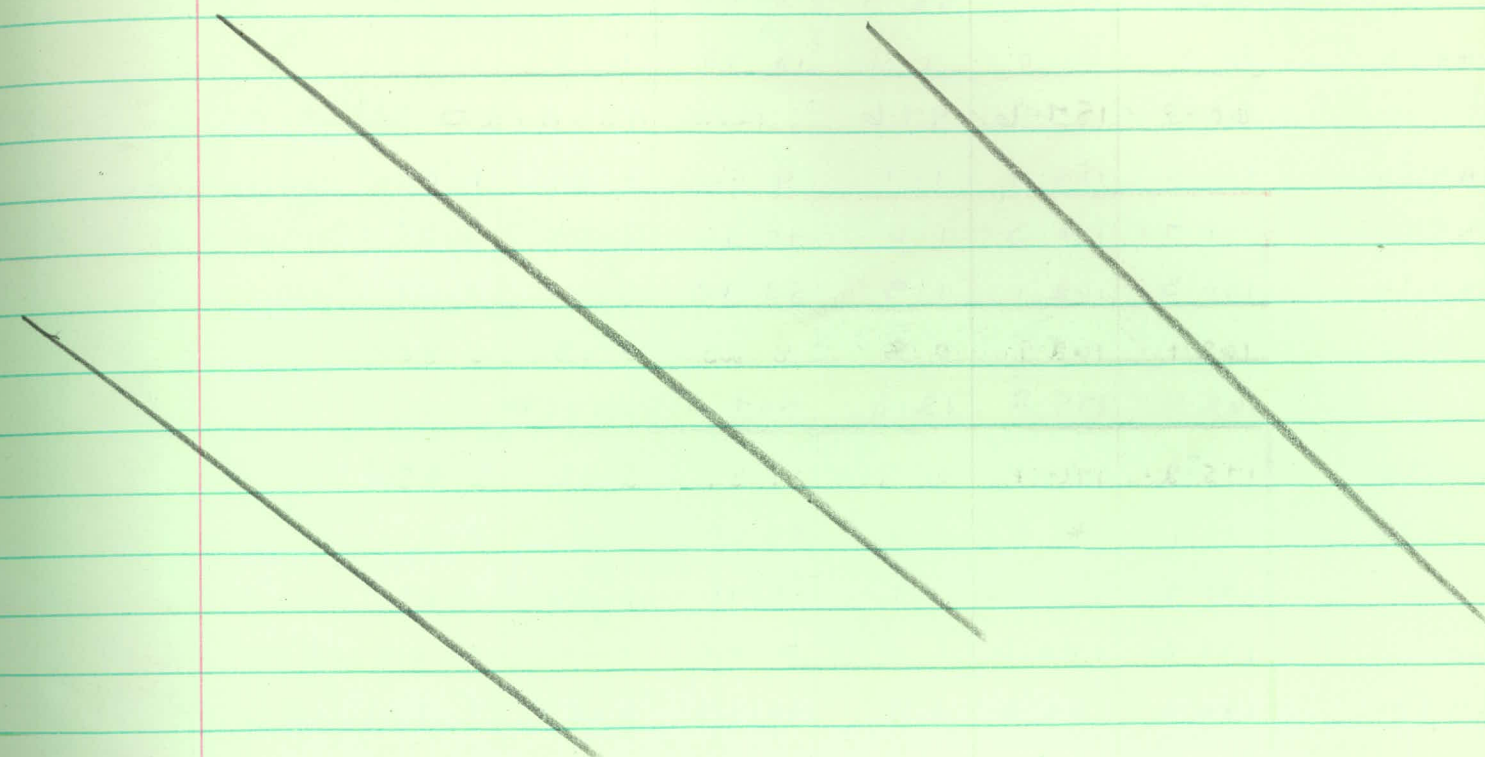

147.8 - 149.3 = 1.5m (5ft) Ag, 35.31 g/t  
 Pb 2.15% Zn 4.09%

LOW

204.1 - 206.1 = 1.9m (6.2ft) Ag, 60.34 g/t  
 Pb 4.10% Zn 4.95%

ASSAY SECTION CORE  
 NUMBER / (From / (m) LENGTH Kg g/t Pb% Zn%  
 ASSAYS

0.0 / 58.3 / 58.3 / 0.00 / 0.00 / 0.00

58.3 / 60.2 / 1.7 / 15.09 / 1.18 / 1.40

60.0 / 157.6 / 97.6 / NOT ASSAYED

157.6 / 158.7 / 1.1 / 9.94 / 0.60 / 1.08

158.7 / 160.3 / 1.6 / 40.46 / 2.28 / 4.05

160.3 / 162.1 / 1.8 / 58.63 / 3.80 / 7.57

162.1 / 162.9 / 0.8 / 8.23 / 0.48 / 0.80

162.9 / 175.2 / 12.3 / NOT ASSAYED

175.2 / 176.1 / 0.9 / 37.37 / 3.33 / 2.85

176.1 / 177.9 / 1.8 / 96.69 / 9.85 / 9.31

177.9 / 179.6 / 1.7 / 73.71 / 5.50 / 7.47

179.6 / 180.6 / 1.0 / 0.00 / 0.00 / 0.00

180.6 / 182.0 / 1.4 / 70.63 / 6.59 / 5.30

182.0 / 183.5 / 1.5 / 16.11 / 1.70 / 1.63

183.5 / 185.0 / 1.5 / 22.29 / 2.38 / 1.45

185.0 / 186.5 / 1.5 / 138.17 / 13.79 / 4.65

186.5 / 188.0 / 1.5 / 73.71 / 5.00 / 7.06

188.0 / 188.8 / 0.8 / 45.26 / 3.38 / 6.26

188.8 / 190.3 / 1.5 / 8.91 / 0.32 / 0.75

190.3 / 191.8 / 1.5 / 14.06 / 1.03 / 1.25

191.8 / 192.5 / 0.7 / 17.14 / 0.62 / 1.13

192.5 / 194.0 / 1.5 / 6.17 / 0.15 / 0.10

194.0 / 197.2 / 3.2 / 7.86 / 0.38 / 0.60

197.2 / 199.9 / 2.7 / 20.23 / 1.50 / 2.13

199.9 / 200.6 / 0.7 / 12.00 / 0.88 / 0.98

200.6 / 201.8 / 1.2 / 45.26 / 3.10 / 2.45

201.8 / 203.0 / 1.2 / 17.14 / 1.33 / 1.78

203.0 / 206.0 / 3.0 / 13.03 / 0.63 / 0.68

206.0 / 207.5 / 1.5 / 7.20 / 0.38 / 0.48

207.5 / 209.0 / 1.5 / 22.29 / 1.35 / 1.23

209.0 / 209.6 / 0.6 / 25.37 / 1.43 / 1.98

209.6 / 210.9 / 1.3 / 0.00 / 0.00 / 0.00

210.9 / 212.4 / 1.5 / 14.06 / 1.00 / 0.73

212.4 / 218.5 / 6.1 / 0.00 / 0.00 / 0.00

END OF HOLE

LATITUDE	SN 10680.107.	DIP AT COLLAR	
DEPARTURE	18W. 7758.805	BEARING	-90°
ELEVATION	1297.222	DEPTH	218.5m (717 ft)

158.7 - 162.1 = 3.4m (11 ft) Ag. 50.08 g/t  
 Pb 3.08% Zn 5.91%

175.2 - 188.8 = 13.6m (44.6 ft)

Ag 59.36 g/t.

Pb 5.41%

Zn 4.90%

E.O.J.

9.9.76 - 10.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	From (m)	To (m)		Ag g/t	Pb %	Zn %
<del>233 B</del>	<del>0.0</del>	<del>118.7</del>	<del>118.7</del>	<del>0.00</del>	<del>0.00</del>	<del>0.00</del>
<del>233 B</del>	<del>118.7</del>	<del>120.2</del>	<del>1.5</del>	<del>6.17</del>	<del>0.50</del>	<del>1.58</del>
<del>233 B</del>	<del>120.2</del>	<del>121.9</del>	<del>1.7</del>	<del>0.00</del>	<del>0.00</del>	<del>0.00</del>
<del>234 B</del>	<del>121.9</del>	<del>124.4</del>	<del>2.5</del>	<del>48.34</del>	<del>2.70</del>	<del>4.70</del>
<del>234 B</del>	<del>124.4</del>	<del>127.6</del>	<del>3.2</del>	<del>0.00</del>	<del>0.00</del>	<del>0.00</del>
<del>235 B</del>	<del>127.6</del>	<del>129.2</del>	<del>1.6</del>	<del>28.11</del>	<del>1.23</del>	<del>2.63</del>
<del>235 B</del>	<del>129.2</del>	<del>130.8</del>	<del>1.6</del>	<del>0.00</del>	<del>0.00</del>	<del>0.00</del>
<del>236 B</del>	<del>130.8</del>	<del>132.3</del>	<del>1.5</del>	<del>36.34</del>	<del>1.50</del>	<del>3.18</del>
<del>237 B</del>	<del>132.3</del>	<del>134.0</del>	<del>1.7</del>	<del>36.34</del>	<del>2.08</del>	<del>4.85</del>
<del>237 B</del>	<del>134.0</del>	<del>134.9</del>	<del>0.9</del>	<del>0.00</del>	<del>0.00</del>	<del>0.00</del>
<del>238 B</del>	<del>134.9</del>	<del>135.5</del>	<del>0.6</del>	<del>106.97</del>	<del>6.72</del>	<del>17.95</del>
<del>238 B</del>	<del>135.5</del>	<del>136.8</del>	<del>1.3</del>	<del>0.00</del>	<del>0.00</del>	<del>0.00</del>
<del>239 B</del>	<del>136.8</del>	<del>138.2</del>	<del>1.4</del>	<del>32.26</del>	<del>2.08</del>	<del>3.65</del>
<del>240 B</del>	<del>138.2</del>	<del>139.6</del>	<del>1.4</del>	<del>12.00</del>	<del>1.15</del>	<del>2.75</del>

231 B	0.0	72.5	72.5	0.00	0.00	0.00
231 B	72.5	74.0	1.5	9.94	0.98	1.50
232 B	74.0	76.0	2.0	23.31	2.15	1.85
233 B	76.0	118.7	42.7	0.00	0.00	0.00
233 B	118.7	120.2	1.5	6.17	0.50	1.58
233 B	120.2	121.9	1.7	0.00	0.00	0.00
234 B	121.9	124.4	2.5	48.34	2.70	4.70
234 B	124.4	127.6	3.2	0.00	0.00	0.00
235 B	127.6	129.2	1.6	28.11	1.23	2.63
235 B	129.2	130.8	1.6	0.00	0.00	0.00
236 B	130.8	132.3	1.5	36.34	1.50	3.18
237 B	132.3	134.0	1.7	36.34	2.08	4.85
237 B	134.0	134.9	0.9	0.00	0.00	0.00
238 B	134.9	135.5	0.6	106.97	6.72	17.95
238 B	135.5	136.8	1.3	0.00	0.00	0.00
239 B	136.8	138.2	1.4	32.26	2.08	3.65
240 B	138.2	139.6	1.4	12.00	1.15	2.75

END OF HOLE

LATITUDE 12N 11209.436  
 DEPARTURE 86W 7516.514  
 ELEVATION 1321.348  
 DIP AT COLLAR -90°  
 BEARING  
 DEPTH 139.6 m (458 ft)

130.8 - 135.5 = 4.7 m (15 ft)  
 Ag 38.4 g/t  
 Pb 2.09 %  
 Zn 5.06 %

121.9 - 124.4 = 2.5 m (8.2 ft)  
 Ag 48.34 g/t  
 Pb 2.70 %  
 Zn 4.70 %

130.8 - 135.5 = 4.7 m (15 ft)  
 Ag 38.4 g/t  
 Pb 2.09 %  
 Zn 5.06 %

E.C.J.

TDDH 155

11.9.76 - 12.9.76

ASSAY NUMBER	SECTION		CORE LENGTH (M)	ASSAYS		
	FROM	TO		Ag g/t	Pb %	Zn %
	0.0	41.8	41.8	0.00	0.00	0.00
241 B	41.8	44.0	2.2	33.26	1.93	3.88
242	44.0	45.5	1.5	60.34	3.95	8.34
243	45.5	47.0	1.5	50.40	3.16	5.71
244	47.0	48.5	1.5	46.29	2.95	5.54
245	48.5	50.0	1.5	42.51	2.98	4.55
246	50.0	51.5	1.5	35.31	2.38	4.75
247	51.5	53.7	2.2	51.43	3.40	7.66
248	53.7	54.1	0.4	61.37	3.45	5.72
56.9	54.1	56.9	2.8	0.00	0.00	0.00
249 ?	56.9	58.8	1.9	54.51	3.40	6.12
250	58.8	60.7	1.9	66.51	4.48	7.74
251	60.7	62.2	1.5	28.11	2.10	2.80
252	62.2	65.2	3.0	25.37	1.78	2.50
253	65.2	68.2	3.0	14.06	0.95	1.38
254	68.2	69.7	1.5	18.17	1.06	1.73
255	69.7	71.2	1.5	60.34	4.09	5.05
	71.2	74.9	3.7	0.00	0.00	0.00
256	74.9	76.4	1.5	7.89	0.39	0.59
257	76.4	77.2	0.8	37.37	3.60	1.67
258	77.2	78.7	1.5	92.92	6.08	10.92
259	78.7	80.2	1.5	97.72	6.50	10.68
260	80.2	81.7	1.5	181.37	10.75	17.14
	81.7	83.8	2.1	0.00	0.00	0.00
261	83.8	84.9	1.1	40.46	2.13	4.13
	84.9	85.4	0.5	0.00	0.00	0.00
262	85.4	87.2	1.8	48.34	2.94	6.19
	87.2	94.5	7.3	0.00	0.00	0.00

END OF HOLE

LATITUDE 10N  
DEPARTURE 10W  
ELEVATION

DIP AT COLLAR -90°  
BEARING  
DEPTH 94.5m (310ft)

44.0 - 54.1 = 10.1 m (33 ft)

Ag 48.51 g/t

Pb 3.17 %

Zn 6.19 %

44.0 - 71.2 = 27.2 m (89 ft)

Ag 36.70 g/t

Pb 2.43 %

Zn 4.22 %

LOW

59.9 - 71.2 = 11.3 m (37 ft)

Ag 44.97 g/t

Pb 3.10 %

Zn 4.63 %

LOW

44.0 - 87.2 = 43.2 m (142 ft)

Ag 39.07 g/t

Pb 2.52 %

Zn 4.37 %

77.2 - 87.2 = 10.0 m (33 ft)

Ag 68.95 g/t

Pb 4.26 %

Zn 7.38 %

12.9.76 ~ 16.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb%	Zn%
	0.0 ✓	85.0 ✓	85.0	0.00	0.00	0.00
263 B	85.0 ✓	86.5 ✓	1.5	45.26 ✓	3.12 ✓	5.30 ✓
264	86.5 ✓	88.0 ✓	1.5	36.34 ✓	2.50 ✓	3.70 ✓
265	88.0 ✓	88.6 ✓	0.6	28.11 ✓	2.05 ✓	3.40 ✓
	88.6 ✓	91.3 ✓	2.7	0.00	0.00	0.00
266	91.3 ✓	92.4 ✓	1.1	18.17 ✓	1.38 ✓	2.25 ✓
	92.4 ✓	94.7 ✓	2.3	0.00	0.00	0.00
267	94.7 ✓	96.2 ✓	1.5	24.34 ✓	1.78 ✓	2.13 ✓
268	96.2 ✓	99.2 ✓	3.0	17.14 ✓	1.28 ✓	2.15 ✓
269	99.2 ✓	100.3 ✓	0.9	28.11 ✓	1.88 ✓	2.38 ✓
270	100.3 ✓	101.7 ✓	1.4	52.46 ✓	3.70 ✓	4.55 ✓
271	101.7 ✓	103.2 ✓	1.5	70.63 ✓	4.52 ✓	6.17 ✓
272	103.2 ✓	104.7 ✓	1.5	69.60 ✓	3.81 ✓	6.78 ✓
	104.7 ✓	106.1 ✓	1.4	0.00	0.00	0.00
273	106.1 ✓	107.4 ✓	1.3	36.34 ✓	2.18 ✓	4.15 ✓
274	107.4 ✓	108.9 ✓	1.5	18.17 ✓	1.23 ✓	2.78 ✓
275	108.9 ✓	110.4 ✓	1.5	29.14 ✓	1.75 ✓	2.95 ✓
276	110.4 ✓	111.9 ✓	1.5	55.54 ✓	4.07 ✓	4.50 ✓
277	111.9 ✓	113.4 ✓	1.5	61.37 ✓	4.45 ✓	5.30 ✓
278	113.4 ✓	114.9 ✓	1.5	62.40 ✓	3.80 ✓	5.10 ✓
279	114.9 ✓	116.4 ✓	1.5	77.83 ✓	5.10 ✓	7.21 ✓
280	116.4 ✓	118.9 ✓	2.5	51.43 ✓	3.59 ✓	6.05 ✓
281	118.9 ✓	120.0 ✓	1.1	7.89 ✓	0.68 ✓	0.65 ✓
	120.0 ✓	121.0 ✓	1.0	0.00	0.00	0.00
282	121.0 ✓	122.5 ✓	1.5	13.03 ✓	1.10 ✓	0.76 ✓
283	122.5 ✓	124.1 ✓	1.6	27.43 ✓	1.95 ✓	2.54 ✓
284	124.1 ✓	125.6 ✓	1.5	41.49 ✓	2.49 ✓	6.05 ✓
285	125.6 ✓	127.1 ✓	1.5	50.40 ✓	2.75 ✓	6.78 ✓
286	127.1 ✓	128.6 ✓	1.5	32.23 ✓	1.93 ✓	4.17 ✓
287	128.6 ✓	130.1 ✓	1.5	47.31 ✓	2.78 ✓	6.65 ✓
288	130.1 ✓	130.6 ✓	0.5	36.34 ✓	2.08 ✓	5.84 ✓
	130.6 ✓	132.6 ✓	2.0	0.00	0.00	0.00

CONTINUED ON PAGES  
182 & 183.

ASSAY NUMBER

DDH RISE Continued.

SECTION COKE

FROM (M) / 10 (M) LENGTH

Ag g/t Pb % Zn %

137.3 / 138.8 / 1.5 / 49.03 / 3.33 / 4.80

135.3 / 137.3 / 2.0 / 45.26 / 3.03 / 4.90

138.8 / 140.3 / 1.5 / 43.54 / 2.63 / 3.85

140.3 / 141.8 / 1.5 / 29.14 / 1.68 / 3.95

141.8 / 143.3 / 1.5 / 25.37 / 1.48 / 3.15

143.3 / 146.3 / 3.0 / 24.34 / 1.38 / 2.18

146.3 / 148.3 / 2.0 / 24.34 / 1.78 / 1.63

148.3 / 150.0 / 1.7 / 25.37 / 1.68 / 2.00

150.0 / 154.9 / 4.9 / 30.17 / 2.10 / 3.00

154.9 / 157.9 / 3.0 / 25.37 / 1.48 / 2.80

157.9 / 158.5 / 0.6 / 8.23 / 0.62 / 1.53

167.6 / 169.1 / 1.5 / 8.91 / 0.43 / 1.28

169.1 / 170.7 / 1.1 / 62.40 / 2.63 / 9.05

170.7 / 172.3 / 1.6 / 0.00 / 0.00 / 0.00

172.3 / 172.8 / 0.5 / 80.57 / 4.70 / 10.66

173.8 / 173.7 / 0.9 / 44.23 / 3.28 / 7.45

174.3 / 174.3 / 0.6 / 22.29 / 1.63 / 2.70

174.3 / 175.4 / 1.1 / 62.40 / 3.28 / 8.29

175.4 / 176.9 / 1.5 / 25.46 / 2.13 / 2.90

176.9 / 194.1 / 17.2 / 0.00 / 0.00 / 0.00

ASSAYS

Ag g/t Pb % Zn %

135.3 - 138.8 = 3.5m

Ag 41.58 g/t Pb 2.24 % Zn 5.91 %

169.1 - 175.4 = 6.3m (21ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

Ag 49.28 g/t Pb 2.98 % Zn 5.25 %

197.2 - 200.3 = 3.1m (10ft)

TDH A 157

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	32.6	32.6	0.00	0.00	0.00
514 B	32.6	34.1	1.5	49.37	3.78	2.85
	34.1	67.6	33.5	0.00	0.00	0.00
515	67.6	70.7	3.1	13.03	1.00	0.60
516	70.7	72.2	1.5	20.23	1.05	0.95
517	72.2	73.6	1.4	35.31	2.78	1.10
518	73.6	75.1	1.5	30.17	2.18	1.25
519	75.1	76.6	1.5	52.46	4.15	4.30
520	76.6	77.8	1.2	8.23	0.60	0.93
	77.8	104.6	26.8	0.00	0.00	0.00
521	104.6	107.7	3.1	13.03	0.58	0.45
	107.7	110.3	2.6	0.00	0.00	0.00
522	110.3	111.9	1.6	8.23	0.15	0.18
	111.9	116.5	4.6	0.00	0.00	0.00
523	116.5	118.0	1.5	9.94	0.15	0.20
524	118.0	118.9	0.9	15.09	0.60	0.38
525	118.9	120.8	1.9	12.69	5.96	5.03
	120.8	<del>158.5</del> 155.4	34.6	0.00	0.00	0.00

END OF HOLE

LATITUDE IS 10506.970

DIP AT COLLAR -90°

DEPARTURE 466.7677.261.

BEARING

ELEVATION 1284.510

DEPTH ~~158.5~~ 155.4 (510 ft)

16.9.76 - 18.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0 ✓	17.7 ✓	17.7	0.00	0.00	0.00
S26 B	17.7 ✓	18.6 ✓	0.9	150.17 ✓	7.69 ✓	9.08 ✓
S27	18.6 ✓	20.1 ✓	1.5	118.97 ✓	7.51 ✓	13.33 ✓
S28	20.1 ✓	21.3 ✓	1.2	53.49 ✓	3.43 ✓	5.99 ✓
S29	21.3 ✓	23.8 ✓	2.5	52.46 ✓	2.60 ✓	6.20 ✓
	23.8 ✓	49.4 ✓	25.6	0.00	0.00	0.00
S30	49.4 ✓	51.4 ✓	2.0	32.23 ✓	1.80 ✓	4.50 ✓
S31	51.4 ✓	53.5 ✓	2.1	44.23 ✓	2.58 ✓	5.69 ✓
	53.5 ✓	65.2 ✓	11.7	0.00	0.00	0.00
S32	65.2 ✓	65.5 ✓	0.3	87.77 ✓	4.58 ✓	11.42 ✓
	65.5 ✓	67.5 ✓	2.0	0.00	0.00	0.00
S33	67.5 ✓	68.5 ✓	1.0	46.29 ✓	2.50 ✓	6.24 ✓
	68.5 ✓	69.0 ✓	0.5	0.00	0.00	0.00
S34	69.0 ✓	70.5 ✓	1.5	48.34 ✓	2.68 ✓	6.96 ✓
S35	70.5 ✓	71.0 ✓	0.5	36.34 ✓	2.30 ✓	7.45 ✓
	71.0 ✓	91.2 ✓	20.2	0.00	0.00	0.00
S36	91.2 ✓	92.7 ✓	1.5	37.37 ✓	2.53 ✓	4.70 ✓
S37	92.7 ✓	94.2 ✓	1.5	36.34 ✓	2.20 ✓	4.45 ✓
	94.2 ✓	96.5 ✓	2.3	0.00	0.00	0.00
S38	96.5 ✓	98.0 ✓	1.5	43.54 ✓	2.55 ✓	5.65 ✓
S39	98.0 ✓	99.5 ✓	1.5	30.17 ✓	1.95 ✓	3.83 ✓
S40	99.5 ✓	101.0 ✓	1.5	36.34 ✓	2.10 ✓	4.43 ✓
S41	101.0 ✓	101.8 ✓	0.8	38.40 ✓	2.48 ✓	4.68 ✓
	101.8 ✓	102.7 ✓	0.9	0.00	0.00	0.00
S42	102.7 ✓	103.2 ✓	0.5	25.37 ✓	1.93 ✓	3.90 ✓
	103.2 ✓	104.0 ✓	0.8	0.00	0.00	0.00
S43	104.0 ✓	106.7 ✓	2.7	23.31 ✓	1.25 ✓	4.05 ✓
	106.7 ✓	110.8 ✓	4.1	0.00	0.00	0.00
S44	110.8 ✓	112.7 ✓	1.9	78.86 ✓	4.68 ✓	5.54 ✓
S45	112.7 ✓	114.6 ✓	1.9	129.26 ✓	7.25 ✓	11.76 ✓
	114.6 ✓	115.8 ✓	1.2	0.00	0.00	0.00

CONTINUED ON  
PAGES 188 . 189.

LATITUDE 9N  
 DEPARTURE 48W  
 ELEVATION

DIP AT COLLAR  $-90^{\circ}$   
 BEARING -  
 DEPTH 135.6 m (445 ft)

$$17.7 - 23.8 = 6.1 \text{ m (20 ft)}$$

Ag 83.43 g/t

Pb 4.72%

Zn 8.34%

$$49.4 - 53.5 = 4.1 \text{ m (13.5 ft)} \text{ Ag } 38.37 \text{ g/t}$$

Pb 2.20% Zn 5.11%

$$67.5 - 71.0 = 3.5 \text{ m (11.5 ft)}$$

Ag 39.13 g/t

Pb 2.19%

Zn 5.83%

$$91.2 - 94.2 = 3.0 \text{ m (10 ft)} \text{ Ag } 36.86 \text{ g/t}$$

Pb 2.37% Zn 4.58%

$$96.5 - 101.8 = 5.3 \text{ m (17 ft)}$$

Ag 36.94 g/t

Pb 2.24%

Zn 4.64%

now

$$99.5 - 101.8 = 2.3 \text{ m (7.5 ft)} \text{ Ag } 37.10 \text{ g/t}$$

Pb 2.23% Zn 4.52%

now

$$110.8 - 114.6 = 3.8 \text{ m (12.5 ft)} \text{ Ag } 104.06 \text{ g/t}$$

Pb 5.97% Zn 8.65%

E.C.J.

DDH A 158 Continued

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
546	115.8	117.2	1.4	25.37	2.08	2.70
	117.2	118.1	0.9	0.00	0.00	0.00
547	118.1	119.9	1.8	43.54	3.20	4.70
	119.9	121.0	1.1	0.00	0.00	0.00
548	121.0	123.4	2.4	52.46	3.38	5.75
	123.4	125.7	2.3	0.00	0.00	0.00
549	125.7	127.8	2.1	105.94	6.10	11.23
550	127.8	129.3	1.5	18.17	1.38	3.88
551	129.3	131.2	1.9	32.23	2.40	4.75
	131.2	135.6	4.4	0.00	0.00	0.00

END OF HOLE

110.8 - 131.2 = 20.4m (67ft)

Ag 46.38 g/t  
Pb 2.92 %  
Zn 4.77 %

E.C.J.

DDH A 159

16.9.76 - 19.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	102.7	102.7	0.00	0.00	0.00
549	102.7	105.2	2.5	38.40	2.70	2.18
	105.2	107.5	2.3	0.00	0.00	0.00
550	107.5	109.2	1.7	35.31	3.38	2.70
551	109.2	110.8	1.6	42.51	3.10	2.73
552	110.8	112.4	1.6	55.54	3.38	3.30
	112.4	148.4	36.00	0.00	0.00	0.00

END OF HOLE

LATITUDE IS 10590.66  
DEPARTURE TOW. 7589.925  
ELEVATION 1287.454

DIP AT COLLAR -90°  
BEARING  
DEPTH 148.4 m (490ft)

107.5 - 112.4 = 4.9m (16ft)

Ag 44.26 g/t  
Pb 3.29 %  
Zn 2.97 %

LOW

18. 9. 76 . 21. 9. 76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb%	Zn%
	0.0 ✓	49.2 ✓	49.2	0.00	0.00	0.00
553 B	49.2 ✓	51.2 ✓	2.0	25.37 ✓	1.43 ✓	3.18 ✓
554	51.2 ✓	52.7 ✓	1.5	23.31 ✓	1.00 ✓	2.70 ✓
555	52.7 ✓	53.6 ✓	0.9	28.46 ✓	1.53 ✓	2.65 ✓
556	53.6 ✓	54.9 ✓	1.3	34.29 ✓	1.85 ✓	5.62 ✓
557	54.9 ✓	56.1 ✓	1.2	17.14 ✓	1.13 ✓	2.90 ✓
	56.1 ✓	65.9 ✓	9.8	0.00	0.00	0.00
558	65.9 ✓	67.5 ✓	1.6	41.49 ✓	2.50 ✓	6.15 ✓
559	67.5 ✓	69.1 ✓	1.6	48.34 ✓	3.23 ✓	4.85 ✓
560	69.1 ✓	70.2 ✓	1.1	51.43 ✓	2.90 ✓	6.00 ✓
	70.2 ✓	71.4 ✓	1.2	0.00	0.00	0.00
561	71.4 ✓	73.0 ✓	1.6	51.43 ✓	2.70 ✓	7.88 ✓
562	73.0 ✓	74.6 ✓	1.6	72.69 ✓	4.76 ✓	6.32 ✓
563	74.6 ✓	75.7 ✓	1.1	28.46 ✓	1.88 ✓	3.40 ✓
	75.7 ✓	79.2 ✓	3.5	0.00	0.00	0.00
564	79.2 ✓	81.2 ✓	2.0	19.20 ✓	1.13 ✓	1.10 ✓
	81.2 ✓	84.3 ✓	3.1	0.00	0.00	0.00
565	84.3 ✓	87.8 ✓	3.5	17.14 ✓	1.10 ✓	1.10 ✓
	87.8 ✓	88.6 ✓	0.8	0.00	0.00	0.00
566	88.6 ✓	90.3 ✓	1.7	15.09 ✓	0.80 ✓	1.03 ✓
	90.3 ✓	95.6 ✓	5.3	0.00	0.00	0.00
567	95.6 ✓	98.5 ✓	2.9	23.37 ✓	1.72 ✓	3.83 ✓
568	98.5 ✓	100.0 ✓	1.5	7.20 ✓	0.60 ✓	1.50 ✓
569	100.0 ✓	101.5 ✓	1.5	29.14 ✓	1.80 ✓	4.18 ✓
570	101.5 ✓	102.1 ✓	0.6	35.31 ✓	2.50 ✓	6.51 ✓
	102.1 ✓	108.0 ✓	5.9	0.00	0.00	0.00
571	108.0 ✓	111.3 ✓	3.3	28.46 ✓	1.85 ✓	2.95 ✓
572	111.3 ✓	113.7 ✓	2.4	15.09 ✓	0.55 ✓	1.43 ✓
	113.7 ✓	116.8 ✓	3.1	0.00	0.00	0.00
573	116.8 ✓	119.8 ✓	3.0	8.23 ✓	0.55 ✓	0.48 ✓
	119.8 ✓	120.6 ✓	0.8	0.00	0.00	0.00
574	120.6 ✓	122.1 ✓	1.5	21.26 ✓	1.83 ✓	3.75 ✓
575	122.1 ✓	123.6 ✓	1.5	53.49 ✓	3.10 ✓	6.22 ✓
576	123.6 ✓	125.2 ✓	1.6	53.49 ✓	3.38 ✓	4.80 ✓
577	125.2 ✓	126.9 ✓	1.7	53.49 ✓	3.30 ✓	5.83 ✓
	126.9 ✓	129.5 ✓	2.6	0.00	0.00	0.00

CONTINUED ON  
PAGES 192 . 193.

LATITUDE 9N  
 DEPARTURE 80W  
 ELEVATION

DIP AT COLLAR -90°  
 BEARING  
 DEPTH 145.1 m (476 ft).

$$65.9 - 74.6 = 8.7 \text{ m (28.5 ft)}$$

Ag. 45.85 g/t. Pb 2.79%

Zn. 5.39%

$$122.1 - 126.9 = 4.8 \text{ m (16 ft)}$$

Ag. 53.49 g/t. Pb 3.26%

Zn 5.61%

DDH A160 Continued

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
578	129.5 ✓	130.0 ✓	0.5	17.14 ✓	1.18 ✓	2.65 ✓
579	130.0 ✓	132.0 ✓	2.0	32.23 ✓	2.10 ✓	4.86 ✓
580	132.0 ✓	132.9 ✓	0.9	44.23 ✓	2.75 ✓	5.35 ✓
581	132.9 ✓	134.1 ✓	1.2	43.20 ✓	3.13 ✓	5.30 ✓
	134.1 ✓	145.1 ✓	11.0	0.00	0.00	0.00
END OF HOLE						

E.C.J.

DDH A161

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
	0.0 ✓	36.0 ✓	36.0	0.00	0.00	0.00
582 B	36.0 ✓	37.8 ✓	1.8	33.24 ✓	1.78 ✓	3.68 ✓
583	37.8 ✓	40.2 ✓	2.4	30.17 ✓	1.63 ✓	3.45 ✓
	40.2 ✓	48.7 ✓	8.5	0.00	0.00	0.00
584	48.7 ✓	49.7 ✓	1.0	32.23 ✓	1.83 ✓	4.60 ✓
585	49.7 ✓	51.3 ✓	1.6	45.26 ✓	2.95 ✓	5.35 ✓
	51.3 ✓	55.5 ✓	4.2	0.00	0.00	0.00
586	55.5 ✓	57.3 ✓	1.8	17.14 ✓	0.95 ✓	2.03 ✓
	57.3 ✓	61.6 ✓	4.3	0.00	0.00	0.00
587	61.6 ✓	63.3 ✓	1.7	14.74 ✓	0.90 ✓	1.48 ✓
588	63.3 ✓	65.5 ✓	2.2	14.74 ✓	0.85 ✓	1.13 ✓
589	65.5 ✓	67.0 ✓	1.5	21.26 ✓	1.30 ✓	2.23 ✓
590	67.0 ✓	68.5 ✓	1.5	17.14 ✓	0.83 ✓	1.73 ✓
591	68.5 ✓	70.0 ✓	1.5	25.37 ✓	1.28 ✓	2.80 ✓
592	70.0 ✓	71.5 ✓	1.5	31.20 ✓	1.78 ✓	4.55 ✓
593	71.5 ✓	74.5 ✓	3.0	33.26 ✓	2.23 ✓	3.20 ✓
594	74.5 ✓	76.8 ✓	2.3	40.46 ✓	2.10 ✓	5.70 ✓
595	76.8 ✓	77.3 ✓	0.5	15.09 ✓	0.80 ✓	1.40 ✓
	77.3 ✓	80.9 ✓	3.6	0.00	0.00	0.00
596	80.9 ✓	81.4 ✓	0.5	20.23 ✓	1.00 ✓	0.75 ✓
597	81.4 ✓	82.9 ✓	1.5	40.46 ✓	2.15 ✓	5.06 ✓
598	82.9 ✓	84.4 ✓	1.5	28.46 ✓	1.65 ✓	3.80 ✓
599	84.4 ✓	85.9 ✓	1.5	9.94 ✓	0.73 ✓	1.28 ✓
600	85.9 ✓	89.0 ✓	3.1	9.94 ✓	0.63 ✓	1.08 ✓
	89.0 ✓	109.8 ✓	20.8	0.00	0.00	0.00
701 B	109.8 ✓	111.5 ✓	1.7	31.20 ✓	2.20 ✓	3.10 ✓
	111.5 ✓	114.7 ✓	3.2	0.00	0.00	0.00

CONTINUED ON PAGES 194 &amp; 195

130.0 - 134.1 = 4.1 m (13.5 ft)

Ag. 38.10 g/t. Pb 2.54%

Zn. 5.10%

LATITUDE 9N

DEPARTURE 78W.

ELEVATION

DIP AT COLLAR -90°

BEARING

DEPTH 122.2 m (401 ft)

(E.C.J.)

DDH A 161 CONTINUED

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
702	114.7	116.4	1.7	27.43	1.50	2.23
703	116.4	118.0	1.6	91.89	5.64	5.80
704	118.0	119.7	1.7	49.37	2.85	3.98
	119.7	122.2	2.5	0.00	0.00	0.00

END OF HOLE

DDH A 162

(E.C.J.)

21.9.76 - 24.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (M)	TO (M)		Ag g/t	Pb %	Zn %
	0.0	62.3	62.3	0.00	0.00	0.00
705	62.3	63.2	0.9	17.14	1.15	1.03
706	63.2	64.8	1.6	39.43	3.10	2.60
707	64.8	66.4	1.6	48.34	3.20	1.58
708	66.4	67.9	1.5	8.23	0.13	0.25
	67.9	75.0	7.1	0.00	0.00	0.00
709	75.0	76.5	1.5	9.94	0.13	0.18
710	76.5	78.0	1.5	5.14	0.13	0.13
711	78.0	79.7	1.7	42.51	2.50	1.03
712	79.7	81.8	2.1	7.89	0.20	0.23
713	81.8	83.3	1.5	8.91	0.25	0.85
714	83.3	84.8	1.5	89.83	6.60	7.66
	84.8	130.1	45.3	0.00	0.00	0.00

END OF HOLE

116.4 - 119.7 = 3.3 m (11 ft) Ag. 69.99 g/t  
 Pb. 4.20% Zn 4.86%

LATITUDE 38. 10379.436  
 DEPARTURE 62W. 7722.609  
 ELEVATION 1274.314

DIP AT COLLAR -90°  
 BEARING  
 DEPTH 130.1 m (427 ft)



ASSAY NUMBER SECTION CORE ASSAYS

ASSAY NUMBER	SECTION	CORE	ASSAYS
715 A	15.8 / 17.4 / 1.6	15.8	0.00 / 0.00 / 1.13
716	26.9 / 26.9 / 1.0	22.29	1.58 / 2.35
717	26.9 / 28.4 / 1.5	42.51	4.03 / 3.16
718	28.4 / 29.9 / 1.5	50.40	4.80 / 5.45
719	29.9 / 31.1 / 1.2	33.26	2.48 / 4.10
720	31.1 / 32.6 / 1.5	30.17	2.63 / 2.55
721	32.6 / 34.6 / 2.0	35.31	2.78 / 2.95
722	34.6 / 35.5 / 0.9	36.34	1.88 / 5.00
723	35.5 / 38.5 / 3.0	31.20	2.00 / 4.58
724	41.5 / 41.5 / 3.0	26.42	1.92 / 4.05
725	43.0 / 43.0 / 1.5	48.34	3.88 / 6.43
726	45.4 / 45.4 / 2.4	16.11	1.20 / 2.38
727	50.4 / 50.4 / 5.0	0.00	0.00 / 0.00
728	53.0 / 55.6 / 2.6	52.46	3.35 / 6.17
729	55.6 / 55.6 / 2.7	29.14	2.23 / 4.00
730	67.9 / 69.4 / 1.5	34.29	2.08 / 4.85
731	70.7 / 70.7 / 1.3	23.31	1.65 / 3.38
732	71.8 / 73.7 / 1.9	121.03	7.48 / 13.40
733	73.7 / 75.3 / 1.6	14.06	0.93 / 2.23
734	75.3 / 76.8 / 1.5	17.14	1.03 / 2.33
735	76.8 / 78.7 / 1.9	87.77	5.65 / 12.89
736	78.7 / 79.2 / 0.5	17.14	1.15 / 3.85
737	85.5 / 85.5 / 6.3	0.00	0.00 / 0.00
738	86.2 / 86.2 / 0.7	53.49	3.48 / 7.31
739	91.7 / 92.3 / 0.6	39.43	2.43 / 4.65
740	92.3 / 93.9 / 1.6	32.23	1.83 / 2.13
741	93.9 / 95.5 / 1.6	34.29	2.33 / 3.70
742	95.5 / 98.7 / 3.2	13.03	0.78 / 1.10
743	98.7 / 100.2 / 1.5	52.46	3.38 / 5.93
744	100.2 / 103.6 / 3.4	0.00	0.00 / 0.00

CONTINUED ON PAGES 198 & 199.

DDH A163 Continued.

(E.C.J.)

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
744	103.6 ✓	104.2 ✓	0.6	130.97 ✓	7.86 ✓	16.20 ✓
745	104.2 ✓	105.8 ✓	1.6	40.46 ✓	2.35 ✓	5.20 ✓
746	105.8 ✓	107.3 ✓	1.5	14.06 ✓	0.98 ✓	3.18 ✓
	107.3 ✓	108.5 ✓	1.2	0.00	0.00	0.00
747	108.5 ✓	109.4 ✓	0.9	35.31 ✓	2.15 ✓	4.66 ✓
748	109.4 ✓	110.9 ✓	1.5	87.77 ✓	5.48 ✓	6.82 ✓
749	110.9 ✓	112.4 ✓	1.5	47.31 ✓	2.68 ✓	5.30 ✓
	112.4 ✓	119.5 ✓	7.1	0.00	0.00	0.00

END OF HOLE

103.6 - 105.8 = 2.2 m (7.2 ft)

Ag. 65.14 g/t, Pb. 3.85%, Zn 8.2%

103.6 - 112.4 = 8.8 m (29 ft)

Ag 45.32 g/t

Pb 2.74%

Zn 5.13%

108.5 - 112.4 = 3.9 m (12.8 ft)

Ag. 60.10 g/t, Pb 3.63%

Zn 5.74%

(E.C.J.)

DDH A.164

26.9.76 - 29.9.76

ASSAY NUMBER	SECTION		CORE LENGTH	ASSAYS		
	FROM (m)	TO (m)		Ag g/t	Pb %	Zn %
	0.00 ✓	83.4 ✓	83.4	0.00	0.00	0.00
750 B	83.40 ✓	84.9 ✓	1.5	14.74 ✓	0.70 ✓	1.33 ✓
751	84.9 ✓	87.9 ✓	3.0	26.40 ✓	1.35 ✓	3.43 ✓
752	87.9 ✓	89.4 ✓	1.5	13.03 ✓	0.93 ✓	2.50 ✓
	89.4 ✓	110.3 ✓	20.9	0.00	0.00	0.00

END OF HOLE

LOW GRADE

LATITUDE 14 N

DEPARTURE 80 W

ELEVATION

DIP AT COLLAR -90°

BEARING

DEPTH 110.3 m. (362 ft)