

2. NBS 2+3  
R.E-Log  
1977

015955

CYPRUS ANVIL MINING CORPORATION

DIAMOND DRILL CORE LOG

Hole Number: 71-01

Fabric Orientation Diagram:

Project: R.E-LOGGING

Location: ZONE 3

Claim: \_\_\_\_\_


Terr. Plane Co-ords.: \_\_\_\_\_ N

\_\_\_\_\_ E

Grid Co-ords.: 8118.0 N

13,975.0 E

Elevation: 3967.2

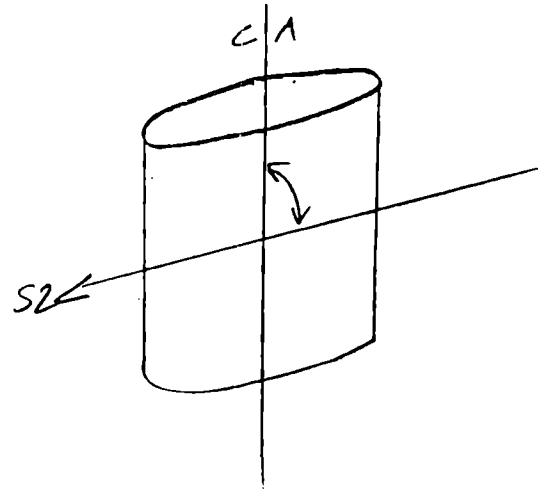

All symmetry determinations locking

NW with S2 dipping

SW with dip azimuth 210.

Total Depth: 695'

Purpose: \_\_\_\_\_

Logged by: \_\_\_\_\_ Date(s) Logged: \_\_\_\_\_

Drilling Contractor:	Core:	Size	From	To	Collar Cased and Capped:
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____
_____	_____	_____	_____	_____	_____

Started: \_\_\_\_\_ Completed: \_\_\_\_\_





Structural Log

Logged By: \_\_\_\_\_

Code	From		To		Feature	S <sub>1</sub> Dip Direct.	S <sub>2</sub> Dip Direct.		Description
	10	14	16	20			26	28	
S			1610	0	P <sub>1</sub> S <sub>1</sub> 2		40	2110	
S			1810	0	P <sub>1</sub> S <sub>1</sub> 2		80	2110	
S			11010	0	P <sub>1</sub> S <sub>1</sub> 2		59	2110	
S			11210	0	P <sub>1</sub> S <sub>1</sub> 2		80	2110	Gauge 124'-127'
S			11410	0	P <sub>1</sub> S <sub>1</sub> 2		69	2110	
S			11610	0	P <sub>1</sub> S <sub>1</sub> 2		69	2110	S2 steepens at 162'
S			11810	0	P <sub>1</sub> S <sub>1</sub> 2		57	2110	
S			12000	0	P <sub>1</sub> S <sub>1</sub> 2		59	2110	
S			12210	0	P <sub>1</sub> S <sub>1</sub> 2		68	2110	
S			12410	0	P <sub>1</sub> S <sub>1</sub> 2		55	2110	
S			12610	0	P <sub>1</sub> S <sub>1</sub> 2		60	2110	
S			12810	0	P <sub>1</sub> S <sub>1</sub> 2		70	2110	
S			13010	0	P <sub>1</sub> S <sub>1</sub> 2		62	2110	
S			13200	0	P <sub>1</sub> S <sub>1</sub> 2		63	2110	
S			13400	0	P <sub>1</sub> S <sub>1</sub> 2		71	2110	
S			13600	0	P <sub>1</sub> S <sub>1</sub> 2		77	2110	
S			13810	0	P <sub>1</sub> S <sub>1</sub> 2		60	2110	
S			14010	0	P <sub>1</sub> S <sub>1</sub> 2		68	2110	
S			14210	0	P <sub>1</sub> S <sub>1</sub> 2		56	2110	
S			14440	0	P <sub>1</sub> S <sub>1</sub> 2		50	2110	
S			14610	0	P <sub>1</sub> S <sub>1</sub> 2		70	2110	
S			14810	0	P <sub>1</sub> S <sub>1</sub> 2		75	2110	
S			15010	0	P <sub>1</sub> S <sub>1</sub> 2		72	2110	
S			15210	0	P <sub>1</sub> S <sub>1</sub> 2		54	2110	
S			15315	0	P <sub>1</sub> S <sub>1</sub> 2		73	2110	
S			15415	0	S <sub>1</sub> S <sub>2</sub>		110	2110	Steep S2 54'-550'
S			15510	0	P <sub>1</sub> S <sub>1</sub> 2		90	2110	
S			15710	0	P <sub>1</sub> S <sub>1</sub> 2		90	2110	
S			15910	0	P <sub>1</sub> S <sub>1</sub> 2		90	2110	
S			16010	0	P <sub>1</sub> S <sub>1</sub> 2		90	2110	
S			16110	0	P <sub>1</sub> S <sub>1</sub> 2		87	2110	
S			16115	0	P <sub>1</sub> S <sub>1</sub> 2		70	2110	
S			16250	0	P <sub>1</sub> S <sub>1</sub> 2		60	2110	
S			16350	0	P <sub>1</sub> S <sub>1</sub> 2		50	2110	
S			16450	0	P <sub>1</sub> S <sub>1</sub> 2		35	2110	
S			16650	0	P <sub>1</sub> S <sub>1</sub> 2		48	2110	







D.D.H. Assays

Zone 3Hole 71-3Coordinates N 9397 E 13997Collar Elevation 3997.60  
10

Bench	From	To	Feet	ASSAYS				WEIGHTED AVERAGE ASSAYS				Remarks	
				Pb	Zn	AR	Cu	Pb	Zn	Comb'd.	AR		Cu
3300	587	588	5	1.0	1.2								
	588	593	"	2.4	2.7	0	51						
	593	599	"	4.5	5.8	0	10.3						
3350	598	603	4(2)	1.6	2.9		15.6						601-638 = 37' ore intersection.
	603	608	"	1.4	3.2								
	608	613	"	0.6	1.4			1.2	2.7	*3.9%			
	613	618	"	0.8	1.9			1.6	2.9	11.5%			* for project 40' interval
	618	623	"	1.8	3.3	0			1.6				1.2 Pb; 2.7 Zn = 39%
	623	628	"	1.4	2.7				1.5				
	628	633	"	0.8	3.9								
	633	638	"	1.5	2.4								
				17.8	31.4								
				1.6		2.8							
				17.8	11	31.4							
				1.5		2.4							
				0.6		3.0							



D.D.H. Assays

Zone

3

Hole

71-4

Coordinates

N 7983

E

14402

Collar Elevation

2.64  
3991.14

Bench	From	To	Feet	ASSAYS				WEIGHTED AVERAGE ASSAYS					REMARKS
				Pb	Zn	Az	Cu	Pb	Zn	Comb'd.	Az	Cu	
3370	504	509	5	0.5	1.6								
	509	514	"	2.1	3.6								
	514	519	"	0.6	1.6								
	519	524	"	1.9	2.9								
3430	524	529	"	3.2	5.6								521-548 = 27' ore intersection
	529	534	"	3.9	5.8			30	4.8	*7.8%			
	534	539	"	6.0	1.4								
	539	544	"	1.3	6.0								*for projection (40' interval)
	544	548	4	1.1	6.8								2.2 Pb; 2.5 Zn = 5.7%

D.D.H. Assays

Zone 3Hole 71-5Coordinates N 7721 E 14596 Collar Elevation 4000.00<sup>1.50</sup>

Bench	From	To	Feet	ASSAYS				WEIGHTED AVERAGE ASSAYS				Remarks	
				Pb	Zn	Ag	Cu	Pb	Zn	Const'd.	Ag		Cu
3470	517	522	5	5.9	6.1								
	522	527	"	3.6	5.6								
	527	532	" (12)	0.8	4.7								
3470	532	537	"	2.9	5.2								530-557 = 27' <sup>gate</sup>
	537	542	"	3.0	5.8			2.7	5.0	*7.7%			intersection
	542	547	"	2.1	3.7								
	547	552	"	2.4	4.6								* for projection (40' interval)
	552	557	"	3.7	6.0								Pb 2.1; Zn 4.0% = 6.1%



71-1

615.5 - 616.5 massive sulphides  
616.5 - 630 dissem. sulphides.  
700' end of D.D.H.

71-2  
71-3

Collier elev.  
3967.15

71-2

532 - 539 gfc with dissem sulphides  
539 - 546 massive sulphides  
546 - 555.5 dissem "  
555.5 - 584 dissem "  
603' end of D.D.H.

4.99  
~~4003.49~~

71-3

583 - 593 dissem sulphides  
593 - 598 massive "  
598 - 640 dissem "  
645' end of D.D.H.

2.60  
~~3991.10~~

71-4

500.5 - 526 dissem sulphides.  
526 - 547 massive "  
547 - 570 dissem -  
570' end of D.D.H.

2.64  
~~3991.14~~

71-5

514 - 517.5 dissem sulphide  
517.5 - 527.5 massive "  
527.5 - 547 dissem banded sulphides.  
547 - 560.5 dissem sulphides.  
567' end of D.D.H. ? ? ? ?

1.50  
~~4000.00~~



CYPRUS ANVIL MINING CORPORATION

DIAMOND DRILL CORE LOG

Hole Number: 71-05

Fabric Orientation Diagram:

Project: RE-LOGGING

Location: ZONE 3

Claim: \_\_\_\_\_

Terr. Plane Co-ords.: \_\_\_\_\_ N

\_\_\_\_\_ E

Grid Co-ords.: 7721.0 N

14,596.0 E

Elevation: 4001.5


Total Depth: 567' 1

Purpose: \_\_\_\_\_

Logged by: \_\_\_\_\_ Date(s) Logged: \_\_\_\_\_

Drilling Contractor:	_____	Core:	Size	From	To	Collar Cased and Capped: _____
				_____	_____	
				_____	_____	
				_____	_____	

Started: \_\_\_\_\_ Completed: \_\_\_\_\_

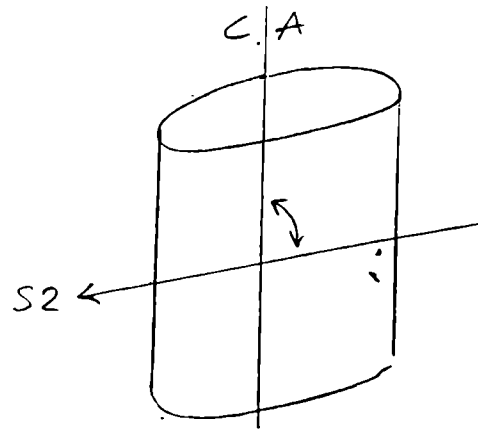

All symmetry determinations locking \_\_\_\_\_ with \_\_\_\_\_ dipping \_\_\_\_\_ with dip azimuth \_\_\_\_\_.





DDH 7.1-05  
2 8

Cyprus Anvil Mining Corp.  
Structural Log

Page 4 of 6  
Logged By: \_\_\_\_\_

Code	From				To				Feature	E N	S <sub>1</sub>		S <sub>2</sub>		Description
	10	14	16	20	22	24	26	28			Dip	Direct.	Dip	Direct.	
S				13	20	P1S12					6	8	21	10	
S				15	20	P1S12					6	7	21	10	
S				17	20	P1S12					6	8	21	10	
S				19	20	P1S12					7	0	21	10	
S				11	10	P1S12					7	3	21	10	
S				11	30	P1S12					8	0	21	10	
S				11	50	P1S12					6	8	21	10	
S				11	70	P1S12					5	5	21	10	
S				11	90	P1S12					7	7	21	10	
S				12	10	P1S12					6	5	21	10	
S				12	30	P1S12					8	0	21	10	
S				12	50	P1S12					7	5	21	10	
S				12	70	P1S12					7	6	21	10	
S				12	90	P1S12					5	4	21	10	
S				13	10	P1S12					6	0	21	10	
S				13	30	P1S12					5	5	21	10	
S				13	50	P1S12					7	2	21	10	
S				13	70	P1S12					6	0	21	10	
S				13	90	P1S12					6	2	21	10	
S				14	10	P1S12					6	5	21	10	
S				14	30	P1S12					6	2	21	10	
S				14	35	P1S12					2	5	21	10	
S				14	40	P1S12					6	0	21	10	
S				14	50	P1S12					7	0	21	10	
S				14	60	P1S12					7	5	21	10	
S				14	70	P1S12					1	0	21	10	Stop S2 467' - 479'
S				14	78	P1S12					1	0	21	10	
S				14	80	P1S12					6	0	21	10	
S				14	90	P1S12					7	0	21	10	
S				15	10	P1S12					7	5	21	10	
S				15	17	P1S12					6	3	21	10	
S				15	27	P1S12					5	5	21	10	
S				15	37	P1S12					6	7	21	10	
S				15	47	P1S12					7	8	21	10	
S				15	52	P1S12					6	7	21	10	
S				15	57	P1S12					7	0	21	10	









