

CURRAGH RESOURCES INC.

Inter-Office Memorandum

TO: Leo Hwodyk
Project Supervisor - Mine
Faro Minesite

FROM: Gregg A. Jilson
Vice-President, Exploration
Whitehorse Office

RE: FARO DRILLING

017738

DATE: 01 12 1990

I am fundamentally in agreement with the drilling proposal and priorities you have laid out. In light of the uncertainties in the drill data we discussed at my last visit to Faro, I suggest the following modifications which move holes into the path of the proposed tunnels:

1. add three holes along North haulageway "A" at:
 - : 14505E/7820N;
 - : 14660E/7625N; and
 - : 14775E/7490N.


2. move one hole along middle haulageway "C" and add another:
 - : hole 08 from current location to 14505E/7270N;
 - : add hole at 14480E/7510N; and
 - : move hole 12 to 14760E/7250N to reflect repositioning of hole 08.

The above holes would be complimented with a hole near the junction of the haulageways at 14340E/8035N.

These holes would confirm early tonnage as well as give a firmer target for underground development to shoot at. If drilled, the holes should be carefully surveyed for downhole displacements.

To preserve footage with the addition of new holes, I would suggest deferring hole 16 and possibly 14 and 12 to later in the program.

GAJ*geb

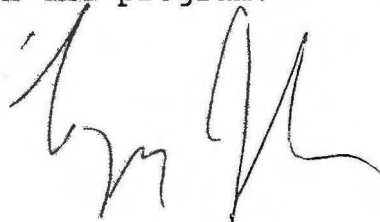

FARO Undergrowth

URGENT!

AS SOON AS POSSIBLE

18232

FROM

LEO Hwozdyj

DEPT.

COPY TO

SEND TO

G. JILSOO

DATE

Dec 27 / 89


SUBJECT

MESSAGE

RE: SURFACE DID - FARO U/L

FOR YOUR COMMENTS - SURFACE
DID ROLES for 1990 mining.

REPLY



4S500E - 1

← SPEEDIMEMO →

MOORE SPEEDILY - 1 - MOORE CLEAN PRINT PATENTED 1963-1966

REPLY
FROM

DATE

TO REPLY,
WRITE REPLY IN BOTTOM AREA
RETAIN ORIGINAL & RETURN THIS COPY.

CURRAGH RESOURCES INC

FARO YUKON

INTER-OFFICE MEMORANDUM

DATE: December 27, 1989

TO: Bill Weymark
General Manager

FROM: Leo Hwozdyk
Mine Project Superintendent

SUBJECT: EXPLORATION HOLES FOR SOUTH-WEST BLOCK - FARO UNDERGROUND

Monies is requested to drill some additional surface diamond drill holes.

To fill in some of the gaps between existing diamond drill holes, 7 holes are being proposed. The added drill footage would confirm the projected thickness and footwall elevation in the proposed area for the 1990 mining program. The total footage proposed amounts to 3,800 foot or budget cost of \$114,000.

The second priority drilling would concentrate in the bottom half of the mine. This program could be deferred until such time as an evaluation can be made of the information and benefits of surface diamond drilling programs versus underground development.

The enclosed table and drawing detail the total program proposed.



Leo Hwozdyk
Mine Project Superintendent

LH/lp

EXPLORATION HOLES
FOR SOUTH-WEST BLOCK
FARO UNDERGROUND

The new holes were located on the actual pit cross sections -
pattern 200 ft.

Number of holes: 18
Length feet: 13,000

Hole No.	Length ft.	Priority Holes ft.
01	800	-
02	1000	-
03	400	400
04	600	-
05	850	-
06	850	-
07	950	-
08	800	800
09	850	-
10	950	-
11	300	300
12	600	600
13	300	300
14	750	750
15	800	-
16	650	650
17	750	-
18	800	-
TOTAL	13000	3800

Priority holes are located in the area mineable in 1990.