


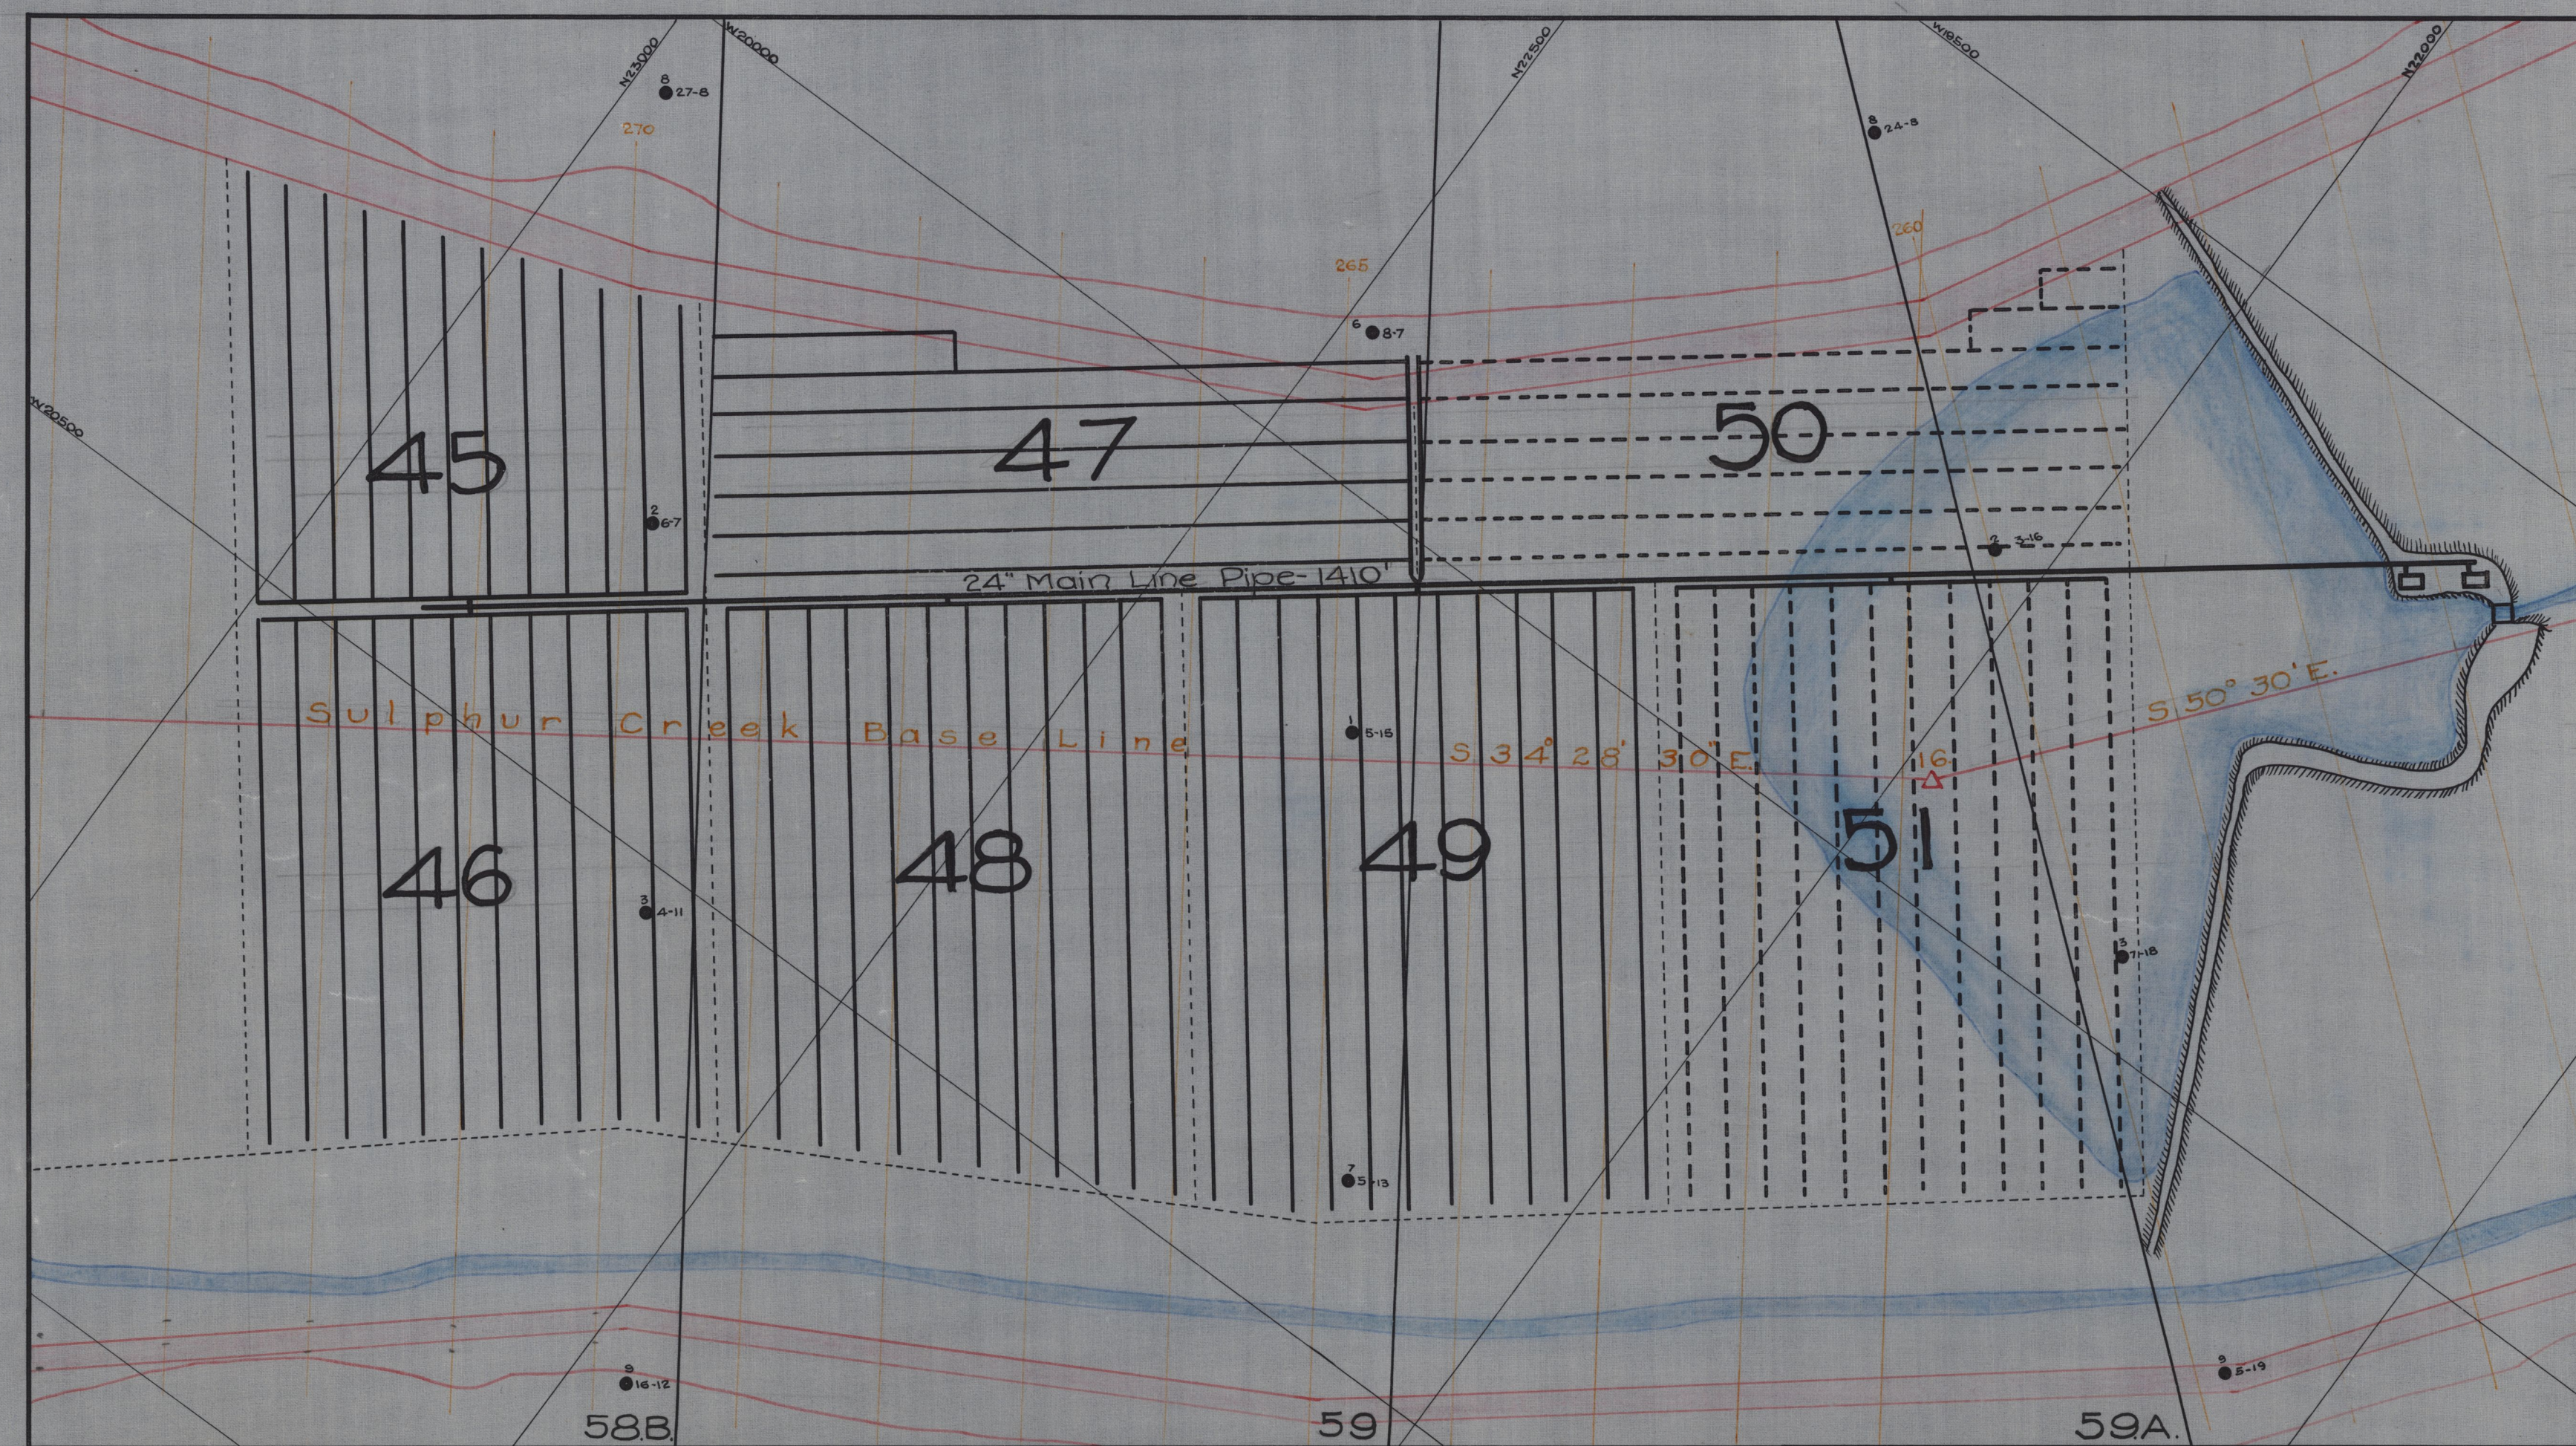

UNIT NO.	AREA Sq.Yds	No. of POINTS	AVERAGE DEPTH			TOTAL FOOTAGE	VOLUME CU.Yds.
			MUCK	GR.	B'k.		
45	9690	399	5	7	2	4788	45220
46	13650	562	5	10	2	8430	77350
47	9165	377	5	18	2	5278	48880
48	14821	610	5	12	2	10370	93866
49	16179	666	5	14	3	13320	118646
50	8910	367	5	11	2	5872	53460
51	16109	664	5	16	2	13944	123502
TOTAL	88424	3645				62002	560924.4

Probable driving rate per 9hr. Shift 120 ft.
Probable driving season May 10th to Aug. 15th 98 days
Driving crew required Feet ÷ (days x rate) 6 men
Order in which units will be driven
Point spacing 16 centers throughout

- LEGEND**
- 5-10 Drill Hole. Thawed Frozen Part Thawed
 - Depth of Gravel
 - Depth of remaining Muck.
 - Pipe Line 1st Position.
 - Pipe Line 2nd Position.
 - Unit Boundary.
 - Dredge Limit and
 - Required Top of Bank.
 - Actual Top of Bank.
 - Creek and Drain.

YUKON CONS. GOLD CORP. LTD.
DAWSON, Y.T.

No. 8. THAWING LAYOUT.
1943. SEASON.

DRAWN HVGW & AMN. SCALE 1"=100'
TRACED AMN.
DATE JAN. 7, 1943
CHECKED