

N<sup>o</sup> 1

008521


MATT BERRY MINES LIMITED

PROGRESS REPORT

April 30, 1969

Leon La Prairie

Managing Director

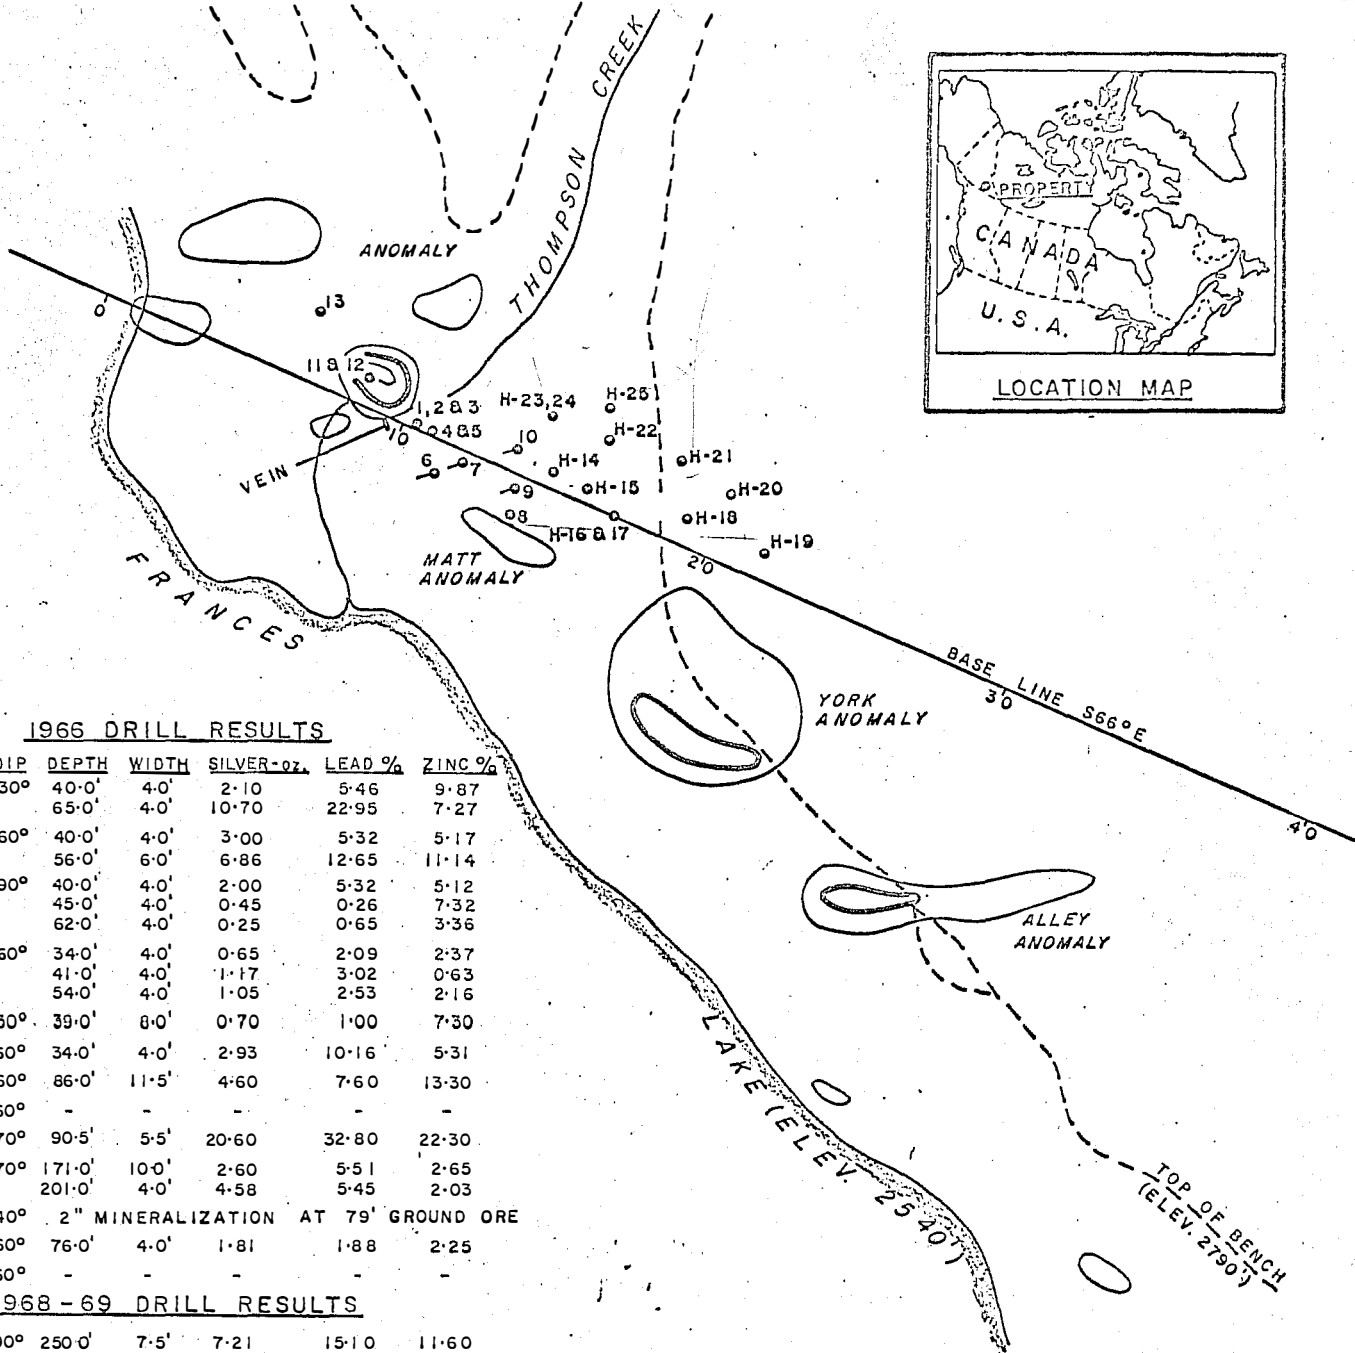

**1966 DRILL RESULTS**

HOLE NO.	DIP	DEPTH	WIDTH	SILVER-oz.	LEAD %	ZINC %
1	30°	40-0'	4-0'	2-10	5-46	9-87
		65-0'	4-0'	10-70	22-95	7-27
2	60°	40-0'	4-0'	3-00	5-32	5-17
		56-0'	6-0'	6-86	12-65	11-14
3	90°	40-0'	4-0'	2-00	5-32	5-12
		45-0'	4-0'	0-45	0-26	7-32
		62-0'	4-0'	0-25	0-65	3-36
4	60°	34-0'	4-0'	0-65	2-09	2-37
		41-0'	4-0'	1-17	3-02	0-63
		54-0'	4-0'	1-05	2-53	2-16
5	30°	39-0'	8-0'	0-70	1-00	7-30
6	60°	34-0'	4-0'	2-93	10-16	5-31
7	60°	86-0'	11-5'	4-60	7-60	13-30
8	60°	-	-	-	-	-
9	70°	90-5'	5-5'	20-60	32-80	22-30
		171-0'	100-0'	2-60	5-51	2-65
10	70°	201-0'	4-0'	4-58	5-45	2-03
		11 40° 2" MINERALIZATION AT 79' GROUND ORE				
12	60°	76-0'	4-0'	1-81	1-88	2-25
13	60°	-	-	-	-	-

**1968-69 DRILL RESULTS**

H-14	90°	250-0'	7-5'	7-21	15-10	11-60
H-15	90°	291-5'	4-8'	2-90	5-89	5-35
H-16	90°	89-0'	9-0'	2-19	4-24	6-24
H-17	60°	63-0'	9-5'	0-63	2-30	7-50
H-18	90°	185-0'	3-0'	1-00	1-71	1-48
H-19	90°	117-0'	2-6'	3-20	0-97	1-04
H-20	90°	349-0'	ZONE INDEFINITE			
H-21	75°	340-0'	LOST HOLE - CAVING - TO BE RE-DRILLED			
H-22	75°	326-0'	4-0'	2-38	7-06	4-56
		338-0'	4-0'	5-30	11-31	16-95
		345-0'	3-4'	3-67	7-00	4-5
H-23	70°	285-0'	3-8'	4-14	8-00	17-90
H-24	90°	286-0'	4-0'	0-45	0-60	9-83
H-25	70°	399-8'	4-0'	2-10	7-45	6-19
		411-0'	2-0'	2-50	5-14	1-08

~~474-5'~~ NOW BEING ASSAYED

460 7.0 3.70 6.36 11.4%

MATT BERRY MINES LTD.

WATSON LAKE, AREA, Y.T.

LOCATION OF GEOPHYSICAL ANOMALIES

& DIAMOND DRILL HOLES

DATE May 12, 1969

0' 600' 1200'

SCALE IN FEET

Presently line cutting is underway  
is preparation of a Turam Survey.

MATT BERRY MINES LIMITED

PROGRESS REPORT

Period ending April 31, 1969

SUMMARY

The Matt Berry Mines property holdings consist of 3 groups comprising of 83 unpatented mineral claims. The holdings are located 96 miles north of Walson Lake and some 12 miles east of the Ross River highway, Yukon Territory.

Since the start of exploration on the Matt Zone, field work has comprised of prospecting and trenching, a limited geochemical and geophysical survey and 6,192 feet of diamond drilling.

→ The current tonnage based on 24 completed drill holes is now indicated at an inferred 400,000 tons averaging 4.2 oz. silver per ton and 17% combined lead and zinc.

The "Matt Zone" is open on both the strike and depth extension. The Zone is near a granite-sedimentary contact which is the same regional structure that ore deposits are associated with in the Dynasty and Swin Lake area that is some 90 miles to the north of the Matt Berry holdings.

FILED ACTIVITIES

During the month of April, 1,334 feet of drilling was completed which consisted of holes No. 23, 24 and 25. The summary of the drilling is as follows:

Hole No. 23 at 75°

Depth 435 feet casing 47 feet

Location 14+00 Base Line, 2+00 N24°E,  
direction S39°W Elevation 2718

Objective To probe the depth extension of the Matt Zone.

Results The hole intersected the Matt Zone from 272 to 289.8' with mineralization occurring in two sections: from 274' to 275' and from 285' to 289.8.

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
274	1.0'	1.84	5.5	5.4
285	3.8	4.14	8.0	17.9

MATT BERRY MINES LIMITED

PROGRESS REPORT

FIELD ACTIVITIES (con't)

Hole No. 24 at 90°  
Depth 409 feet Casing 32 feet  
Location 14+00 Base Line 2+00 N24°E Elevation 2713  
Objective To probe the depth extension of the Matt Zone  
Results The Matt Zone mineralization was intersected at 286 feet to 289 feet and from 303 feet to 308 feet.

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
286.0	4.0	0.45	0.60	9.83

\* \* \*

Hole No. 25 at 70°  
Depth 500 feet Casing 56 feet  
Location 15+60 Base line 3+50 N24°E Elevation 2743  
Objective To probe the extension of the dip extension of Matt Zone  
Results Intersected two mineralized sections:

<u>Depth</u>	<u>Width</u>	<u>Silver-oz.</u>	<u>Lead%</u>	<u>Zinc%</u>
399.8	4.0	2.10	7.45	6.19
411.0	2.0	2.50	5.14	1.08

~~474.5 Now being assayed~~

\* \* \*

466.0 7.0 3.70 6.36 11.4% L.L.

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS - Hole 1 - 13 (1966)

<u>WIDTH</u>	<u>FROM</u>	<u>TO</u>	<u>SILVER</u>	<u>LEAD</u>	<u>ZINC</u>
<u>Hole No. 1 @ 30° - Section S-10 + 50</u>					
3.5 ft.	40.0	43.5	2.3 oz.	6.25	11.69
2 ft.	66.0	68.0	21.4 oz.	45.84	14.54
<u>Hole No. 2 @ 60° - Section S-10 + 50</u>					
2 ft.	38	40	6.1 oz.	10.65	10.34
5 ft.	57	62	7.9 oz.	16.34	13.01
<u>Hole No. 3 @ 90° - Section S 10 + 50</u>					
2 ft.	41	43	4.0 oz.	10.65	10.34
3 ft.	45.5	48½	.6 oz.	.3 %	9.79%
1 ft.	64.5	65.5	1.0 oz.	2.6	13.39%
<u>Hole No. 4 @ 60° - Section S 11+ 100</u>					
1 ft.	36	37	2.8 oz.	8.38	9.49
2 ft.	42	44	4.7 oz.	12.09	2.53
2 ft.	55	57	4.2 oz.	10.13	8.74
<u>Hole No. 5 @ 90° - Section S 10 + 50</u>					
8 ft.	39	47	.7	1.0 %	7.30%
<u>Hole No. 6 @ 60° - Section 11 + 50</u>					
3 ft.	34	37	3.9	13.54	7.08
<u>Hole No. 7 @ 60° - Section S 12 + 00</u>					
<u>Hole No. 8</u> NIL					
<u>Hole No. 9 @ 70° - Section S 15 + 50</u>					
1 ft.	61	62	8.6	13.7	2.3
2 ft.	77	79	.7	1.2	16.4
4.5 ft.	90.5	95.0	20.6	32.8	22.3
<u>Hole No. 10 @ 70° - Section S 13 + 00</u>					
10 ft.	171.0	181.0	2.62	5.51	2.56
1.5 ft.	202.5	204.0	12.2	17.2	5.4

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS - 1966 (con't)

Hole No. 11 @ 40° - Section 8 + 25

Two veins had been cut, one at 69 feet and one about 79 feet. Core recovery was extremely poor and the scattered mineralization recovered was not assayed.

Hole No. 12 @ 60° - Section 8 + 25

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
2½ ft.	78.5	81.0	2.9	3.0	3.6

The above intersection is from a fracture zone and appears to be the main MATT ZONE - recovery was extremely poor in area of the sulphides.

Hole No. 13 @ 90° - Section 6 + 10

No mineralized intersections were cut and it appears that the hole was set too far to the east to intersect the main MATT ZONE.  
Holes No. 14 - 17 - 1968

Hole No. 14 @ 90° - Section 14 + 75

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
7.5	250.5	258.0	7.20	15.08	11.60

Hole No. 15 @ 90° - Section 16 + 50

4.8	191.5	196.3	2.93	5.87	5.35
-----	-------	-------	------	------	------

Hole No 16 @ 90° - Section 18 + 50

9.0	89.0	98.0	2.19	4.24	6.24
-----	------	------	------	------	------

Hole No. 17 @ 60° - Section 18 + 50

9.5'	63.0	79.0	.63 oz.	2.3%	7.9%
------	------	------	---------	------	------

Hole No. 18 @ 90° - Section 18 + 50 - start of 1969 drilling

3.0'	185'	188	1.0	1.71	1.48
	185'	246	Matt Zone - Scattered mineralization		

Hole No. 19 @ 90° - Section 21 + 50

2.6	117.3'	119.9	3.20	0.97	1.04
	108.5	152.1	Matt Zone - Scattered Mineralization		

MATT BERRY MINES LIMITED

PROGRESS REPORT

DIAMOND DRILL ASSAY RESULTS 1968 (con't)

Hole No. 20 @ 90° - Section 20 + 00

<u>Width</u>	<u>From</u>	<u>To</u>	<u>Silver</u>	<u>Lead</u>	<u>Zinc</u>
	239'	350'	Matt Zone - Scattered mineralization		

Hole No. 21 @ 75° - Section 18+00

To be deepened

Hole No. 22 @ 75° Section 16+00

2.3	327.7	330.0	4.14	12.3	7.4
2.4	339.6	342.0	9.10	17.4	26.1
3.4	345.0	348.4	3.67	7.0	4.5

Hole No. 23 @ 75° - Section 14+00

3.8	286	289.8	4.14	8.00	17.9
-----	-----	-------	------	------	------

Hole No. 24 @ 90° Section 14 + 00

3.9	285.9	289.8	.46	.62	10.0
2.0	306.2	308.3	.62	1.30	10.3

Hole No. 25 @ 70° Section 15 + 60

4.0'	399.8	403.8	2.10	7.46	6.19
2.0	411.0	413.0	2.50	5.14	1.08
	474.5	now being assayed			
7.0'	460.0		3.70	6.36	11.48 L.L.

MATT BERRY MINES LIMITED

PROGRESS REPORT

1966 DRILLING COMPLETED

Hole No. 66 - 1	-	12 foot casing	166' depth
66-2	-	15 foot casing	122' "
66-3	-	12 foot casing	71'
66-4	-	12 foot casing	141'
66-5	-	8 foot casing	93'
66-6	-	34 foot casing	148'
66-7	-	25 foot casing	25'
66-7A	-	56 foot casing	141'
66-8	-	25 foot casing	178'
66-9	-	18 foot casing	18'
66-10	-	12 BX casing	246'
66-11	-	12 foot casing	194'
66-12	-	10 foot casing	100'
66-13	-	32 foot casing	279'
66-14	-	42 foot casing	<u>69'</u> (hole frozen in)

Total footage drilled in 1966 - 1,991'

1968 DRILLING COMPLETED

Hole No. 66-14	-	42 foot casing	205' in December
68-15	-	61.5 foot casing	421'
68-16	-	31.5 foot casing	112'
68-17	-	37.0 foot casing	<u>37.0'</u>

Total footage drilled in 1968 775.0'

1969 DRILLING COMPLETED

Hole No. 68-17	-	see above	78
69-18	-	93.0 foot casing	331'
69-19	-	82.0 foot casing	407'
69-20	-	117 foot casing	433'
69-21	-	110 foot casing	340'
69-22	-	77 foot casing	503'
69-23	-	47 foot casing	425'
69-24	-	32 foot casing	409'
69-25	-	63 foot casing	<u>500'?</u>

Total footage drilled in 1969 3,426'

Total footage drilled to date 6,192'

MATT BERRY MINES LIMITED

PROGRESS REPORT

SUMMARY OF CLAIM HOLDINGS

Frances Lake - Watson Lake Mining Division, Yukon Territory

<u>RECORDED</u>	<u>CLAIMS</u>	<u>REGISTRATION</u>	<u>STATUS</u>	<u>EXPIRY</u>
Matt 1 - 8 86874-82	8	Matt Berry	Unpatented	Jan. 7, 1971
Jim 1 - 4 86882-85	4	Matt Berry	Unpatented	Jan. 7, 1971
Berry 1-8 7688-95	8	"	"	"
Berry 15-20 7702-07	6	"	"	"
Berry 25-30 7712-17	6	"	"	"
Yoshi 8 - 28 28935-55	21	L. La Prairie	"	Feb. 19, 1970
Yoshi 37-46 28964-73	10	"	"	"
Sam 1-20 28986-29005	<u>20</u>	"	"	"
	83			

MATT BERRY MINES LIMITED

PROGRESS REPORT

COMPANY SHARE DATA SUMMARY

1)	<u>Issued Shares (Qualified for trading)</u>		<u>Monies Received</u>
	Free Vendor	75,000	\$ -
	Barclay & Crawford Ltd. (1966)	200,000	50,000.00
	La Prairie 1966 management option	100,000	25,000.00
	York 1966 management option	20,000	5,000.00
	1968 Underwriting	100,000	30,000.00
		100,000	35,000.00
		50,000	20,000.00
	La Prairie 1968 management option	50,000	15,000.00
	A. Arsenault 1968 qualification	38,500	9,625.00
	P. Smith - employee service	3,000	750.00
2)	<u>Issued shares (to be qualified)</u>		
	La Prairie 1968 management option	50,000	15,000.00
	Manifold 1968 management option	25,000	10,500.00
3)	<u>Management option</u>		
	Manifold @ 25¢ - expires June 30/71	15,000	
	Vendor escrowed - Datlasaka Mines	290,000	
	- 1966 underwriting	<u>135,000</u>	
		425,000	<u>\$215,875.00</u>
	Total shares issued and optioned	1,261,500	

SUMMARY

Capitalization	5,000,000
Issued trading	736,500
Issued escrowed	425,000
Management option	15,000
To be qualified	85,000
Treasury shares	3,741,500