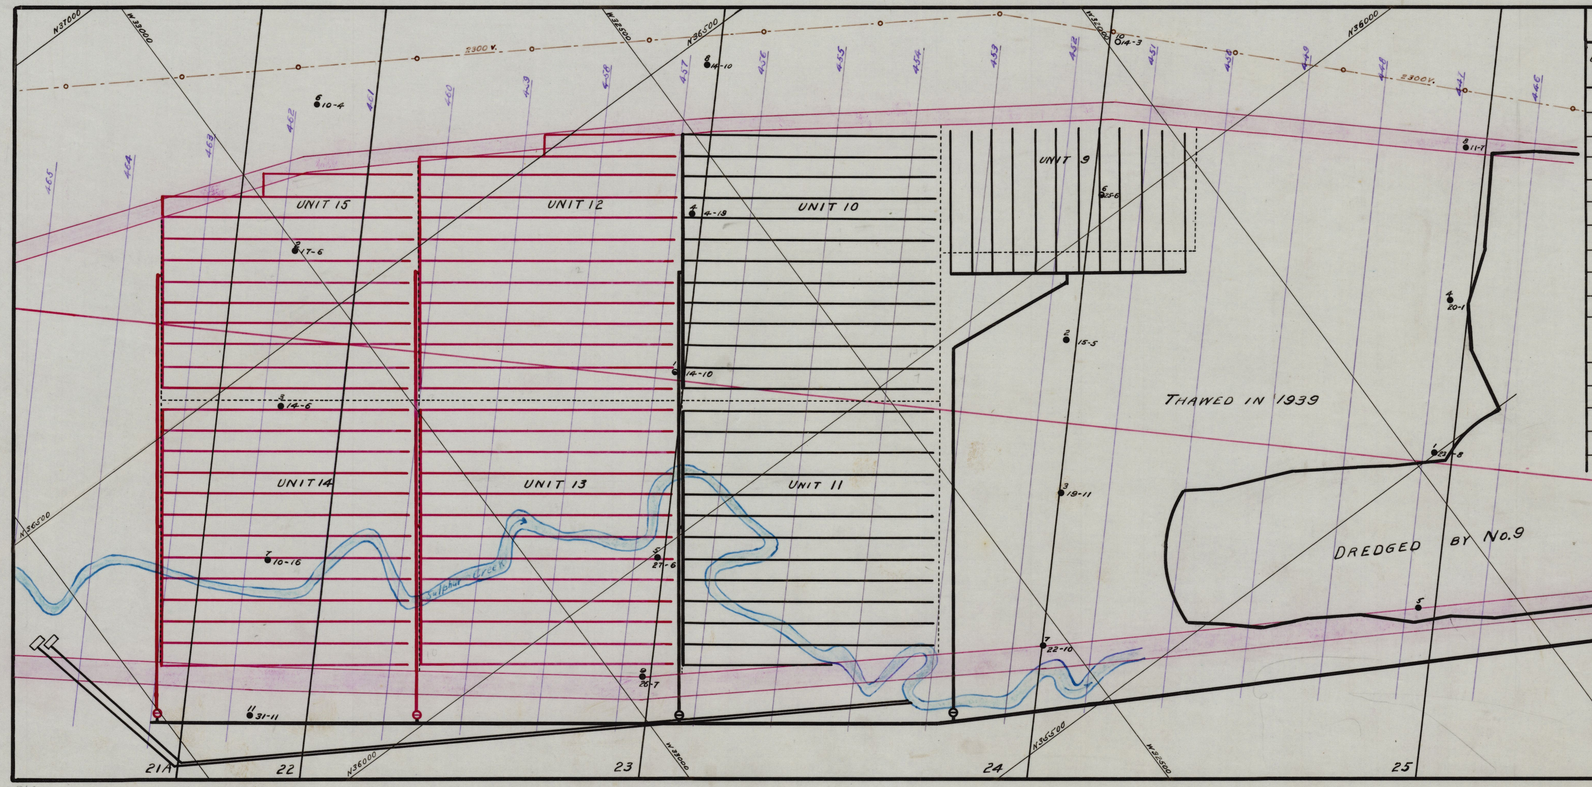

DRIVING DATA

UNIT No.	AREA SQ. YDS.	No. OF POINTS	AVERAGE DEPTHS MUCK	GR.	B'K	TOTAL FOOTAGE	VOLUME CU. YDS.
9	6160	750	25	6	2	23250	67760
10	12987	1580	12	12	2	37920	112554
11	12654	1540	23	8	2	47740	139194
12	12317	1501	12	9	2	31521	94430
13	13447	1638	16	8	3	40950	121023
14	12765	1564	12	11	3	37536	110630
15	10434	1270	15	6	3	27940	83472
	80764	9843				246857	729063

Probable driving rate per 9 hr. shift 200 ft.

Probable driving season May 12 to Aug. 25 106 days

Order in which units will be driven 9-10-11-12 13-14-15

Driving crew required Feet ÷ (Days x Rate) 12 men

Point Spacing 9' Centers throughout

LEGEND

- 14-10 Drill Hole — Thawed, Frozen, Part Thawed
- No. — Depth of Gravel
- Depth of Remaining Muck
- Pipe Line 1st Position
- Pipe Line 2nd Position
- Unit Boundary
- Dredge Limit and Top of Stripping Bank (Theor.)
- Outline of Dredge Cut
- Creeks and Drains
- Power Lines

YUKON CONS. GOLD CORP. LTD.

DAWSON, Y.T.

No 9 THAWING LAYOUT

1940 SEASON

DRAWN BY: A.M.N. & H.V.G.W.
TRACED BY: H.V.G.W.
DATE: Nov. 17, 1939
REVISED:

SCALE 1" = 100'

№ 4041

e011079494

YCGC25077